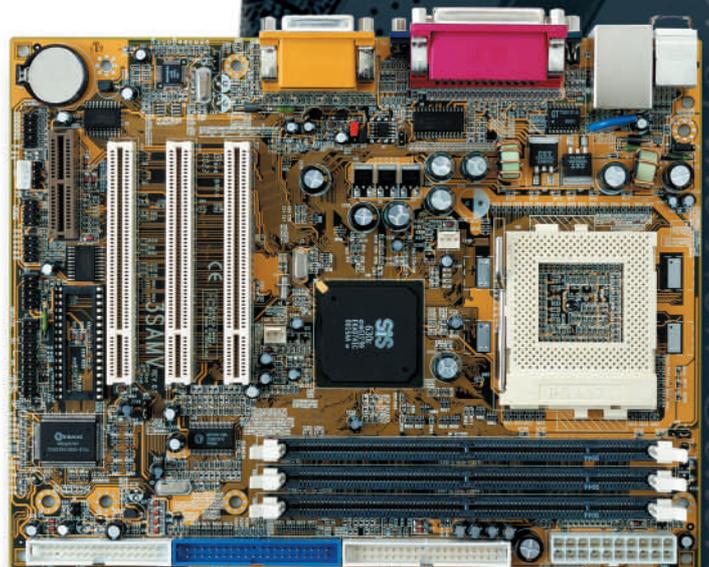# 3SAMV

Processor	Socket370 Platform for Intel® Celeron™ PPGA Processor 366~733MHz Socket370 Platform for Intel® Coppermine™ FC-PGA Processor up to 800Mhz
Cache	Intel® Celeron™ PPGA CPU On-Die 128KB Level 2 cache Intel® Coppermine™ FC-PGA CPU On-Die 128KB/256KB Level 2 cache
Front Side Bus	66 / 100 Mhz
Chipset	SiS® 630E
System Memory	3xDIMM Socket Up To 512GB, support 100Mhz 3.3V SDRAM
On-board AGP	Ultra AGP, Unified Memory Architecture , with 2/4/8/16/32/64 MB system memory.
On-board Audio	Support AC'97 CoDec 2.1 Compliant.
Expansion Slots	3 x PCI Slot. 1 x AMR Slot.
On-board I/O	2 x Serial Port. 1 x Parallel Port (ECP, EPP Support) 2 x IDE Port. (Ultra DMA 33/66 Support) 1 x Floppy Port(3 Mode, Up to 2.88MB). 2 x USB external Port 3 x USB internal pin header 2 x PS/2 Keyboard & Mouse. 1 x VGA Port 2 x Infra-Red Port (IR/CIP). 1 x 100/10Mbps Fast Ethernet Port. 1 x Game/Midi Port.
System BIOS	2Mb Flash ROM.
Power	For Micro ATX Power supply. Power On by LAN, RTC Alarm, Modem Ring or power button Power Off by Windows 95/98 or power button
Form Factor	Micro ATX, 244 x 190 mm
Feature	Hardware Monitoring Support CPU Voltage, Fan Status LAN 100/10Mbps Fast Ethernet (Option). Dual Ultra DMA/66 IDE Ports Bundled Anti-virus software
Driver	AC'97 Audio driver SiS® 630E driver

Intel Socket 370 CPU Mainboard with SiS® 630E Chipset design in Micro-ATX form factor.