


# INFORMTECH INTERNATIONAL, INC. UN1072

Q1/95

Data bus: 16-bit, ISA  
 Size: Half-length, half-height card  
 Hard drive supported: Two IDE (AT) interface drives  
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

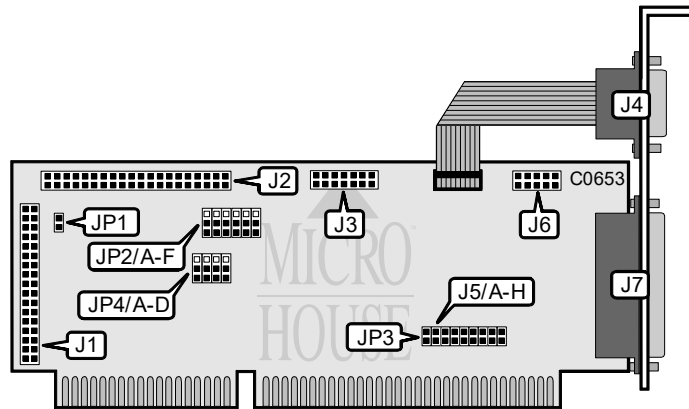

CONNECTIONS	
Function	Location
34-pin control cable connector - floppy drive	J1
40-pin IDE (AT) Interface connector	J2
Game port	J3
9-pin serial port 1 - external	J4
10-pin serial port 2 - internal	J6
25-pin parallel port	J7
2-pin connector - drive active LED	JP1

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Parallel port is output only	JP3	Closed
Parallel port is input only	JP3	Open

SERIAL PORT 1 CONFIGURATION - JP2		
COM/Address	Jumper A	Jumper B
COM1/3F8h	Pins 1 & 3 closed	Pins 2 & 3 closed
COM3/3E8h	Pins 1 & 2 closed	Pins 2 & 3 closed
COM4/2E8h	Pins 1 & 3 closed	Pins 2 & 3 closed
Disabled	Pins 1 & 2 closed	Pins 2 & 3 closed

Continued on next page . . .

**INFORMTECH INTERNATIONAL, INC.**  
**UN1072**

... continued from previous page

SERIAL PORT 2 CONFIGURATION - JP2			
COM/Address	Jumper C		Jumper D
COM2/2F8h	Pins 1 & 3	closed	Pins 1 & 2
COM3/3E8h	Pins 1 & 3	closed	Pins 1 & 3
COM4/2E8h	Pins 1 & 2	closed	Pins 1 & 3
Disabled	Pins 1 & 2	closed	Pins 1 & 2

SERIAL PORT 1 INTERRUPT SELECT - J5			
IRQ	Jumper F	Jumper G	Jumper H
IRQ4	Open	Open	Closed
IRQ3	Open	Closed	Open
IRQ5	Closed	Open	Open
Disabled	Open	Open	Open

SERIAL PORT 2 INTERRUPT SELECT - J5			
IRQ	Jumper C	Jumper D	Jumper E
IRQ3	Open	Open	Closed
IRQ4	Open	Closed	Open
IRQ5	Closed	Open	Open
Disabled	Open	Open	Open

PARALLEL PORT CONFIGURATION - JP2			
LPT/Address	Jumper E		Jumper F
LPT1/378h	Pins 1 & 2	closed	Pins 1 & 3
LPT2/278h	Pins 1 & 3	closed	Pins 1 & 2
LPT3/3BCh	Pins 1 & 3	closed	Pins 1 & 3
Disabled	Pins 1 & 2	closed	Pins 1 & 2

PARALLEL PORT INTERRUPT SELECT - J5			
IRQ	Jumper A	Jumper B	
IRQ7	Open	Closed	
IRQ5	Closed	Open	
Disabled	Open	Open	

Continued on next page ...

INFORMTECH INTERNATIONAL, INC.  
UN1072

... continued from previous page

IDE PORT CONFIGURATION - JP4		
Address	Jumper A	Jumper B
i 3F6h	Pins & 2 closed	Pins : & 3 closed
376h	Pins : & 3 Closed	Pins : & 3 closed
Disabled	N/A	Pins & 2 closed

FLOPPY DRIVE CONFIGURATION - JP4		
Address	Jumper C	Jumper D
i 3F0h	Pins & 2 closed	Pins : & 3 closed
376h	Pins : & 3 Closed	Pins : & 3 closed
Disabled	N/A	Pins & 2 closed