


# SR330-L SR330-L20C

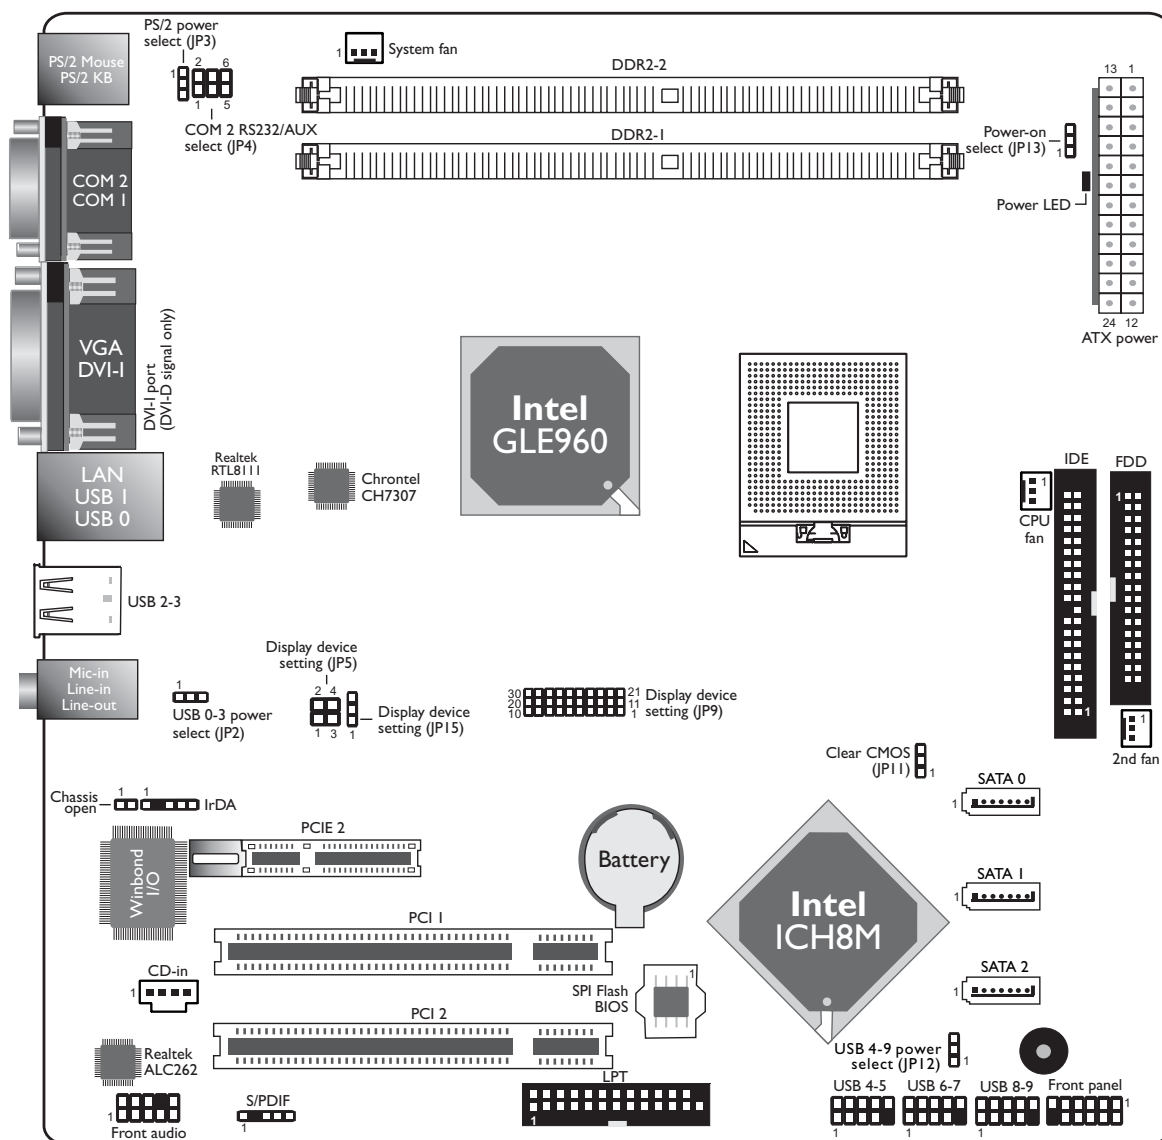

COM 2 RS232/AUX	JP4	USB Power: 0-3 (JP2), 4-9 (JP12)		
RS232	1-3, 2-4 On (default)	5V (default)	1-2 On	
Auxiliary power	3-5 (5V), 4-6 (12V) On	5V_standby	2-3 On	
Clear CMOS Data	JP11	PS/2 Power	JP3	
Normal (default)	1-2 On	5V (default)	1-2 On	
Clear CMOS Data	2-3 On	5V_standby	2-3 On	
Display Device Settings		JP5	JP15	JP9
Onboard DVI-D enabled. (default)		1-2, 3-4 On	1-2 On	1/5-11/15 On, 6/10-16/20 On
Power-on Select		JP13		
Power-on via power button (default)		1-2 On		
Power-on via AC power		2-3 On		