


**Socket 478
(Pentium 4)**

ASKA® SST-5652MCD

ATI® 9100IGP DDR MICRO ATX MOTHERBOARD

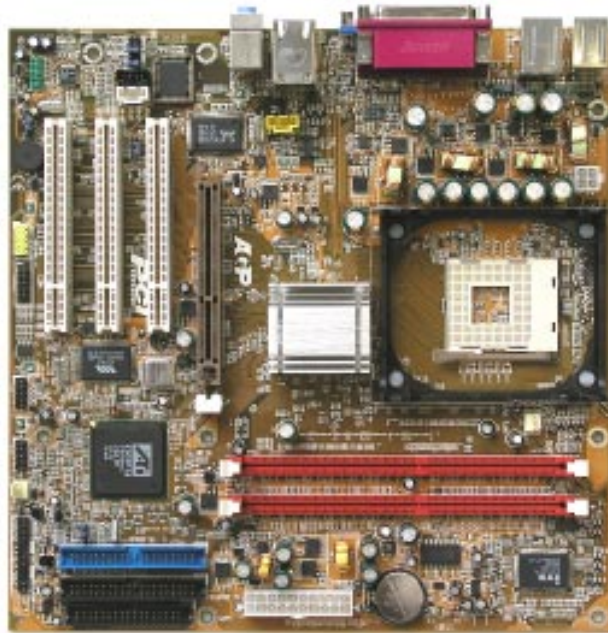

DMI COMPLY



Software Bundle



SPECIFICATION : -

Processor

- Intel® Pentium® 4/5 (Prescott) (Socket 478) (533/800MHz FSB)

Chip Set

- ATI® RS300 + IXP150/IXP200

BIOS

- Phoenix (Award) PnP Flash ROM BIOS

Memory

- Two DDR Sockets Supports up to 1GB (Dual Channel DDR400)

Expansion Slot

- One AGP Slot
- Three PCI Slots

Graphics

(RADEON 9200 (RV280)

DirectX 8.1 core)

- Integrated 128-bit 3D/2D Graphics Engines with DirectX 8.1 hardware support.
- Hardware Motion Compensation and IDCT & Hardware MPEG2 Decode (DVD).
- 8 to 128MB Frame Buffer Shared with System Memory.
- Integrated 24-bit 350MHz RAMDAC.
- Integrated TV Encoder, Macrovision Support, Composite and S-Video Out (Via Cable Adapter), Pal & NTSC Support.
- 8X AGP Slot
- Integrated AC97 Controller with Standard AC97 Codec
- 6 Channel Audio Codec Support (Optional)
- Optional 10/100 Mb/s Lan (Realtek)
- Integrated in chipset, USB2.0 x 6
- Optional Two IEEE 1394 Firewire Ports (Via Cable Adapter)
- Integrated ATA100 and Serial ATA-150 Controller
- Two Channels Parallel ATA100 Connector (Support up to 4 Devices)
- One FDD Port (Support 3 Mode, 1.2/1.44/2.88 MB FDD)
- One Audio Port (Line-in, Line-out, MIC-in)
- One PS/2 Mouse Port
- One PS/2 Keyboard Port
- One Parallel Port
- One/Two Serial Port
- One VGA Port
- Two USB Ports on Back Panel, 4 USB on Header with Optional Cable
- One RJ45 Port
- PC-cillin2002 Anti Virus
- 244mm x 244mm, Micro ATX Form Factor

AGP Slot

Audio

Lan

USB 2.0

IEEE 1394

IDE & Serial ATA-150

Storage & IO Connector

Software

Board Size