


INTEL 440ZX MICRO ATX MOTHERBOARD

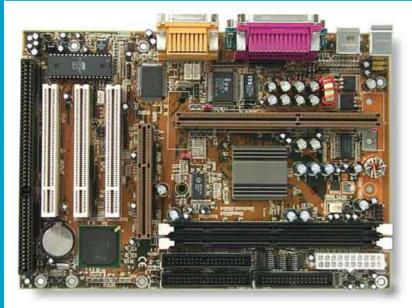

SPECIFICATION: -

Chip Set

BIOS

Cache

Memory

On Board I/O

Expansion Slot













Software Bundle



Processor - Intel® Pentium® II/III & Celeron® (66/100Mhz Front Side Bus) (Slot 1 Type).

- 233/266/300/333/350/366/400/433/450/466/500/533/550/600/650/667/700MHz or above.

- Intel® 440ZX

- 2M Flash EPROM (Support PnP, APM, ACPI, ATAPI, DMI).

- IDE AUTO LBA Mode Supports HDDs over 8.4GB.

Anti-Virus Protection.

Trend Micro ChipAway Virus Protection.

- L2 Cache is CPU Built-in. - Size up to 256MB.

- Two 168-pins DIMMs.

- DIMMs Depth of 1MB, 2MB, 4MB, 8MB, 16MB and 32MB.

- Support Two PCI Enhanced IDEs PIO Mode 3, Mode 4 and Ultra DMA 33 Channels. Twin Headers for Four IDE Devices Including IDE HDDs and CD ROMs.

Support Two FDDs of 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB.

One ECP/EPP Parallel Port, Two 16550A UART Serial Ports, Two USB Ports,

PS/2 Mouse Port, PS/2 Keyboard Port.

On Board Sound - Creative ES1373 PCI Sound Chip. - PnP, Creative 3D Enhancement, Wave Synth Wave Table.

- Full-Duplex, Sound Blaster 16 Compatible.

- Line-in, Line-out, Mic-in and MIDI/Game Port .

One ISA Bus Slots (One PCI Shared Slot). Three PCI Bus Slots (One ISA Shared Slot).

One Accelerated Graphics Port (AGP).

Plug and Play Plug and Play Specification 1.1.

Plug and Play for DOS®, Windows® 3.x, and Windows® 95.

PC97/98 PC97/98 Ready, PC99 Color Connector.

Support SMM, APM and ACPI. Power Management Comply to Energy Star "Green PC" Program.

Supports WAKE-ON-LAN (WOL).

Supports Modem Ring-in Wake Up.

PCI - PCI 2 1 AGP - AGP 1.0.

VRM - On Board VRM 8.4. Battery - On-board Lithium Battery.

Others - CPU Frequency Multiplier Jumperless (optional).

- Alarm Wake-up.

Bundle "PC-cillin 6" Anti Virus Software

Board Size 170mm x 244mm, Micro ATX Form Factor.

All brand names and trademarks mentioned are property of their respective owners. Specifications are subject to change without further notice