


# Socket 7



# SST-5851

## VIA APOLLO MVP4 MICRO ATX MOTHERBOARD

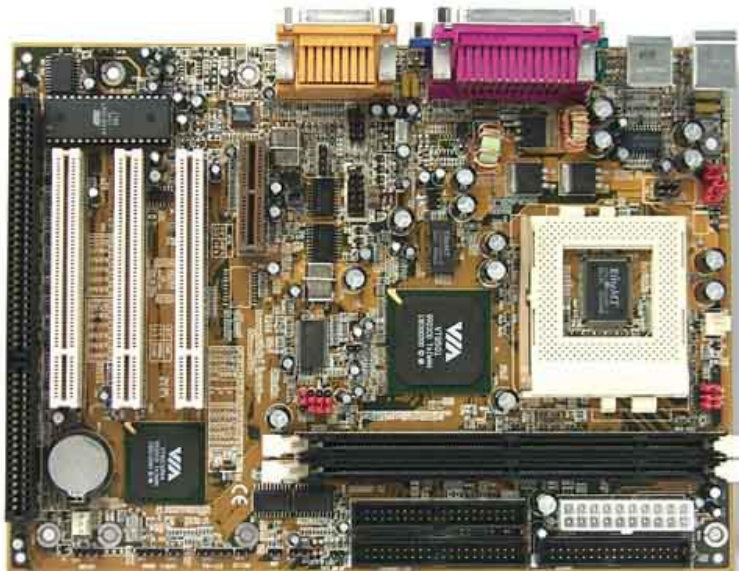

### SPECIFICATION : -

Processor	<ul style="list-style-type: none"><li>- Intel® Pentium®, Cyrix®6x86/6x86L/6x86MX/MII, AMD® K5/K6/K6-3, IBM® 6x86/6x86L/6x86MX, IDT WinChip C6 (66, 75, 83, 100MHz Front Side Bus).</li><li>- 166/180/200/233/266/300/350/400/450/500MHz or above.</li><li>- Intel® Pentium® Processors with MMX™Technology.</li><li>- Socket 7 CPU Upgradability.</li></ul>
Chip Set	<ul style="list-style-type: none"><li>- VIA® APOLLO MVP4</li></ul>
BIOS	<ul style="list-style-type: none"><li>- 2MB Flash EPROM (Support PnP, APM, ATAPI &amp; Windows® 95).</li><li>- IDE AUTO LBA Mode Supports HDDs over 8.4GB.</li><li>- Anti-Virus Protection.</li></ul>
External Cache	<ul style="list-style-type: none"><li>- Direct Mapped L2 Write Back Cache.</li></ul>
Memory	<ul style="list-style-type: none"><li>- 512KB On-board Synchronous Pipelined Burst SRAM.</li><li>- 8MB to 256MB.</li><li>- Two 168-pins DIMMs (64bit) Synchronous DRAM (SDRAM).</li><li>- DIMMs Depth of 1MB, 2MB, 4MB, 8MB and 16MB.</li></ul>
On Chip AGP	<ul style="list-style-type: none"><li>- AGP v1.0 Compliant.</li><li>- Transfer Rate up to 533MB/sec.</li><li>- 64-bit Single Cycle 2D/3D Graphic Engine.</li><li>- Support 2 to 8MB Frame Buffer Shared with System Memory.</li><li>- Integrated 24-bit 230MHz RAM DAC.</li><li>- Resolution up to 1600 x 1200.</li><li>- DirectX 6 &amp; OpenGL API.</li><li>- Win95 VXD, Win98/NT5 Minport Driver Support.</li></ul>
On Board I/O	<ul style="list-style-type: none"><li>- Support Two PCI Enhanced IDEs PIO Mode 3, Mode 4 and Ultra DMA 33/66 Channels (Optional Ultra DMA 66 Cable). Twin Headers for Four IDE Devices Including IDE HDDs and CDROMs.</li><li>- Support Two FDDs of 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB.</li><li>- One ECP/EPP Parallel Port, Two 16550A UART Serial Ports, Two USB Ports, PS/2 Mouse Port, PS/2 Keyboard Port, IrDA Port (Optional TX/RX Module).</li></ul>
On Board Sound	<ul style="list-style-type: none"><li>- On Chip AC97 Audio Controller with Standard AC97 Codec.</li><li>- PnP, Full-Duplex, Sound Blaster Pro, Direct Sound Ready.</li><li>- Line-in, Line-out, Mic-in and MIDI/Game Port (via Cable).</li></ul>
Expansion Slot	<ul style="list-style-type: none"><li>- One ISA Bus Slots.</li><li>- Three PCI Bus Slots.</li><li>- One Audio Modem Riser (AMR).</li></ul>
Plug and Play	<ul style="list-style-type: none"><li>- Plug and Play Specification 1.1.</li><li>- Plug and Play for DOS®, Windows® 3.x, and Windows® 95.</li></ul>
PC97/98	<ul style="list-style-type: none"><li>- PC97/98 Ready PC99 Color Connector.</li></ul>
Power Management	<ul style="list-style-type: none"><li>- Support SMM &amp; APM.</li><li>- Comply to Energy Star "Green PC" Program.</li></ul>
PCI	<ul style="list-style-type: none"><li>- PCI 2.1 Compliant.</li></ul>
Others	<ul style="list-style-type: none"><li>- On-board Lithium Battery.</li><li>- Bundle "PC-cillin 6" Anti Virus Software</li></ul>
Board Size	<ul style="list-style-type: none"><li>- 178mm x 244mm, Micro ATX Form Factor.</li></ul>



DMI COMPLY



Software Bundle

