


VIA 694X APOLLO PRO133A ATX MOTHERBOARD



SPECIFICATION: -



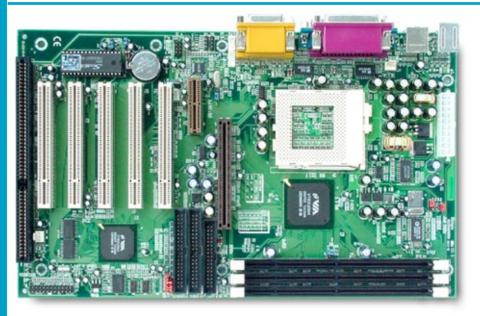





Socket 370





Software Bundle



Processor

Chip Set

BIOS

Cache

Memory

On Board I/O

Expansion Slot

Others

- Intel® Pentium® III & Celeron® (66/100/133Mhz Front Side Bus) (PGA370 Type).
- 300/333/350/366/400/433/450/466/500/533/550/600/650/667/700MHz or above.
- VIA® Apollo Pro133A (694X + 686A).
 - 2M Flash EPROM (Support PnP, APM, ACPI, ATAPI, DMI).
 - IDE AUTO LBA Mode Supports HDDs over 8.4GB.
 - Trend Micro ChipAway Virus Protection.
 - L2 Cache is CPU Built-in.
 - Size up to 768MB.
 - Three 168-pins DIMMs.
 - Synchronous DRAM (SDRAM).
 - DIMMs Depth of 1MB, 2MB, 4MB, 8MB, 16MB and 32MB.
 - Support Two PCI Enhanced IDEs PIO Mode 3, Mode 4 and Ultra DMA 33/66 Channels (Optional Ultra DMA 66 Cable). Twin Headers for Four IDE Devices Including IDE HDDs and CDROMs.
 - Support Two FDDs of 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB.
 - One ECP/EPP Parallel Port, Two 16550A UART Serial Ports, Four USB Ports, PS/2 Mouse Port, PS/2 Keyboard Port.
- On Board Sound - Integrated AC97 Controller with Standard AC97 Codec.
 - PnP, Full-Duplex, Sound Blaster 16 Compatible, Direct Sound Ready.
 - Line-in, Line-out, Mic-in and MIDI/Game Port . One ISA Bus Slots (One PCI Shared Slot).
 - Five PCI Bus Slots (One ISA Shared Slot).
 - One Accelerated Graphics Port (AGP).
 - One Audio Modem Riser (AMR).
- Plug and Play Plug and Play Specification 1.1.
 - Plug and Play for DOS®, Windows® 3.x, and Windows® 95. PC97/98 Ready, PC99 Color Connector.
- PC97/98 Power Management Support SMM, APM and ACPI.
 - Comply to Energy Star "Green PC" Program.
 - Supports Modem Ring-in Wake Up.
- PCI - PCI 2.1. AGP - AGP 2.0 / 1.0. VRM On Board VRM 8.4. Battery On-board Lithium Battery.
 - CPU Frequency Multiplier Jumperless (Optional).
 - Alarm Wake-up
 - Bundle "PC-cillin 6" Anti Virus Software
- Board Size - 305mm x 180mm, ATX Form Factor.