


Socket 370



SST-5888

VIA APOLLO PRO133 BABY AT MOTHERBOARD

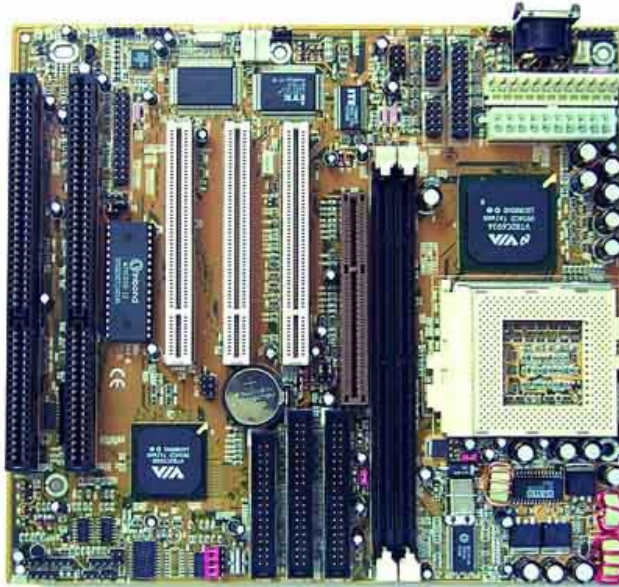

SPECIFICATION : -

| | |
|------------------|--|
| Processor | <ul style="list-style-type: none">- Intel® Pentium® III & Celeron® (66/100Mhz Front Side Bus) (PGA 370 Type).- 300/333/350/366/400/433/450/466/500/533/550/600/650/667/700MHz or above. |
| Chip Set | <ul style="list-style-type: none">- VIA® Apollo PRO133 (693A + 596A or 596B) |
| BIOS | <ul style="list-style-type: none">- 2M Flash EPROM (Support PnP, APM, ACPI, ATAPI, DMI).- IDE AUTO LBA Mode Supports HDDs over 8.4GB.- Trend Micro ChipAway Virus Protection. |
| Cache Memory | <ul style="list-style-type: none">- L2 Cache is CPU Built-in.- Size up to 512MB.- Two 168-pins DIMMs.- Synchronous DRAM (SDRAM).- DIMMs Depth of 1MB, 2MB, 4MB, 8MB, 16MB and 32MB. |
| On Board I/O | <ul style="list-style-type: none">- Support Two PCI Enhanced IDEs PIO Mode 3, Mode 4 and Ultra DMA 33/66 (596B ver. only & Optional Ultra DMA 66 Cable) Channels. Twin Headers for Four IDE Devices Including IDE HDDs and CDROMs.- Support Two FDDs of 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB.- One ECP/EPP Parallel Port. Two 16550A UART Serial Ports.- Two USB Ports (Optional Adapter Cable).- PS/2 Mouse Port (Optional Adapter Cable). Keyboard Port.- IrDA Port (Optional TX/RX Module). |
| Expansion Slot | <ul style="list-style-type: none">- Two ISA Bus Slots (One PCI Shared Slot).- Three PCI Bus Slots (One ISA Shared Slot).- One Accelerated Graphics Port (AGP). |
| Plug and Play | <ul style="list-style-type: none">- Plug and Play Specification 1.1. |
| PC97/98 | <ul style="list-style-type: none">- Plug and Play for DOS®, Windows® 3.x, and Windows® 95. |
| Power Management | <ul style="list-style-type: none">- PC97/98 Ready.- Support SMM, APM and ACPI.- Comply to Energy Star "Green PC" Program.- Supports Modem Ring-in Wake Up. |
| PCI | <ul style="list-style-type: none">- PCI 2.1. |
| AGP | <ul style="list-style-type: none">- AGP 1.0. |
| VRM | <ul style="list-style-type: none">- On Board VRM 8.2. |
| Battery | <ul style="list-style-type: none">- On-board Lithium Battery. |
| Others | <ul style="list-style-type: none">- CPU Frequency Multiplier Jumperless (Optional).- Alarm Wake-up- Bundle "PC-cillin 6" Anti Virus Software |
| Board Size | <ul style="list-style-type: none">- 200mm x 220mm, Baby AT Form Factor. |



DMI COMPLY



Software Bundle

