
Socket 370



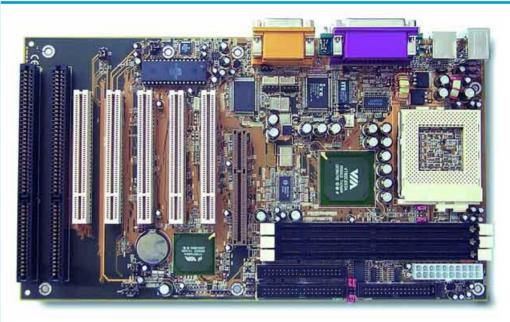

SPECIFICATION: -

BIOS

Cache

Memory

On Board I/O

















Processor - Intel® Pentium® III & Celeron® (66/100Mhz Front Side Bus) (PGA 370 Type).

- 300/333/350/366/400/433/450/466/500/533/550/600/650/667/700MHz or above.

Chip Set - VIA® Apollo PRO133 (693A + 596A or 596B)

- 2M Flash EPROM (Support PnP, APM, ACPI, ATAPI, DMI).

- IDE AUTO LBA Mode Supports HDDs over 8.4GB.

Trend Micro ChipAway Virus Protection.

- L2 Cache is CPU Built-in.

- Size up to 768MB.

- Three 168-pins DIMMs.

- DIMMs Depth of 1MB, 2MB, 4MB, 8MB, 16MB and 32MB.

- Support Two PCI Enhanced IDEs PIO Mode 3, Mode 4 and Ultra DMA 33/66 (596B ver. only & Optional Ultra DMA 66 Cable) Channels. Twin Headers for Four IDE Devices

Including IDE HDDs and CDROMs.

Support Two FDDs of 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB.

One ECP/EPP Parallel Port, Two 16550A UART Serial Ports, Two USB Ports,

PS/2 Mouse Port, PS/2 Keyboard Port,

Expansion Slot - Two ISA Bus Slots (One PCI Shared Slot).

- Five PCI Bus Slots.

- One Accelerated Graphics Port (AGP). Plug and Play

- Plug and Play Specification 1.1.

Plug and Play for DOS®, Windows® 3.x, and Windows® 95. PC97/98 PC97/98 Ready, PC99 Color Connector.

Support SMM, APM and ACPI. Power Management

Comply to Energy Star "Green PC" Program.

Supports WAKE-ON-LAN (WOL).

Supports Modem Ring-in Wake Up.

PCI - PCI 2 1 AGP - AGP 1.0.

VRM On Board VRM 8.2. Battery On-board Lithium Battery.

Others - CPU Frequency Multiplier Jumperless (optional).

- Alarm Wake-up.

- Bundle "PC-cillin 6" Anti Virus Software

Board Size - 173mm x 305mm, ATX Form Factor.