


S I O T 1



SST-5895

VIA APOLLO PRO133 MICRO ATX MOTHERBOARD

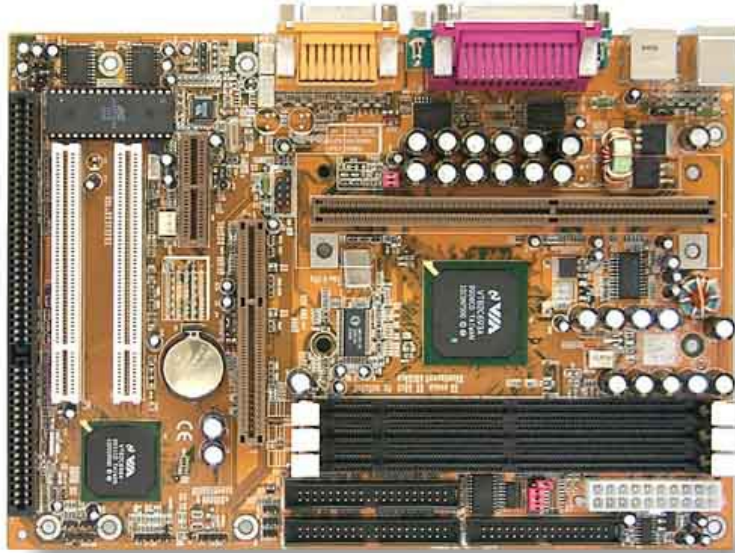

SPECIFICATION : -

Processor	<ul style="list-style-type: none">- Intel® Pentium® II/III & Celeron® (66/100/133Mhz Front Side Bus)(Slot 1 Type) .- 233/266/300/333/350/366/400/433/450/466/500/533/550/600/650/667/700MHz or above.
Chip Set	<ul style="list-style-type: none">- VIA® Apollo Pro133 (686A + 693A).
BIOS	<ul style="list-style-type: none">- 2M Flash EPROM (Support PnP, APM, ACPI, ATAPI, DMI).- IDE AUTO LBA Mode Supports HDDs over 8.4GB.- Trend Micro ChipAway Virus Protection.
Cache	<ul style="list-style-type: none">- L2 Cache is CPU Built-in.
Memory	<ul style="list-style-type: none">- Size up to 768MB.- Three 168-pins DIMMs.- Synchronous DRAM (SDRAM).- DIMMs Depth of 1MB, 2MB, 4MB, 8MB, 16MB and 32MB.
On Board I/O	<ul style="list-style-type: none">- Support Two PCI Enhanced IDEs PIO Mode 3, Mode 4 and Ultra DMA 33/66 Channels (Optional Ultra DMA 66 Cable). Twin Headers for Four IDE Devices Including IDE HDDs and CDRoms.- Support Two FDDs of 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB.- One ECP/EPP Parallel Port, Two 16550A UART Serial Ports, Two USB Ports, PS/2 Mouse Port, PS/2 Keyboard Port.
On Board Sound	<ul style="list-style-type: none">- Integrated AC97 Controller with Standard AC97 Codec.- PnP, Full-Duplex, Sound Blaster 16 Compatible, Direct Sound Ready.- Line-in, Line-out, Mic-in and MIDI/Game Port .
Expansion Slot	<ul style="list-style-type: none">- One ISA Bus Slots (One PCI Shared Slot).- Two PCI Bus Slots (One ISA Shared Slot).- One Accelerated Graphics Port (AGP).- One Audio Modem Riser (AMR).
Plug and Play	<ul style="list-style-type: none">- Plug and Play Specification 1.1.- Plug and Play for DOS®, Windows® 3.x, and Windows® 95.
PC97/98	<ul style="list-style-type: none">- PC97/98 Ready, PC99 Color Connector.
Power Management	<ul style="list-style-type: none">- Support SMM, APM and ACPI.- Comply to Energy Star "Green PC" Program.- Supports Modem Ring-in Wake Up.
PCI	<ul style="list-style-type: none">- PCI 2.1.
AGP	<ul style="list-style-type: none">- AGP 1.0.
VRM	<ul style="list-style-type: none">- On Board VRM 8.4.
Battery	<ul style="list-style-type: none">- On-board Lithium Battery.
Others	<ul style="list-style-type: none">- CPU Frequency Multiplier Jumperless (Optional).- Alarm Wake-up- Bundle "PC-cillin 6" Anti Virus Software
Board Size	<ul style="list-style-type: none">- 173mm x 244mm, Micro ATX Form Factor.



DMI COMPLY



Software Bundle

