


Slot 1



SST-5896 VIA APOLLO PRO133 ATX MOTHERBOARD

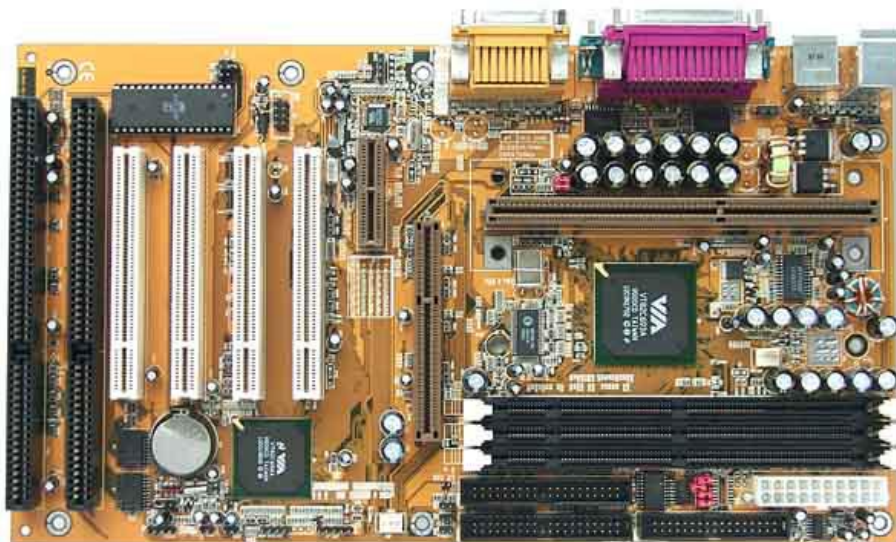

SPECIFICATION : -

Processor	<ul style="list-style-type: none"> - Intel® Pentium® II/III & Celeron® (66/100/133Mhz Front Side Bus)(Slot 1 Type) . - 233/266/300/333/350/366/400/433/450/466/500/533/550/600/650/667/700MHz or above.
Chip Set	<ul style="list-style-type: none"> - VIA® Apollo Pro133 (686A + 693A).
BIOS	<ul style="list-style-type: none"> - 2M Flash EPROM (Support PnP, APM, ACPI, ATAPI, DMI). - IDE AUTO LBA Mode Supports HDDs over 8.4GB. - Trend Micro ChipAway Virus Protection.
Cache	<ul style="list-style-type: none"> - L2 Cache is CPU Built-in.
Memory	<ul style="list-style-type: none"> - Size up to 768MB. - Three 168-pins DIMMs. - Synchronous DRAM (SDRAM). - DIMMs Depth of 1MB, 2MB, 4MB, 8MB, 16MB and 32MB.
On Board I/O	<ul style="list-style-type: none"> - Support Two PCI Enhanced IDEs PIO Mode 3, Mode 4 and Ultra DMA 33/66 Channels (Optional Ultra DMA 66 Cable). Twin Headers for Four IDE Devices Including IDE HDDs and CDROMs. - Support Two FDDs of 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB. - One ECP/EPP Parallel Port, Two 16550A UART Serial Ports, Two USB Ports, PS/2 Mouse Port, PS/2 Keyboard Port.
On Board Sound	<ul style="list-style-type: none"> - Integrated AC97 Controller with Standard AC97 Codec. - PnP, Full-Duplex, Sound Blaster 16 Compatible, Direct Sound Ready. - Line-in, Line-out, Mic-in and MIDI/Game Port .
Expansion Slot	<ul style="list-style-type: none"> - Two ISA Bus Slots (One PCI Shared Slot). - Four PCI Bus Slots (One ISA Shared Slot). - One Accelerated Graphics Port (AGP). - One Audio Modem Riser (AMR).
Plug and Play	<ul style="list-style-type: none"> - Plug and Play Specification 1.1. - Plug and Play for DOS®, Windows® 3.x, and Windows® 95.
PC97/98	<ul style="list-style-type: none"> - PC97/98 Ready, PC99 Color Connector.
Power Management	<ul style="list-style-type: none"> - Support SMM, APM and ACPI. - Comply to Energy Star "Green PC" Program. - Supports Modem Ring-in Wake Up.
PCI	<ul style="list-style-type: none"> - PCI 2.1.
AGP	<ul style="list-style-type: none"> - AGP 1.0.
VRM	<ul style="list-style-type: none"> - On Board VRM 8.4.
Battery	<ul style="list-style-type: none"> - On-board Lithium Battery.
Others	<ul style="list-style-type: none"> - CPU Frequency Multiplier Jumperless (Optional). - Alarm Wake-up - Bundle "PC-cillin 6" Anti Virus Software
Board Size	<ul style="list-style-type: none"> - 173mm x 305mm, ATX Form Factor.



DMI COMPLY



Software Bundle

