Socket 478
(Pentium 4)

SST-5903AC
VIA® P4X266E ATX MOTHERBOARD

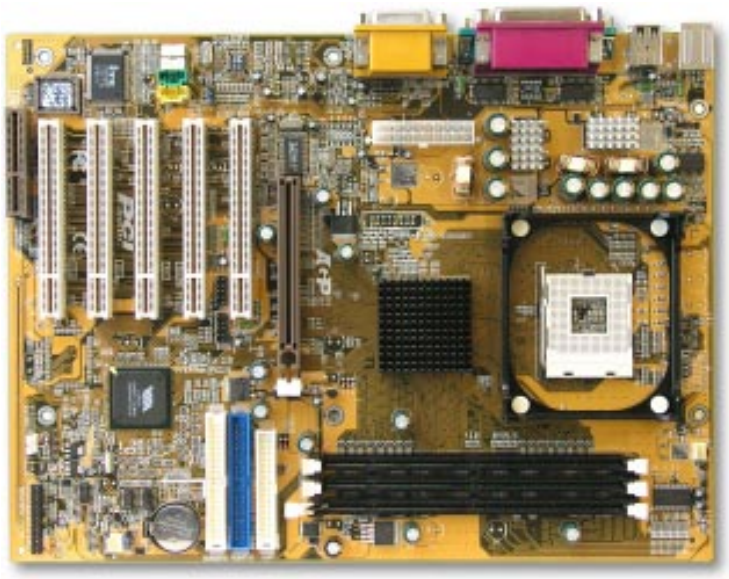

SPECIFICATION : -

Processor	-	Intel® Pentium® 4 (mPGA 478 Socket Type) (**533MHz Front Side Bus**).
Chip Set	-	VIA® P4X266E + VT8235
BIOS	-	Support PnP, APM, ACPI, ATAPI, DMI.
	-	Trend Micro ChipAway Virus Protection.
Cache	-	L2 Cache is CPU Built-in.
Memory	-	Size up 1.5GB.
	-	Three DIMMs Sockets.
On Board I/O	-	Support Two PCI Enhanced IDEs PIO Mode 3, Mode 4 and Ultra DMA 33/66/100/133 Channels. Twin Headers for Four IDE Devices Including IDE HDDs and CDROMs.
	-	Support Two FDDs of 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB.
	-	One ECP/EPP Parallel Port, Two 16550A UART Serial Ports, Six USB 2.0 Ports (Four USB Ports by Optional Adapter Cable), PS/2 Mouse Port, PS/2 Keyboard Port.
On Board Sound	-	Integrated AC97 Controller with Standard AC97 Codec.
	-	PnP, Full-Duplex, Sound Blaster and Direct Sound Ready.
	-	Line-in, Line-out, Mic-in and MIDI/Game Port.
Expansion Slot	-	Five PCI Bus Slots.
	-	One Accelerated Graphics Port (AGP).
	-	One CNR (Audio & Modem only)
Plug and Play	-	Plug and Play Specification 1.0A.
	-	Plug and Play for DOS®, Windows® 3.x, and Windows® 95/98.
PC97/98	-	PC97/98 Ready, PC99 Color Connector.
Power Management	-	Support SMM, APM and ACPI.
	-	Comply to Energy Star “Green PC” Program.
	-	Supports Modem Ring-in Wake Up.
PCI	-	PCI 2.1.
AGP	-	AGP 2.0 / 1.0.
VRM	-	On Board VRM 9.0.
Battery	-	On-board Lithium Battery.
Others	-	Alarm Wake-up.
	-	Bundle “PC-cillin” Anti Virus Software.
Board Size	-	228mm x 305mm, ATX Form Factor.

DMI COMPLY

Designed for Microsoft Windows NT Windows 98

yes NetWare Tested and Approved

CE

FC

Software Bundle

PC-cillin 6 AntiVirus

All brand names and trademarks mentioned are property of their respective owners. Specifications are subject to change without further notice.