


**Socket 478  
(Pentium 4)**

# ASKA<sup>®</sup> SST-5903ACD

## VIA<sup>®</sup> P4X266E DDR ATX MOTHERBOARD

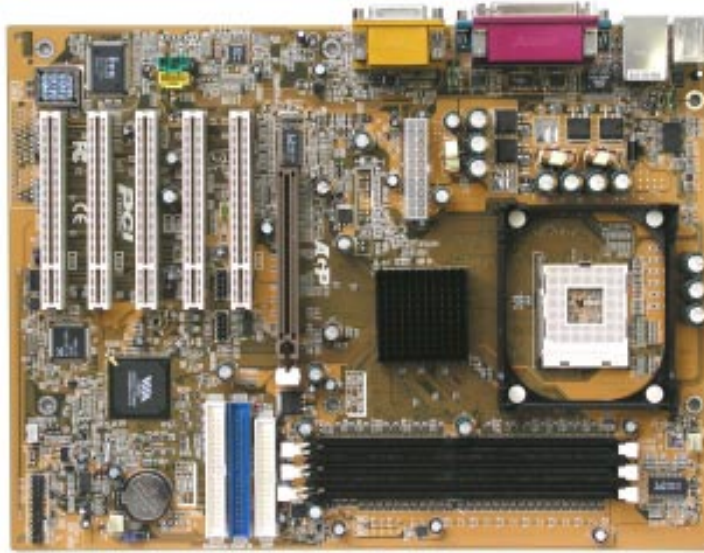

### SPECIFICATION : -

Processor	- Intel <sup>®</sup> Pentium <sup>®</sup> 4 (mPGA 478 Socket Type) (533MHz Front Side Bus).
Chip Set	- VIA <sup>®</sup> P4X266E + VT8235
BIOS	- Support PnP, APM, ACPI, ATAPI, DMI. - Trend Micro ChipAway Virus Protection.
Cache	- L2 Cache is CPU Built-in.
Memory	- Size up 1.5GB (DDR-PC2100). - Three DDR Sockets.
On Board I/O	- Support Two PCI Enhanced IDEs PIO Mode 3, Mode 4 and Ultra DMA 33/66/100/133 Channels. Twin Headers for Four IDE Devices Including IDE HDDs and CDROMs. - Support Two FDDs of 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB. - One ECP/EPP Parallel Port, Two 16550A UART Serial Ports, Six USB 2.0 Ports (Four USB Ports by Optional Adapter Cable), PS/2 Mouse Port, PS/2 Keyboard Port.
On Board Sound	- Integrated AC97 Controller with Standard AC97 Codec. - PnP, Full-Duplex, Sound Blaster and Direct Sound Ready. - Line-in, Line-out, Mic-in and MIDI/Game Port. - Optional 6 Channel Audio Codec Support
On Board Lan (Optional)	- 10/100 Mb/s Lan (RT8100B).
Expansion Slot	- Five PCI Bus Slots. - One Accelerated Graphics Port (AGP).
Plug and Play	- Plug and Play Specification 1.0A. - Plug and Play for DOS <sup>®</sup> , Windows <sup>®</sup> 3.x, and Windows <sup>®</sup> 95/98.
PC97/98	- PC97/98 Ready, PC99 Color Connector.
Power Management	- Support SMM, APM and ACPI. - Comply to Energy Star "Green PC" Program. - Supports Modem Ring-in Wake Up.
PCI	- PCI 2.1.
AGP	- AGP 2.0 / 1.0.
VRM	- On Board VRM 9.0.
Battery	- On-board Lithium Battery.
Others	- Alarm Wake-up. - Bundle "PC-cillin" Anti Virus Software.
Board Size	- 305mm x 228mm, ATX Form Factor.



**DMI COMPLY**



**Software Bundle**

