


Socket 370



SST-6800

INTEL 810 MICRO ATX MOTHERBOARD

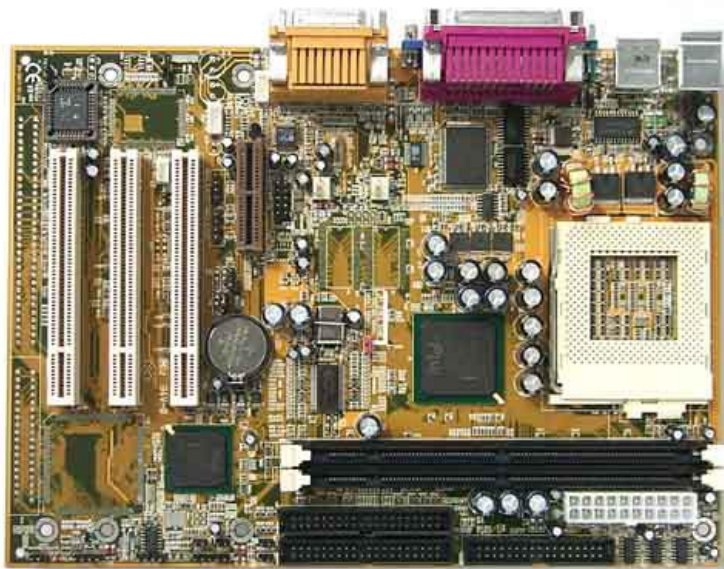

SPECIFICATION : -

| | |
|------------------------|--|
| Processor | <ul style="list-style-type: none">- Intel® Pentium® III & Celeron® (66/100Mhz Front Side Bus) (PGA 370 Type).- 300/333/350/366/400/433/450/466/500/533/550/600/650/667/700MHz or above. |
| Chip Set | <ul style="list-style-type: none">- Intel® 810 |
| BIOS | <ul style="list-style-type: none">- Intel® Firmware Hub (4M).- Support PnP, APM, ACPI, ATAPI, DMI.- IDE AUTO LBA Mode Supports HDDs over 8.4GB.- Trend Micro ChipAway Virus Protection. |
| Cache Memory | <ul style="list-style-type: none">- L2 Cache is CPU Built-in.- Size up to 512MB.- Two 168-pins DIMMs. |
| On Chip Graphic Engine | <ul style="list-style-type: none">- DIMMs Depth of 1MB, 2MB, 4MB, 8MB, 16MB and 32MB.- Integrated 64-bit 3D/2D Graphic Engines (Intel 752 Core)- Hardware Motion Compensation for S/W MPEG2 Decode (DVD).- Dynamic Video Memory Technology and Optional 4MB Display Cache.- Integrated 24-bit 230MHz RAMDAC.- Resolution up to 1600 x 1200- DirectX6 & OpenGL API Support- Win 95vxd, Win98/NT5 Mini Port Driver Support. |
| On Board I/O | <ul style="list-style-type: none">- Support Two PCI Enhanced IDEs PIO Mode 3, Mode 4 and Ultra DMA 33 Channels (Optional Ultra DMA 66 & Ultra DMA 66 Cable). Twin Headers for Four IDE Devices Including IDE HDDs and CDROMs.- Support Two FDDs of 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB.- One ECP/EPP Parallel Port, Two 16550A UART Serial Ports, Two USB Ports, PS/2 Mouse Port, PS/2 Keyboard Port. |
| On Board Sound | <ul style="list-style-type: none">- Integrated AC97 Controller with Standard AC97 Codec.- PnP, Full-Duplex, Sound Blaster and Direct Sound Ready.- Line-in, Line-out, Mic-in and MIDI/Game Port . |
| Expansion Slot | <ul style="list-style-type: none">- One ISA Bus Slots (One PCI Shared Slot) (Optional).- Three PCI Bus Slots (One ISA Shared Slot).- One Audio Modem Riser (AMR). |
| Plug and Play | <ul style="list-style-type: none">- Plug and Play Specification 1.1.- Plug and Play for DOS®, Windows® 3.x, and Windows® 95/98. |
| PC97/98 | <ul style="list-style-type: none">- PC97/98 Ready, PC99 Color Connector. |
| Power Management | <ul style="list-style-type: none">- Support SMM, APM and ACPI.- Comply to Energy Star "Green PC" Program.- Supports WAKE-ON-LAN (WOL).- Suspend to RAM (STR) (Optional).- PCI 2.1.. |
| PCI | <ul style="list-style-type: none">- On Board VRM 8.4. |
| VRM | <ul style="list-style-type: none">- On-board Lithium Battery. |
| Battery | <ul style="list-style-type: none">- CPU Speed Jumperless. |
| Others | <ul style="list-style-type: none">- Alarm Wake-up- Bundle "PC-cillin 6" Anti Virus Software |
| Board Size | <ul style="list-style-type: none">- 173mm x 244mm, Micro ATX Form Factor. |



DMI COMPLY



Software Bundle

