


Socket 370



SST-6820MP

INTEL 810E MICRO ATX MOTHERBOARD

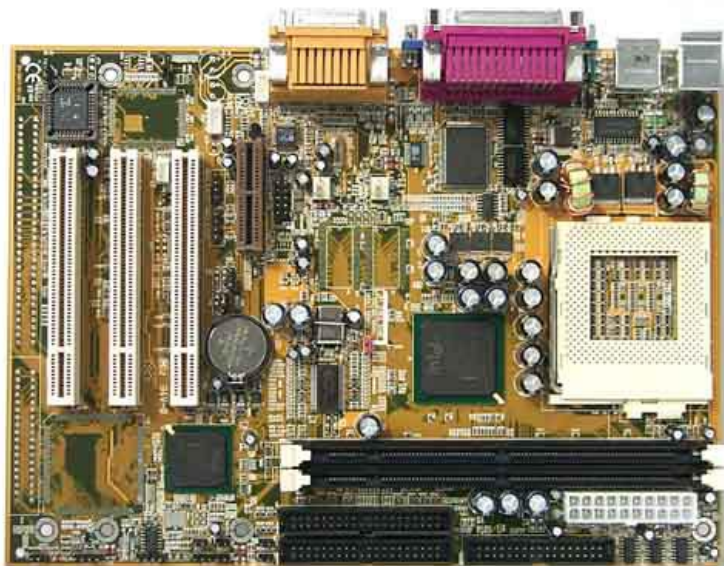

SPECIFICATION :-

Processor	<ul style="list-style-type: none">- Intel® Pentium® III & Celeron® (66/100/133Mhz Front Side Bus) (PGA 370 Type).- 300/333/350/366/400/433/450/466/500/533/550/600/650/667/700MHz or above.
Chip Set	<ul style="list-style-type: none">- Intel® 810E
BIOS	<ul style="list-style-type: none">- Intel® Firmware Hub (4M).- Support PnP, APM, ACPI, ATAPI, DMI.- IDE AUTO LBA Mode Supports HDDs over 8.4GB.- Trend Micro ChipAway Virus Protection.
Cache	<ul style="list-style-type: none">- L2 Cache is CPU Built-in.
Memory	<ul style="list-style-type: none">- Size up to 512MB.- Two 168-pins DIMMs.
On Chip Graphic Engine	<ul style="list-style-type: none">- DIMMs Depth of 1MB, 2MB, 4MB, 8MB, 16MB and 32MB.- Integrated 64-bit 3D/2D Graphic Engines (Intel 752 Core)- Hardware Motion Compensation for S/W MPEG2 Decode (DVD).- Dynamic Video Memory Technology and Optional 4MB Display Cache.- Integrated 24-bit 230MHz RAMDAC.- Resolution up to 1600 x 1200- DirectX6 & OpenGL API Support- 4MB Display Cache.
On Board I/O	<ul style="list-style-type: none">- Win 95vxd, Win98/NT5 Mini Port Driver Support.- Support Two PCI Enhanced IDEs PIO Mode 3, Mode 4 and Ultra DMA 33 Channels (Optional Ultra DMA 66 & Ultra DMA 66 Cable). Twin Headers for Four IDE Devices Including IDE HDDs and CDROMs.- Support Two FDDs of 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB.- One ECP/EPP Parallel Port, Two 16550A UART Serial Ports, Two USB Ports, PS/2 Mouse Port, PS/2 Keyboard Port.
On Board Sound	<ul style="list-style-type: none">- Integrated AC97 Controller with Standard AC97 Codec.- PnP, Full-Duplex, Sound Blaster and Direct Sound Ready.
Expansion Slot	<ul style="list-style-type: none">- Line-in, Line-out, Mic-in and MIDI/Game Port .- One ISA Bus Slots (One PCI Shared Slot) (Optional).- Three PCI Bus Slots (One ISA Shared Slot).
Plug and Play	<ul style="list-style-type: none">- One Audio Modem Riser (AMR).- Plug and Play Specification 1.1.
PC97/98	<ul style="list-style-type: none">- Plug and Play for DOS®, Windows® 3.x, and Windows® 95/98.
Power Management	<ul style="list-style-type: none">- PC97/98 Ready, PC99 Color Connector.- Support SMM, APM and ACPI.- Comply to Energy Star "Green PC" Program.- Supports WAKE-ON-LAN (WOL).- Suspend to RAM (STR) (Optional).
PCI	<ul style="list-style-type: none">- PCI 2.1..
VRM	<ul style="list-style-type: none">- On Board VRM 8.4.
Battery	<ul style="list-style-type: none">- On-board Lithium Battery.
Others	<ul style="list-style-type: none">- CPU Speed Jumperless.- Alarm Wake-up- Bundle "PC-cillin 6" Anti Virus Software
Board Size	<ul style="list-style-type: none">- 173mm x 244mm, Micro ATX Form Factor.



DMI COMPLY



Software Bundle

