


SOCKET 370

ASKA® SST-6821AP INTEL 815EP ATX MOTHERBOARD

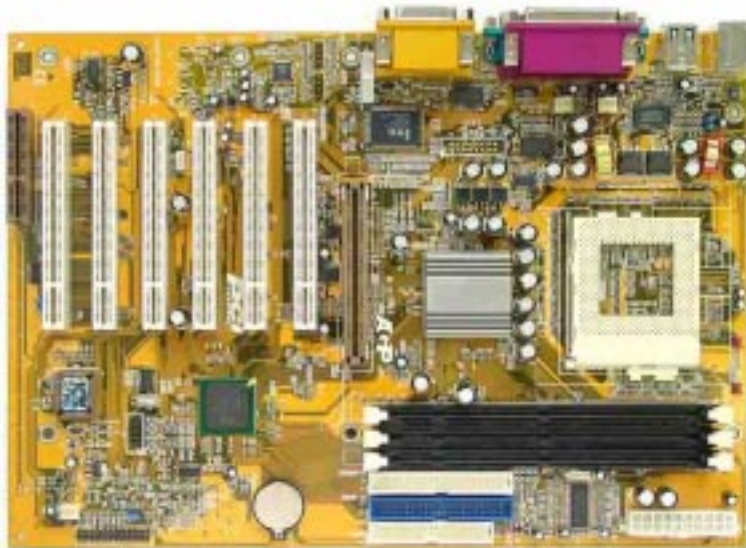

SPECIFICATION : -

Processor	- Intel® Pentium® III & Celeron® (66/100/133Mhz Front Side Bus) (PGA370 Type).
Chip Set	- Intel® 815EP.
BIOS	- Intel Firmware Hub (with Security Feature). - Support PnP, APM, ACPI, ATAPI, DMI. - IDE AUTO LBA Mode Supports HDDs over 8.4GB. - Trend Micro ChipAway Virus Protection.
Cache	- L2 Cache is CPU Built-in.
Memory	- Size up 512MB. - Three 168-pin DIMMS (64-bit).
On Board I/O	- Support Two PCI Enhanced IDEs PIO Mode 3, Mode 4 and Ultra DMA 33/66/100 Channels (Optional Ultra DMA 66/100 Cable). Twin Headers for Four IDE Devices Including IDE HDDs and CDROMs. - Support Two FDDs of 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB. - One ECP/EPP Parallel Port, Two 16550A UART Serial Ports, Four USB Ports, PS/2 Mouse Port, PS/2 Keyboard Port, Lan Port (optional), - Integrated AC97 Controller with Standard AC97 Codec. - PnP, Full-Duplex, Sound Blaster and Direct Sound Ready. - Line-in, Line-out, Mic-in and MIDI/Game Port .
On Board Sound	- One Accelerated Graphics Port (AGP). - One Communication and Networking Riser (CNR)
Expansion Slot	- Plug and Play Specification 1.1. - Plug and Play for DOS®, Windows® 3.x, and Windows® 95/98/2000.
Plug and Play	- PC97/98 Ready, PC99 Color Connector.
PC97/98	- Support SMM, APM and ACPI.
Power Management	- Comply to Energy Star "Green PC" Program. - Supports WAKE-ON-LAN (WOL). - Supports Modem Ring-in Wake Up.
PCI	- PCI 2.2.
AGP	- AGP 2.0 / 1.0.
VRM	- On Board VRM 8.4.
Battery	- On-board Lithium Battery.
Others	- CPU Speed Jumperless. - Alarm Wake-up. - Bundle "PC-cillin" Anti Virus Software.
Board Size	- Support Intel Type C Standard Heat Sink for 1G or above Pentium III CPU. - 21.4cm x 30.5cm, ATX Form Factor.



DMI COMPLY



Software Bundle

