


# Socket 478 (Pentium 4)

# ASKA® SST-6833AC INTEL® 845GL ATX MOTHERBOARD

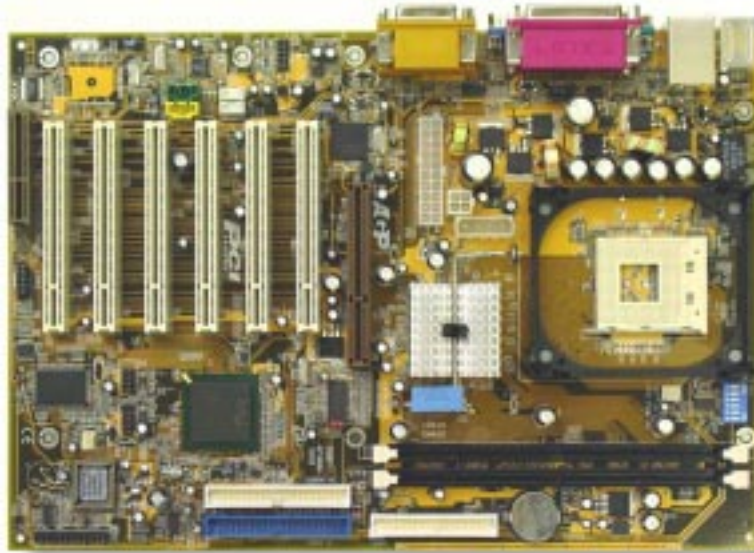

## SPECIFICATION : -

<p>Processor</p> <p>Chip Set</p> <p>BIOS</p>	<ul style="list-style-type: none"> <li>- Intel® Pentium® 4 (478pin package) (400MHz FSB).</li> <li>- Intel® 845GL + ICH4.</li> <li>- Firmware Hub.</li> <li>- Support PnP, APM, ACPI, ATAPI, DMI.</li> <li>- Trend Micro ChipAway Virus Protection.</li> </ul>
<p>Cache</p> <p>Memory</p> <p>On Board I/O</p>	<ul style="list-style-type: none"> <li>- L2 Cache is CPU Built-in.</li> <li>- Two DIMMS Sockets Supports up to 1GB (PC133).</li> <li>- Support Two PCI Enhanced IDEs PIO Mode 3, Mode 4 and Ultra DMA 33/66/100 Channels. Twin Headers for Four IDE Devices Including IDE HDDs and CDROMs.</li> <li>- Support Two FDDs of 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB.</li> <li>- One ECP/EPP Parallel Port, Two 16550A UART Serial Ports, Six USB 2.0 Ports (Four USB Ports by Optional Adapter Cable), PS/2 Mouse Port, PS/2 Keyboard Port,</li> </ul>
<p>On Chip Graphic Engine</p>	<ul style="list-style-type: none"> <li>- Integrated 128-bit 3D/2D Graphic Engines.</li> <li>- Max. 48MB Frame Buffer Shared with System Memory Via Dynamic Video Memory Technology (DVMT).</li> <li>- Hardware Motion Compensation for S/W MPEG2 Decode (DVD).</li> <li>- Integrated 24-bit 350MHz RAMDAC.</li> <li>- Resolution up to 2048 x 1536.</li> <li>- DirectX &amp; OpenGL API Support.</li> <li>- Dual Display / TV-Out/ DVI with ADD (AGP Digital Display) TV/DVI Card Plugged in AGP Slot.</li> </ul>
<p>On Board Sound</p>	<ul style="list-style-type: none"> <li>- Integrated AC97 Controller with Standard AC97 Codec.</li> <li>- PnP, Full-Duplex, Sound Blaster and Direct Sound Ready.</li> <li>- Line-in, Line-out, Mic-in and MIDI/Game Port .</li> </ul>
<p>Expansion Slot</p>	<ul style="list-style-type: none"> <li>- Six PCI Bus Slots.</li> <li>- One Communication and Networking Riser (CNR)</li> <li>- One Accelerated Graphics Port (AGP) (Support ADD Card only).</li> </ul>
<p>Plug and Play</p>	<ul style="list-style-type: none"> <li>- Plug and Play Specification 1.1.</li> <li>- Plug and Play for DOS®, Windows® 3.x, and Windows® 95/98/2000/XP.</li> </ul>
<p>PC97/98</p> <p>Power Management</p>	<ul style="list-style-type: none"> <li>- PC97/98 Ready, PC99 Color Connector.</li> <li>- Support SMM, APM and ACPI.</li> <li>- Comply to Energy Star "Green PC" Program.</li> <li>- Supports WAKE-ON-LAN (WOL).</li> <li>- Supports Modem Ring-in Wake Up.</li> </ul>
<p>AGP</p> <p>VRM</p> <p>Battery</p> <p>Others</p>	<ul style="list-style-type: none"> <li>- AGP 2.0 (1.5V only)</li> <li>- On Board VRM 9.0.</li> <li>- On-board Lithium Battery.</li> <li>- Alarm Wake-up.</li> <li>- Bundle "PC-cillin" Anti Virus Software.</li> </ul>
<p>Board Size</p>	<ul style="list-style-type: none"> <li>- ATX Form Factor.</li> </ul>



DMI COMPLY



### Software Bundle

