


AAEON TECHNOLOGY, INC.

SBC-350A

Configuration

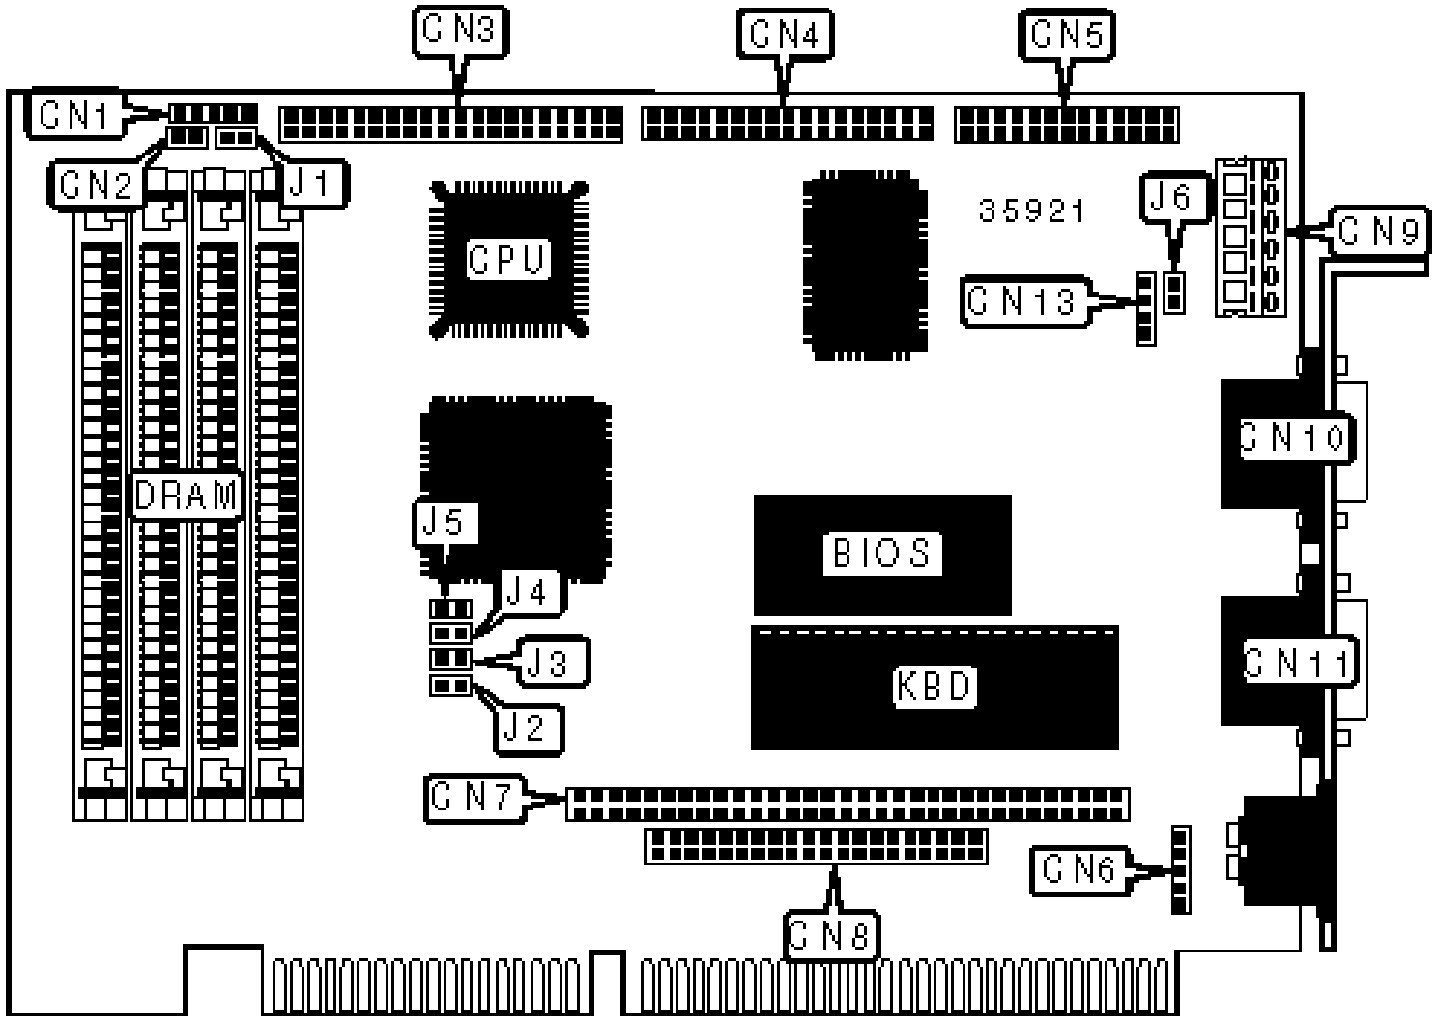

CONNECTIONS

Purpose	Location	Purpose	Location
Power LED & keylock	CN1	PC/104 connector	CN8
IDE interface LED	CN2	Power connector	CN9
IDE interface	CN3	Serial port 1	CN10
Floppy drive interface	CN4	Serial port 2	CN11
Parallel port	CN5	Speaker	CN13
Auxiliary keyboard connector	CN6	Reset switch	J1
PC/104 connector	CN7		

USER CONFIGURABLE SETTINGS

Function	Label	Position
» Monitor type select color	J6	Open
Monitor type select monochrome	J6	Closed

SIMM CONFIGURATION

Size	Bank 0	Bank 1
512KB	(2) 256K x 9	None
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	None
4MB	(2) 1M x 9	(2) 1M x 9
8MB	(2) 4M x 9	None
16MB	(2) 4M x 9	(2) 4M x 9

CPU SPEED SELECTION

Speed	J2	J3	J4	J5
-------	----	----	----	----

20MHz	Closed	Closed	Open	Closed
25MHz	Open	Closed	Closed	Open
33MHz	Closed	Open	Closed	Closed
40MHz	Open	Open	Open	Open