


SIEMENS NIXDORF  
SYSTEM BOARD D1031

Configuration

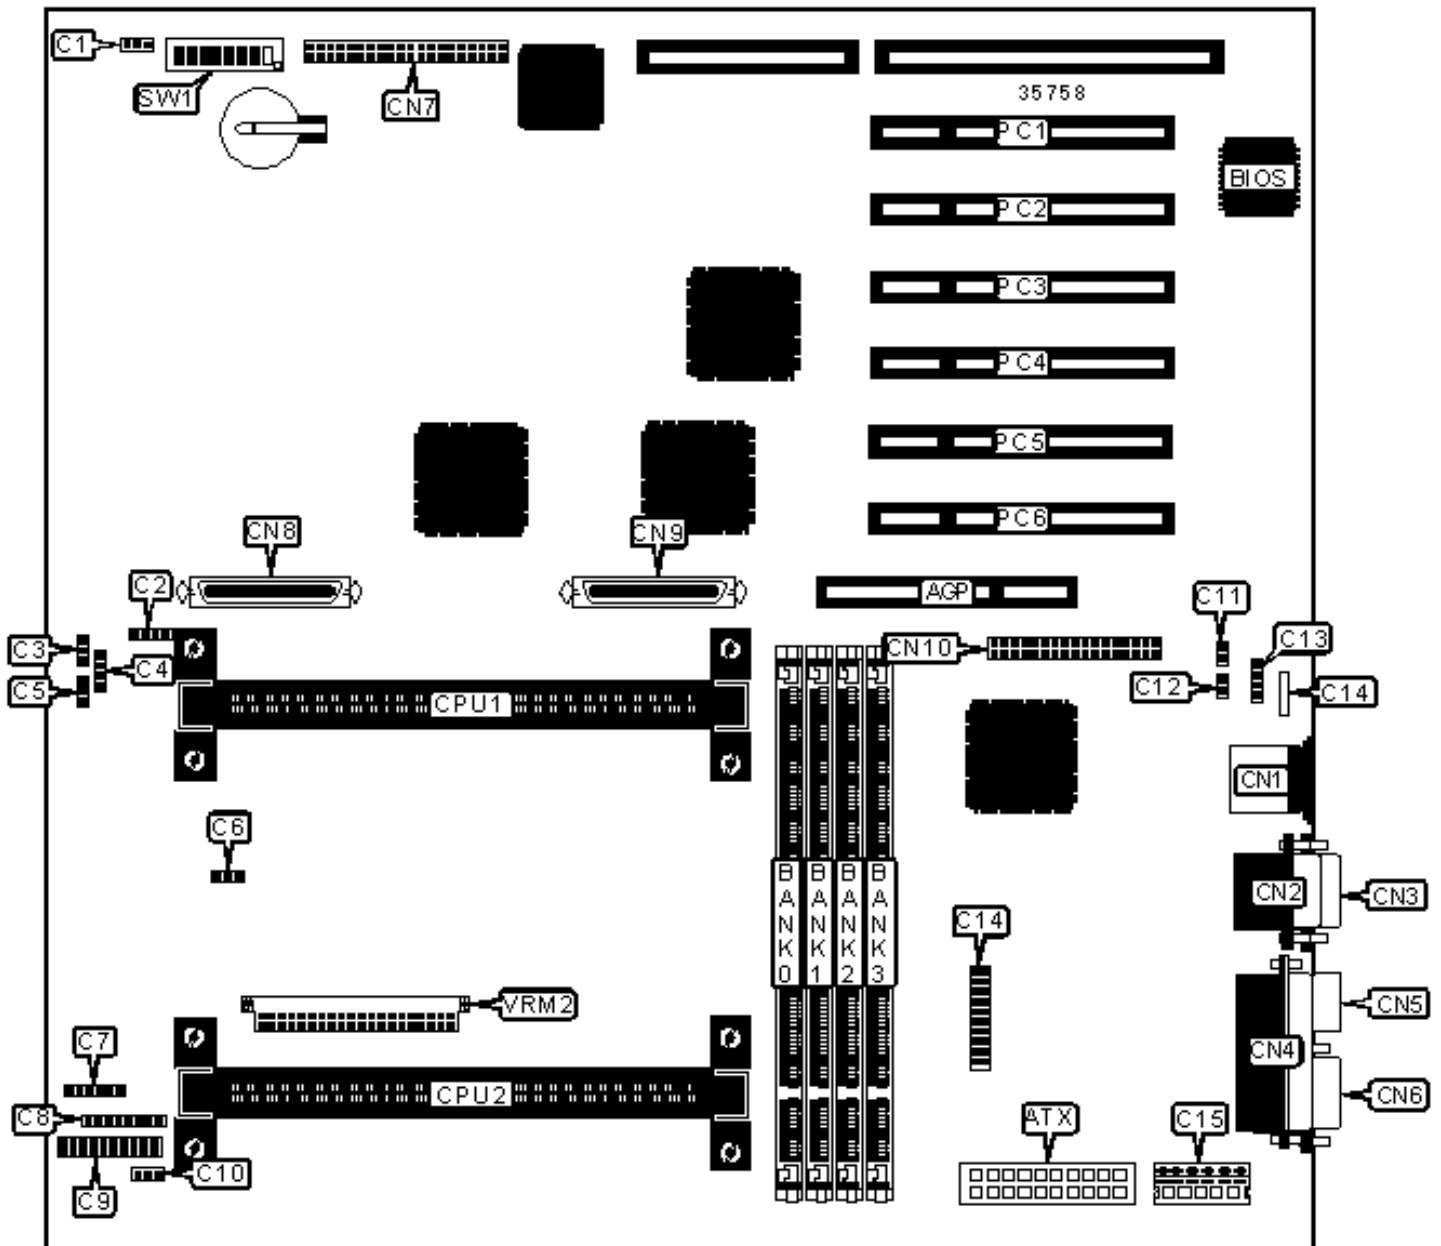

## CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	CAN bus external	C14
ATX power connector	ATX	3v power	C15
USB connector (internal)	C1	Chipcard reader connector	C16
SCSI interface LED	C2	PS/2 mouse port	CN1
Chassis fan power	C3	Serial port 1	CN2
Speaker	C4	Serial port 1	CN3
Chassis fan power	C5	Parallel port	CN4
Temperature sensor	C6	USB connector (external)	CN5
Power supply voltage	C7	VGA port	CN6
Cover detection connector	C8	IDE interface	CN7
Front panel connector	C9	Ultra SCSI interface	CN8
Temperature sensor	C10	Ultra-2 SCSI interface	CN9
Wake on LAN connector	C11	Floppy drive interface	CN10
Soft off power supply	C12	32-bit PCI slots	PC1 – PC4
CAN bus internal	C13	VRM connector	VRM2

## USER CONFIGURABLE SETTINGS

Function	Label	Position
» BIOS normal operation	SW1/1	Off
BIOS recovery mode	SW1/1	Off
» Factory configured - do not alter	SW1/2	Off
» Flash BIOS write protect disabled	SW1/3	Off
Flash BIOS write protect enabled	SW1/3	On
» Floppy drive write protect disabled	SW1/4	Off

	Floppy drive write protect enabled	SW1/4	On
--	------------------------------------	-------	----

<b>DIMM CONFIGURATION</b>				
Size	Bank 0	Bank 1	Bank 2	Bank 3
8MB	(1) 1M x 64	None	None	None
16MB	(1) 2M x 64	None	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None	None
24MB	(1) 2M x 64	(1) 1M x 64	None	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	None
32MB	(1) 4M x 64	None	None	None
32MB	(1) 2M x 64	(1) 2M x 64	None	None

<b>DIMM CONFIGURATION (CON'T)</b>				
Size	Bank 0	Bank 1	Bank 2	Bank 3
32MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
40MB	(1) 4M x 64	(1) 1M x 64	None	None
48MB	(1) 4M x 64	(1) 2M x 64	None	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	None
64MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 8M x 64	None	None	None
64MB	(1) 4M x 64	(1) 4M x 64	None	None
72MB	(1) 8M x 64	(1) 1M x 64	None	None
80MB	(1) 8M x 64	(1) 2M x 64	None	None
96MB	(1) 8M x 64	(1) 4M x 64	None	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	None
128MB	(1) 16M x 64	None	None	None

128MB	(1) 8M x 64	(1) 8M x 64	None	None
128MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
136MB	(1) 16M x 64	(1) 1M x 64	None	None
144MB	(1) 16M x 64	(1) 2M x 64	None	None
152MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None	None
176MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	None
224MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
256MB	(1) 32M x 64	None	None	None
256MB	(1) 16M x 64	(1) 16M x 64	None	None
256MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
272MB	(1) 16M x 64	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
280MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
288MB	(1) 16M x 64	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
304MB	(1) 32M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
320MB	(1) 16M x 64	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
320MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
352MB	(1) 32M x 64	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	None
448MB	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
512MB	(1) 64M x 64	None	None	None

### DIMM CONFIGURATION (CON'T)

Size	Bank 0	Bank 1	Bank 2	Bank 3
------	--------	--------	--------	--------

512MB	(1) 32M x 64	(1) 32M x 64	None	None
512MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
640MB	(1) 32M x 64	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64	None
1024MB	(1) 64M x 64	(1) 64M x 64	None	None
1024MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64
1536MB	(1) 64M x 64	(1) 64M x 64	(1) 64M x 64	None
2048MB	(1) 64M x 64	(1) 64M x 64	(1) 64M x 64	(1) 64M x 64
Note: Board accepts SDRAM memory.				

### CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium II CPU.

### VIDEO MEMORY JUMPER CONFIGURATION

Note: 2MB video memory is factory installed and is not configurable. The location is unidentified.

### CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	SW1/5	SW1/6	SW1/7	SW1/8
350MHz	100MHz	3.5x	On	Off	Off	On
400MHz	100MHz	4x	On	On	On	Off
450MHz	100MHz	4.5x	On	Off	On	Off