



CERTIFICATE

The TÜV CERT Certification Body
for QM Systems of RWTÜV Systems GmbH

hereby certifies in accordance with TÜV CERT
procedure that

**ELITEGROUP COMPUTER SYSTEMS CO., LTD.
ECS MANUFACTURING (SHENZHEN) CO., LTD.
ELITE TECHNOLOGY (SHENZHEN) CO., LTD.**

2F, No. 240, Sec. 1, Nei Hu Road, Taipei, Taiwan 114
No. 22, Alley 38, Lane 91, Sec. 1, Nei Hu Road, Taipei, Taiwan 114
No. 20 & No. 26, Free Trade Zone, Shatoujiao, Shenzhen City, Guangdong Province, China

has established and applies a quality system for

**Design, Manufacturing and Sales of Mainboards,
Personal Computers, Notebooks and Peripheral Cards**

An audit was performed, Report No. 2.5-1585/2000

Proof has been furnished that the requirements according to
ISO 9001 : 2000 / EN ISO 9001 : 2000 / JIS Q 9001 : 2000 / ANSI/ASQC Q9001 : 2000

are fulfilled. The certificate is valid until 27 January 2007

Certificate Registration No. 04100 2000 1325

The company has been certified since 2000



Essen, 04.03.2004




The TÜV CERT Certification Body for QM Systems
of RWTÜV Systems GmbH



ISO14001 CERTIFICATE

Certificate No.: 061-04-EI-0065-R1-L

We hereby certify that

ECS MANUFACTURING (SHANZHEN) CO., LTD.

by reason of its

Environmental Management System

has been awarded this certificate for
compliance with the standard

ISO14001:1996

The Environmental Management System

applies in the following area:

ECS MANUFACTURING (SHANZHEN) CO., LTD.

located at No. 20 & 26 (except 1F, 2F), Free Trade Zone,

Shatuojiang, Shenzhen City, Guangdong Province, P. R. China.

is engaged in manufacturing of Mother Board and Peripheral Card,
and interrelated managerial activities.

Date of issue: 28th Sept. 2004

Date of expiry: 27th Sept. 2007

Signed by:



SHENZHEN SOUTHERN CERTIFICATION CO., LTD.

This publication, including photographs, illustrations and software, is under the protection of international copyright laws, with all rights reserved. Neither this guide, nor any of the material contained herein, may be reproduced without the express written consent of the manufacturer.

The information in this document is subject to change without notice. The manufacturer makes no representations or warranties with respect to the contents hereof and specifically disclaims any implied warranties of merchantability or fitness for any particular purpose. Further, the manufacturer reserves the right to revise this publication and to make changes from time to time in the content hereof without obligation of the manufacturer to notify any person of such revision or changes.

Trademarks

IBM, VGA, and PS/2 are registered trademarks of International Business Machines.

AMD, Sempron, Athlon 64/Athlon 64 X2 Dual-core/Athlon 64 FX are registered trademarks of Advanced Micro Devices Inc.

Microsoft, MS-DOS and Windows 2000/XP are registered trademarks of Microsoft Corporation.

AMI is a registered trademark of American Megatrends Inc.

Other names used in this publication may be trademarks and are acknowledged.

Static Electricity Precautions

1. Don't take this motherboard and components out of their original static-proof package until you are ready to install them.
2. While installing, please wear a grounded wrist strap if possible. If you don't have a wrist strap, discharge static electricity by touching the bare metal of the system chassis.
3. Carefully hold this motherboard by its edges. Do not touch those components unless it is absolutely necessary. Put this motherboard on the top of static-protection package with component side facing up while installing.

Pre-Installation Inspection

1. Inspect this motherboard whether there are any damages to components and connectors on the board.
2. If you suspect this motherboard has been damaged, do not connect power to the system. Contact your motherboard vendor about those damages.

**Copyright © 2006
All Rights Reserved
A25G Series, V1.0
May 2006**

Table of Contents

Trademark i

Chapter 1: Introduction 1
Key Features 1
Package Contents 4

Chapter 2: Motherboard Installation 5
Motherboard Components 6
I/O Ports 7
Installing the Processor 7
Installing Memory Modules 8
Jumper Settings 10
Install the Motherboard 10
Connecting Optional Devices 12
Install Other Devices 14
Expansion Slots 16

Chapter 3: BIOS Setup Utility 18
Introduction 18
Running the Setup Utility 18
Standard CMOS Setup Page 19
Advanced Setup Page 20
Features Setup Page 21
Power Management Setup Page 23
PCI/Plug and Play Setup Page 24
BIOS Security Features Setup Page 25
CPU PnP Setup Page 25
Hardware Monitor Page 26
Load Best Performance Settings 27
Load Optimal Defaults 27
Save Changes and Exit 27
Discard Changes and Exit 27

Chapter 4: Software & Applications 28
Introduction 28
Installing Support Software 28
Bundled Software Installation 30

Notice:

1. Owing to Microsoft's certifying schedule is various to every supplier, we might have some drivers not certified yet by Microsoft. Therefore, it might happen under Windows XP that a dialogue box (shown as below) pops out warning you this software has not passed Windows Logo testing to verify its compatibility with Windows XP. Please rest assured that our RD department has already tested and verified these drivers. Just click the "Continue Anyway" button and go ahead the installation.



2. USB 2.0 Driver Limitations:
 - 2-1. The USB 2.0 driver only supports Windows XP and Windows 2000.
 - 2-2. If you connect a USB 2.0 hub to the root hub, plugging USB devices into this hub, the system might not successfully execute certain USB devices' connection because it could not recognize these devices.

Chapter 1 Introduction

This motherboard has a **Socket AM2** supporting the newest and advanced **AMD Sempron/Athlon 64/Athlon 64 X2 Dual-Core/Athlon 64 FX** with **HyperTransport Technology** processors, Front-Side Bus (FSB) speeds up to **1000 MHz**.

This motherboard integrates the **VIA K8M890 Northbridge** and **VT8237R Plus Southbridge** that supports the **Serial ATA** interface for high-performance and mainstream desktop PCs, and the built-in **USB 2.0** providing higher bandwidth. It implements **Universal Serial Bus Specification Revision 2.0** and is compliant with **UHCI 1.1** and **EHCI 1.0**.

It supports 6-channel **AC'97 Audio Codec** and provides one **IDE Ultra DMA 133/100/66** channel. It has two 32-bit **PCI** slots, one **PCI Express x16** slot, one **CNR** (Communications and Networking Riser) slot, and supports the onboard **10Base-T/100Base-TX Network** interface (optional). In addition, this motherboard has a full set of I/O ports including two PS/2 ports for mouse and keyboard, one serial port, one parallel port, one LAN port (optional), four back-panel **USB2.0** ports, and three audio jacks for microphone, line-in and line-out. Onboard USB header(s) can provide extra ports by connecting the Extended USB Module to the motherboard.

This motherboard is an **Micro ATX size** motherboard and has power connectors for an ATX power supply.

Key Features

The key features of this motherboard include:

Socket AM2 Processor Support

- Supports AMD **Sempron/Athlon 64/Athlon 64 X2 Dual-Core/Athlon 64 FX** processors
- Supports Front-Side Bus **1000 MHz**

Note: HyperTransport Technology is a point-to-point link between two devices, it enables integrated circuits to exchange information at much higher speeds than currently available interconnect technologies.

Chipset

There are **VIA K8M890 Northbridge** and **VT8237R Plus Southbridge** in this chipset in accordance with an innovative and scalable architecture with proven reliability and performance.

- Defines Highly Integrated Solutions for High End Server & Workstation & PC Designs -- High-performance Northbridge with HyperTransport interface to AMD Athlon 64 X2 Dual-Core/ Athlon 64/ Opteron/ Sempron CPU plus PCI Express to the external Graphics Controller, and with high-speed V-Link interface to the Southbridge

Motherboard User's Guide

- HyperTransport interface
- Advanced High Bandwidth PCI Express Interface -- Supports up to two PCI Express ports with 1.0a support
- High Bandwidth 1 GB/sec Ultra V-Link Host Controller -- Supports 66MHz, 8X/4X transfer modes, Ultra V-Link Host interface with total bandwidth of 1 GB/sec
- Advanced System Power Management Support -- ACPI 2.0 and PCI Bus Power Management 1.1 compliant
- PCI to system memory data streaming up to 132 Mbyte/sec (data sent to north bridge via high speed Ultra V-Link interface)
- PCI-2.2 compliant, 32-bit 3.3V PCI interface with 5V tolerant inputs
- Support six PCI slots of arbitration and decoding for all integrated functions and LPC bus.
- Dual Channel Serial ATA/RAID Controller—Complies with Serial ATA Specification Revision 1.0

Memory Support

- Two 240-pin DIMM sockets for DDR2 SDRAM dual channel memory modules
- Supports **DDR2 800/667/533/400** memory bus
- Maximum installed memory is 16 GB

Expansion Slots

- One CNR slot
- One PCI Express x16 slot
- Two 32-bit PCI slots

Onboard IDE channels

- Two IDE Connectors
- Supports PIO (Programmable Input/Output) and DMA (Direct Memory Access) modes
- Supports IDE Ultra DMA bus mastering with transfer rates of **133/100/66** MB/sec

Serial ATA

- Two Serial ATA Connectors
- Transfer rate exceeding best ATA (~1.5 Gb/s) with scalability to higher rates
- Low pin count for both host and devices

AC'97 Codec

- Compliant with AC'97 2.3 specification
- 16-bit Stereo full-duplex CODEC with independent and variable sampling rate
- Support for 3.3v digital, 5v analog power supply and low power consumption management

- Three analog line-level stereo inputs with 5-bit volume control: LINE_IN, CD, AUX
- Front-Out, Surround-Out, MIC-In and LINE-In Jack Sensing
- Two analog line-level mono input
- Standard 48-Pin LQFP

Onboard I/O Ports

- Two PS/2 ports for mouse and keyboard
- One serial port
- One parallel port
- One VGA port
- Four back-panel USB2.0 ports
- One LAN port (optional)
- Audio jacks for microphone, line-in and line-out

Fast Ethernet LAN (optional)

- Built-in **100Base-TX/10Base-T Physical Layer solution**
- Dual Speed – 100/10 Mbps
- MII Interface to Ethernet Controller and Configuration & Status
- Auto Negotiation: 10/100, Full/Half Duplex
- Meet All applicable IEEE 802.3/802.3u, 10Base-T and 100 Base-TX Standards

USB 2.0

- Compliant with Universal Serial Bus Specification Revision 2.0
- Compliant with Intel's Enhanced Host Controller Interface Specification Revision 1.0
- Compliant with Universal Host Controller Interface Specification Revision 1.1
- PCI multi-function device consists of two **UHCI Host Controller** cores for full-/low-speed signaling and one **EHCI Host Controller** core for high-speed signaling
- Root hub consists 4 downstream facing ports with integrated physical layer transceivers shared by **UHCI** and **EHCI** Host Controller, up to eight functional ports
- Support PCI-Bus Power Management Interface Specification release 1.1
- Legacy support for all downstream facing ports

BIOS Firmware

This motherboard uses AMI BIOS that enables users to configure many system features including the following:

- Power management
- Wake-up alarms
- CPU parameters and memory timing

Motherboard User's Guide

- CPU and memory timing

The firmware can also be used to set parameters for different processor clock speeds.

Dimensions

- Micro ATX form factor of 244 x 220 mm

Note: Hardware specifications and software items are subject to change without notification.

Package Contents

Your motherboard package ships with the following items:

- The motherboard
- The User's Guide
- One diskette drive ribbon cable (optional)
- One IDE drive ribbon cable
- The Software support CD

Optional Accessories

You can purchase the following optional accessories for this motherboard.

- The Extended USB module
- The CNR v.90 56K Fax/Modem card
- The Serial ATA cable
- The Serial ATA power cable

Note: You can purchase your own optional accessories from the third party, but please contact your local vendor on any issues of the specification and compatibility.

Chapter 2 Motherboard Installation


To install this motherboard in a system, please follow these instructions in this chapter:

- ❑ Identify the motherboard components
- ❑ Install a CPU
- ❑ Install one or more system memory modules
- ❑ Make sure all jumpers and switches are set correctly
- ❑ Install this motherboard in a system chassis (case)
- ❑ Connect any extension brackets or cables to headers/connectors on the motherboard
- ❑ Install peripheral devices and make the appropriate connections to headers/connectors on the motherboard

Note:

- 1 Before installing this motherboard, make sure jumper CLR_CMOS1 is under Normal setting. See this chapter for information about locating CLR_CMOS1 and the setting options.
- 2 Never connect power to the system during installation; otherwise, it may damage the motherboard.


Motherboard Components

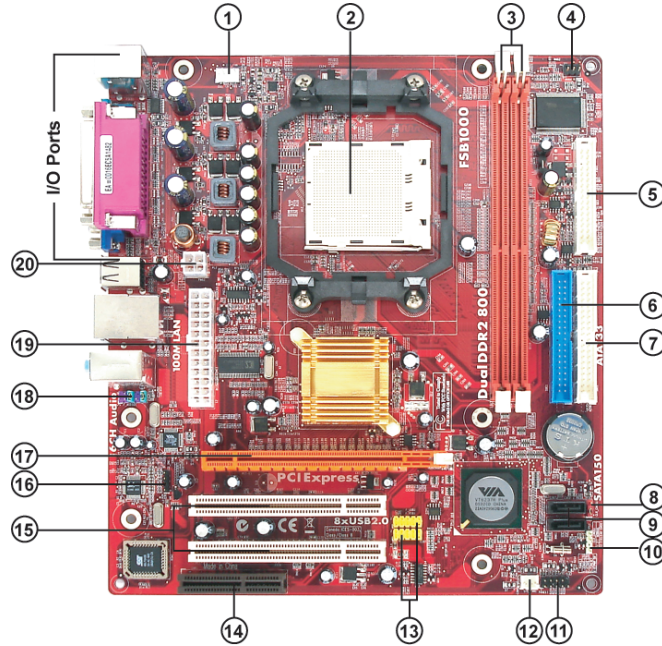

ITEM	LABEL	COMPONENTS
1	CPU_FAN	CPU Fan connector(4 PIN)
2	CPU Socket	Socket AM2 for AMD Sempron/Athlon 64/Athlon 64 X2 Dual-Core/Athlon 64 FX CPUs
3	DDR11~2	240-pin DDR2 SDRAM sockets
4	IR1	Infrared header
5	FDD1	Floppy Disk Drive connector
6	IDE1	Primary IDE connector
7	IDE2	Secondary IDE connector
8	CLR_CMOS1	Clear CMOS jumper
9	SATA 1/2	Serial ATA connectors
10	SPK1	Speaker header
11	PANEL 1	Front Panel Sw itch/LED header
12	SYS_FAN1	System Fan connector
13	F_USB1/2	Front Panel USB headers
14	CNR1	CNR slot
15	PCI-2	32-bit PCI slots
16	CD_IN1	Analog Audio Input header
17	PCI-E1	PCI Express x16 slot
18	F_AUDIO1	Front Panel Audio header
19	PWR1	Standard 24-Pin ATX Pow er connector
20	PWR2	Standard 4-Pin ATX Pow er connector

I/O Ports

The illustration below shows a side view of the built-in I/O ports on the motherboard.

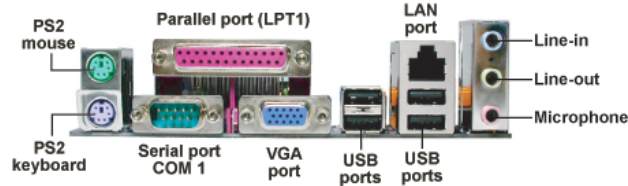


PS/2 Mouse	Use the upper PS/2 port to connect a PS/2 pointing device.
PS/2 Keyboard	Use the lower PS/2 port to connect a PS/2 keyboard.
Parallel Port (LPT1)	Use the Parallel port to connect printers or other parallel communications devices.
Serial Port (COM1)	Use the COM port to connect serial devices such as mice or fax/modems. COM1 is identified by the system as COM1.
VGA Port	Use the VGA port to connect VGA devices.
LAN Port (optional)	Connect an RJ-45 jack to the LAN port to connect your computer to the Network.
USB Ports	Use the USB ports to connect USB devices.
Audio Ports	Use these three audio jacks to connect audio devices. The first jack is for stereo Line-In signal, the second jack for stereo Line-Out signal, and the third jack for Microphone.

Installing the Processor


This motherboard has a socket AM2 processor socket. When choosing a processor, consider the performance requirements of the system. Performance is based on the processor design, the clock speed and system bus frequency of the processor, and the quantity of internal cache memory and external cache memory.

CPU Installation Procedure

Follow these instructions to install the CPU:

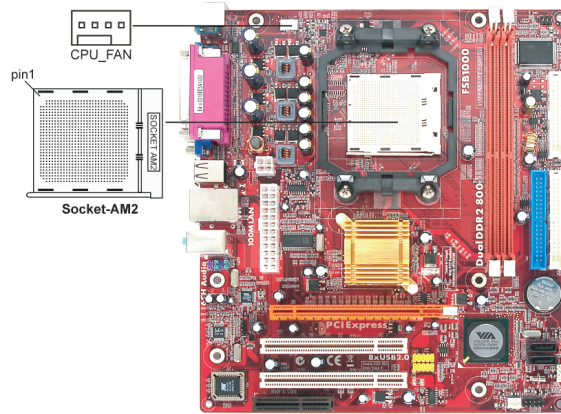

- 1 Unhook the locking lever of the CPU socket. Pull the locking lever away from the socket and raising it to the upright position.
- 2 Match the pin1 corner marked as the beveled edge on the CPU with the pin1 corner on the socket. Insert the CPU into the socket. Do not use force.
- 3 Push the locking lever down and hook it under the latch on the edge of socket.
- 4 Apply thermal grease to the top of the CPU.
- 5 Install the cooling fan/heatsink unit onto the CPU, and secure them all onto the socket base.
- 6 Plug the CPU fan power cable into the CPU fan connector (CPU_FAN) on the motherboard.




Note: To achieve better airflow rates and heat dissipation, we suggest that you use a high quality fan with 4800 rpm at least. CPU fan and heatsink installation procedures may vary with the type of CPU fan/heatsink supplied. The form and size of fan/heatsink may also vary.

Installing Memory Modules

This motherboard accommodates two 240-pin DIMM sockets (Dual Inline Memory Module) for unbuffered **DDR2 800/667/533/400** memory modules (Double Data Rate SDRAM), and maximum 16 GB installed memory.

Chapter 2: Motherboard Installation


Over its predecessor, DDR-SDRAM, DDR2-SDRAM offers greater bandwidth and density in a smaller package along with a reduction in power consumption. In addition, DDR2-SDRAM offers new features and functions that enable a higher clock rate and data rate operations of 400 MHz, 533 MHz 667 MHz and 800 MHz. DDR2 transfers 64 bits of data twice every clock cycle.

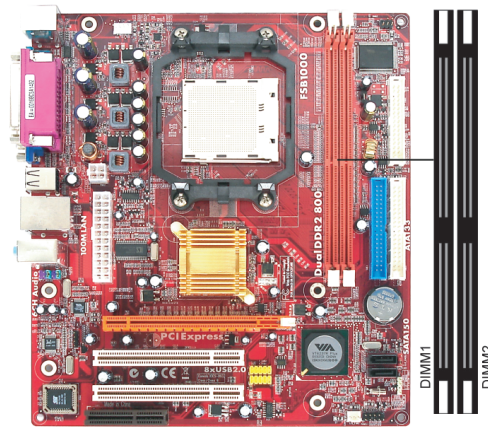

Memory Module Installation Procedure

These modules can be installed with up to 16 GB system memory. Refer to the following to install the memory module.

1. Push down the latches on both sides of the DIMM socket.
2. Align the memory module with the socket. There is a notch on the DIMM socket that you can install the DIMM module in the correct direction. Match the cutout on the DIMM module with the notch on the DIMM socket.
3. Install the DIMM module into the socket and press it firmly down until it is seated correctly. The socket latches are levered upwards and latch on to the edges of the DIMM.
4. Install any remaining DIMM modules.

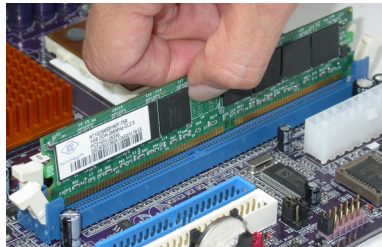


Motherboard User's Guide

Note for dual-channel DDR2:

1. You CAN NOT use only one DIMM2 for it might cause the system shutdown.
2. You need to use DIMM1 and DIMM2 with the same size of memory modules.

Jumper Settings

Connecting two pins with a jumper cap is SHORT; removing a jumper cap from these pins, OPEN.

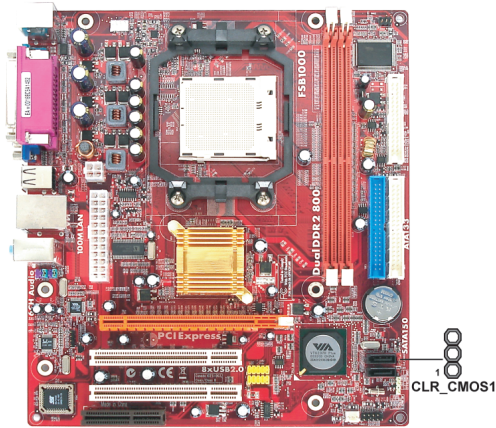

CLR_CMOS1: Clear CMOS Jumper

Use this jumper to clear the contents of the CMOS memory. You may need to clear the CMOS memory if the settings in the Setup Utility are incorrect and prevent your motherboard from operating. To clear the CMOS memory, disconnect all the power cables from the motherboard and then move the jumper cap into the CLEAR setting for a few seconds.


Function	Jumper
Normal	Short Pins 1-2
Clear CMOS	Short Pins 2-3

Note: To avoid the system instability after clearing CMOS, we recommend users to enter the main BIOS setting page to "Load Optimal De-faults" and then "Save Changes and Exit".

Install The Motherboard

Install the motherboard in a system chassis (case). The board is a Micro ATX size motherboard. You can install this motherboard in an ATX case. Make sure your case has an I/O cover plate matching the ports on this motherboard.

Install the motherboard in a case. Follow the case manufacturer’s instructions to use the hardware and internal mounting points on the chassis.

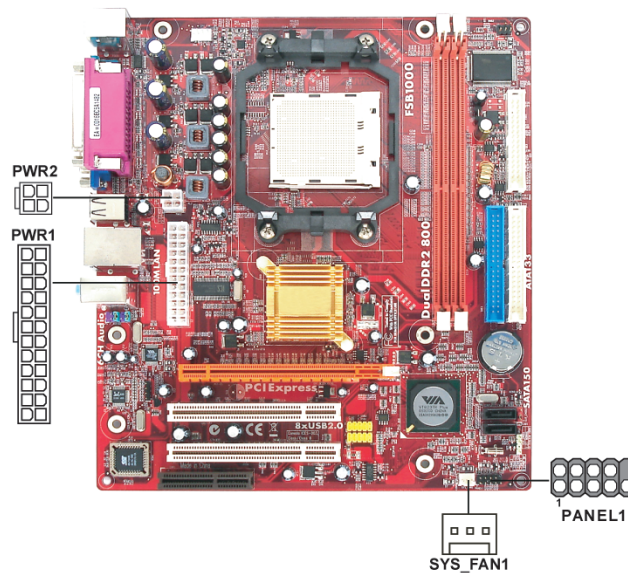

Connect the power connector from the power supply to the **PWR1** connector on the motherboard. **PWR2** is a +12V connector for CPU Vcore power.


If there is a cooling fan installed in the system chassis, connect the cable from the cooling fan to the **SYS_FAN1** fan power connector on the motherboard.

Connect the case switches and indicator LEDs to the **PANEL1** header.

Pin	Signal	Pin	Signal
1	HD_LED_P(+)	2	FP PWR/SLP(+)
3	HD_LED_N(-)	4	FP PWR/SLP(-)
5	RESET_SW_N(-)	6	POWER_SW_P(+)
7	RESET_SW_P(+)	8	POWER_SW_N(-)
9	RSVD_DNU	10	KEY

Connecting Optional Devices

Refer to the following for information on connecting the motherboard's optional devices:

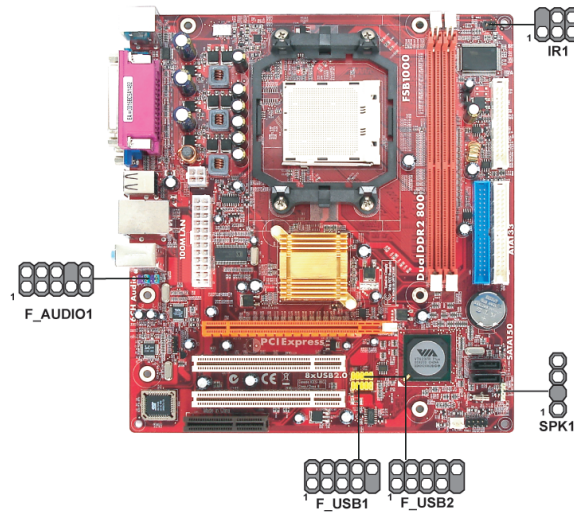

SPK1: Speaker Header

Connect the cable from the PC speaker to the SPK1 header on the motherboard.

Pin	Signal
1	+5V
2	NC
3	GND
4	SPKR

F_AUDIO1: Front Panel Audio Header

This header allows the user to install auxiliary front-oriented microphone and line-out ports for easier access.

Pin	Signal	Pin	Signal
1	AUD_MIC	2	AUD_GND
3	AUD_MIC_BIAS	4	AUD_VCC
5	AUD_FPOUT_R	6	AUD_RET_R
7	HP_ON	8	KEY
9	AUD_FPOUT_L	10	AUD_RET_L

F_USB1~2: Front Panel USB Headers

The motherboard has USB ports installed on the rear edge I/O port array. Additionally, some computer cases have USB ports at the front of the case. If you have this kind of case, use auxiliary USB headers F_USB1~2 to connect the front-mounted ports to the motherboard.

Here is a list of USB pin assignments.

Pin	Signal	Pin	Signal
1	VERG_FP_USBPWR0	2	VERG_FP_USBPWR0
3	USB_FP_P0(-)	4	USB_FP_P1(-)
5	USB_FP_P0(+)	6	USB_FP_P1(+)
7	GROUND	8	GROUND
9	KEY	10	GROUND

1. Locate the F_USB1~2 headers on the motherboard.
2. Plug the bracket cable onto the F_USB1~2 headers.
3. Remove a slot cover from one of the expansion slots on the system chassis.
Install an extension bracket in the opening. Secure the extension bracket to the chassis with a screw.

IR1: Infrared Port Header


The infrared port allows the wireless exchange of information between your computer and similarly equipped devices such as printers, laptops, Personal Digital Assistants (PDAs), and other computers.

Pin	Signal	Pin	Signal
1	NC	2	KEY
3	+5V	4	GND
5	IRTX	6	IRRX

1. Locate the infrared port-**IR1** header on the motherboard.
2. If you are adding an infrared port, connect the ribbon cable from the port to the IR1 header and then secure the port to an appropriate place in your system chassis.

Install Other Devices

Install and connect any other devices in the system following the steps below.

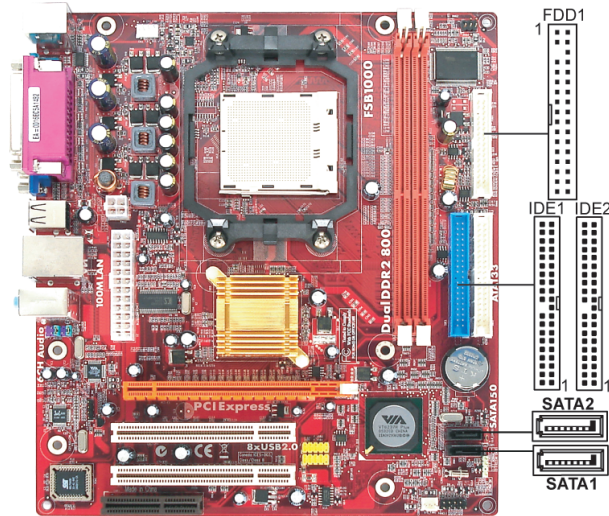

Floppy Disk Drive

The motherboard ships with a floppy disk drive cable that can support one or two drives. Drives can be 3.5" or 5.25" wide, with capacities of 360K, 720K, 1.2MB, 1.44MB, or 2.88MB.

Install your drives and connect power from the system power supply. Use the cable provided to connect the drives to the floppy disk drive connector **FDD1**.

IDE Devices

IDE devices include hard disk drives, high-density diskette drives, and CD-ROM or DVD-ROM drives, among others.

The mainboard ships with an IDE cable that can support one or two IDE devices. If you connect two devices to a single cable, you must configure one of the drives as Master and one of the drives as Slave. The documentation of the IDE device will tell you how to configure the device as a Master or Slave device. The Master device connects to the end of the cable.

Install the device(s) and connect power from the system power supply. Use the cable provided to connect the device(s) to the Primary IDE channel connector **IDE1** on the motherboard.

Chapter 2: Motherboard Installation

If you want to install more IDE devices, you can purchase a second IDE cable and connect one or two devices to the Secondary IDE channel connector **IDE2** on the motherboard. If you have two devices on the cable, one must be Master and one must be Slave.

Serial ATA Devices


The **Serial ATA (Advanced Technology Attachment)** is the standard interface for the IDE hard drives, which is designed to overcome the design limitations while enabling the storage interface to scale with the growing media rate demands of PC platforms. It provides you a faster transfer rate of **1.5 Gb/s**. If you have installed a Serial ATA hard drive, you can connect the Serial ATA cables to the Serial ATA hard drive or the connector on the motherboard.

On the motherboard, locate the Serial ATA connectors **SATA1-2**, which support new Serial ATA devices for the highest data transfer rates, simpler disk drive cabling and easier PC assembly.

It eliminates limitations of the current Parallel ATA interface, but maintains register compatibility and software compatibility with Parallel ATA.

Analog Audio Input Header

If you have installed a CD-ROM drive or DVD-ROM drive, you can connect the drive audio cable to the onboard sound system.

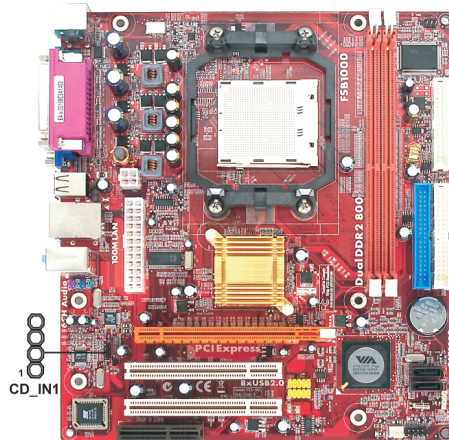

When you first start up your system, the BIOS should automatically detect your CD-ROM/DVD drive. If it doesn't, enter the Setup Utility and configure the CD-ROM/DVD drive that you have installed. On the motherboard, locate the 4-pin header **CD_IN1**.


Motherboard User's Guide

Here is a list of CD_IN1 pin assignments.

Pin	Signal
1	CD IN L
2	GND
3	GND
4	CD IN R

Expansion Slots


This motherboard has one PCI Express, one CNR and two 32-bit PCI slots.

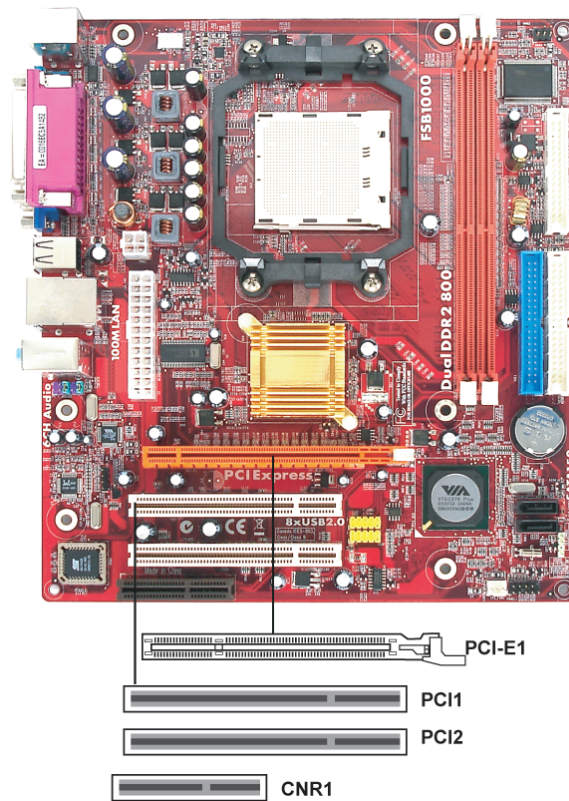

Chapter 2: Motherboard Installation

Follow the steps below to install an PCI Express/CNR/PCI expansion card.

1. Locate the PCI Express, CNR or PCI slots on the mainboard.
2. Remove the blanking plate of the slot from the system chassis.
3. Install the edge connector of the expansion card into the slot. Ensure the edge connector is correctly seated in the slot.
4. Secure the metal bracket of the card to the system chassis with a screw.



PCI Express Slot

You can install an external PCI Express graphics card that is fully compliant to the PCI Express Base Specification revision 1.0a.

CNR Slot

You can install the CNR (Communications and Networking Riser) cards in this slot, including LAN, Modem, and Audio functions.

PCI Slots

You can install the 32-bit PCI interface expansion cards in the slots.

Chapter 3 BIOS Setup Utility

Introduction


The BIOS Setup Utility records settings and information of your computer, such as date and time, the type of hardware installed, and various configuration settings. Your computer applies the information to initialize all the components when booting up and basic functions of coordination between system components.

If the Setup Utility configuration is incorrect, it may cause the system to malfunction. It can even stop your computer booting properly. If it happens, you can use the clear CMOS jumper to clear the CMOS memory which has stored the configuration information; or you can hold down the **Page Up** key while rebooting your computer. Holding down the **Page Up** key also clears the setup information.

You can run the setup utility and manually change the configuration. You might need to do this to configure some hardware installed in or connected to the motherboard, such as the CPU, system memory, disk drives, etc.

Running the Setup Utility

Every time you start your computer, a message appears on the screen before the operating system loading that prompts you to “Hit if you want to run SETUP”. Whenever you see this message, press the **Delete** key, and the Main menu page of the Setup Utility appears on your monitor.

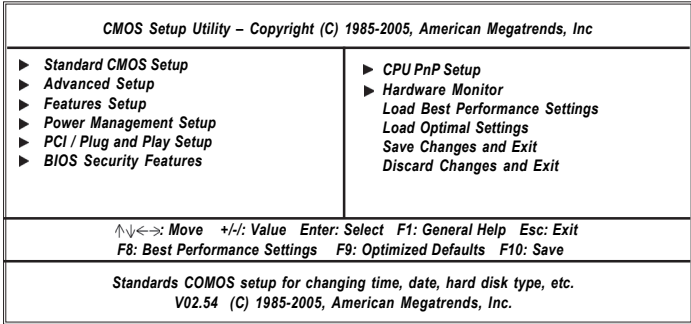

You can use cursor arrow keys to highlight anyone of options on the main menu page. Press **Enter** to select the highlighted option. Press the **Escape** key to leave the setup utility. Press **+/-** to modify the selected field's values.

Some options on the main menu page lead to tables of items with installed values that you can use cursor arrow keys to highlight one item, and press **PgUp** and **PgDn** keys to cycle through alternative values of that item. The other options on the main menu page lead to dialog boxes requiring your answer OK or Cancel by selecting the **[OK]** or **[Cancel]** key.

If you have already changed the setup utility, press **F10** to save those changes and exit the utility. Press **F1** to display a screen describing all key functions. Press **F8** to load best performance settings. Press **F9** to load optimal settings.

Standard CMOS Setup Page

This page displays a table of items defining basic information of your system.

CMOS Setup Utility – Copyright (C) 1985-2005, American Megatrends, Inc. Standard CMOS Setup		
System Time	00:004:12	Help Item
System Date	Mon 04/05/2004	
▶ Primary IDE Master	Hard Disk	User [Enter], [TAB] or [SHIFT-TAB] to select a field. Use [+] or [-] to configure system Time.
▶ Primary IDE Slave	Not Detected	
▶ Secondary IDE Master	Not Detected	
▶ Secondary IDE Slave	CD/DVD ROM	
▶ SATA1	Not Detected	
▶ SATA2	Not Detected	
Floppy A	1.44 MB 3 1/2	
Floppy B	Disabled	
↑↓←→ Move +/-: Value Enter: Select F1: General Help Esc: Exit F8: Best Performance Settings F9: Optimized Defaults F10: Save		

System Date & System Time

These items set up system date and time.

IDE Primary Master/Primary Slave/Secondary Master/Secondary Slave

Use these items to configure devices connected to the Primary/Secondary IDE channels. To configure an IDE hard disk drive, choose *Auto*. If the *Auto* setting fails to find a hard disk drive, set it to *User*, and then fill in the hard disk characteristics (Size, Cyls, etc.) manually. If you have a CD-ROM drive, select the setting *CDROM*. If you have an ATAPI device with removable media (e.g. a ZIP drive or an LS-120), select *Floptical*.

SATA1/2

These items display the status of auto detection of saa devices when “Onboard SATA-IDE” sets to “IDE”.

Floppy A/B

These items set up size and capacity of the floppy diskette drive(s) installed in the system.

Advanced Setup Page

This page sets up more advanced information about your system. Handle this page with caution. Any changes can affect the operation of your computer.

CMOS Setup Utility – Copyright (C) 1985-2005, American Megatrends, Inc. Advanced Setup		
		Help Item
Quick Boot	Enabled	Allows BIOS to skip certain tests while booting. This will decrease the time needed to boot the system.
1st Boot Device	HDD:PM-ST3120023AS	
2nd Boot Device	CD/DVD:3S-CD-ROM 52	
3rd Boot Device	1ST FLOPPY DRIVE	
Try Other Boot Device	Yes	
Bootup Num-Lock	On	
Boot to OS/2 > 64MB	No	
Aperture Size Select	64 MB	
MCT Timing Mode	Auto	
Auto Detect DIMM/PCI C1K	Enabled	
Spread Spectrum	Disabled	
(K8/NPT) to (AGP) Freq Auto	Auto	
(K8/NPT) to (AGP) Frequency	1000 MHz	
↑↓←→: Move +/-: Value Enter: Select F1: General Help Esc: Exit F8: Best Performance Settings F9: Optimized Defaults F10: Save		

Quick Boot

If you enable this item, the system starts up more quickly by elimination some of the power on test routines.

1st Boot Device/2nd Boot Device/3rd Boot Device

Use these items to determine the device order the computer uses to look for an operating system to load at start-up time.

Try Other Boot Device

If you enable this item, the system will also search for other boot devices if it fails to find an operating system from the first two locations.

BootUp Num-Lock

This item determines if the Num Lock key is active or inactive at system start-up time.

Boot to OS/2 > 64MB

Enable this item if you are booting the OS/2 operating system and you have more than 64MB of system memory installed.

Aperture Size Select

This item defines the size of aperture if you use a graphic adapter.

MCT Timing Mode

This item determines the MCT Timing Mode.

Auto detect DIMM/PCI Clock

When this item is enabled, BIOS will disable the clock signal of free DIMM/PCI slots.

Spread Spectrum

If you enable spread spectrum, it can significantly reduce the EMI (Electro-Magnetic interface) generated by the system.

(K8/NPT) to (AGP) Freq Auto

Use this item to be a switch of the Auto Detect LDT Frequency function.

(K8/NPT) to (AGP) Frequency

This item is an indicator of tunnel A Side link frequencies 200,400,600,800,1000 MHz, which is for the tunnel between CPU and Northbridge related to HyperTransport Technology.

Features Setup Page

This page sets up some parameters for peripheral devices connected to the system.

CMOS Setup Utility – Copyright (C) 1985-2005, American Megatrends, Inc.		
Features Setup		
OnBoard Floppy Controller	Enabled	Help Item Allows BIOS to Enable or Disable Floppy Controller.
Serial Port1 Address	3F8/IRQ4	
OnBoard IR Port	Disabled	
Parallel Port Address	378	
Parallel Port Mode	ECP & EPP	
ECP Mode DMA Channel	DMA3	
Parallel Port IRQ	IRQ7	
OnBoard PCI IDE Controller	Both	
OnBoard SATA-IDE	Enabled	
Audio Device	Enabled	
Modem Device	Auto	
Ethernet Device	Enabled	
OnBoard LAN Boot ROM	Disabled	
OnBoard USB Function	Enabled	
USB Function For DOS	Disabled	
↑↓←→: Move +/-: Value Enter: Select F1: General Help Esc: Exit F8: Best Performance Settings F9: Optimized Defaults F10: Save		

OnBoard Floppy Controller

Use this item to enable or disable the onboard floppy disk drive interface.

Serial Port1 Address

Use this item to enable or disable the onboard COM1/2 serial port, and to assign a port address.

OnBoard IR Port

Use this item to enable or disable the onboard infrared port, and to assign a port address.

Parallel Port Address

Use this item to enable or disable the onboard Parallel port, and to assign a port address.

Parallel Port Mode

Use this item to set the parallel port mode. You can select ECP (Extended Capabilities Port) & EPP (Enhanced Parallel Port).

ECP Mode DMA Channel

This item assigns a DMA channel to the parallel port.

Parallel Port IRQ

Use this item to assign IRQ to the parallel port.

OnBoard PCI IDE Controller

Use this item to enable or disable both of the onboard Primary and Secondary IDE channels.

OnBoard SATA-IDE

Use this item to enable the onboard SATA-IDE channel.

Audio Device

This item enables or disables the AC'97 audio chip.

Modem Device

This item enables or disables the onboard Modem.

Ethernet Device

This item enables or disables the onboard Ethernet LAN.

OnBoard LAN Boot ROM

Enable this item if you want to execute the Boot ROM function of onboard LAN while starting the system.

OnBoard USB Function

Enable this item if you plan to use the USB ports on this motherboard.

USB Function For DOS

Enable this item if you plan to use the USB ports on this motherboard in a DOS environment.

Power Management Setup Page

This page sets some parameters for system power management operation.

CMOS Setup Utility – Copyright (C) 1985-2005, American Megatrends, Inc. Power Management Setup		
ACPI Aware O/S	Yes	<i>Help Item</i>
ACPI Enhanced Efficiency	Disabled	
Power Management	Enabled	Yes / No ACPI support for Operating System.
Suspend Time Out	Disabled	Yes: If OS supports ACPI.
Resume On RTC Alarm	Disabled	No: If OS does not support ACPI.
LAN/Ring Power On	Disabled	
Keyboard Power On	Disabled	
<i>Wake-Up key</i>	<i>Any key</i>	
↑↓←→: Move +/-: Value Enter: Select F1: General Help Esc: Exit F8: Best Performance Settings F9: Optimized Defaults F10: Save		

ACPI Aware O/S

This item supports ACPI (Advanced Configuration and Power management Interface). Use this item to enable or disable the ACPI feature.

ACPI Enhanced Efficiency

It supports ACPI (Advanced Configuration and Power Management Interface). Use this item to enable or disable the ACPI feature.

Power Management

Use this item to enable or disable a power management scheme. If you enable power management, you can use the items below to set the power management operation. Both APM and ACPI are supported.

Suspend Time Out

This sets the timeout for Suspend mode in minutes. If the time selected passes without any system activity, the computer will enter power-saving Suspend mode.

Resume On RTC Alarm / RTC Alarm Date (Days) / System Time

The system can be turned off with a software command. If you enable this item, the system can automatically resume at a fixed time based on the system's RTC (realtime clock). Use the items below this one to set the date and time of the wake-up alarm. You must use an ATX power supply in order to use this feature.

LAN/Ring Power On

The system can be turned off with a software command. If you enable this item, the system can automatically resume if there is an incoming call on the Modem/Ring, or traffic on the network adapter. You must use an ATX power supply in order to use this feature.

Keyboard Power On

If you enable this item, system can automatically resume by pressing any and power keys on the keyboard or typing in the password. You must use an ATX power supply in order to use this feature.

Wake-Up Key

When Keyboard Power On is set to “Wake-Up Key”, this item is available and users can press any keys on the keyboard.

PCI / Plug and Play Setup Page

This page sets up some parameters for devices installed on the PCI bus and those utilizing the system plug and play capability.

CMOS Setup Utility – Copyright (C) 1985-2005, American Megatrends, Inc. PCI / Plug and Play Setup		
Share Memory Size	64MB	Help Item
Primary Graphics Adapter	PCI-E VGA	
Allocate IRQ to PCI VGA	Yes	Options
PCI IDE BusMaster	Enabled	PCI AGP
↑↓←→: Move +/-: Value Enter: Select F1: General Help Esc: Exit F8: Best Performance Settings F9: Optimized Defaults F10: Save		

Share Memory Size

This item lets you allocate a portion of the main memory for the onboard VGA display application with these options of 64MB, 128MB, 256 MB.

Primary Graphics Adapter

This item indicates if the primary graphics adapter uses the PCI or the AGP bus. The default AGP setting still lets the onboard display work and allows the use of a second display card installed in a PCI slot.

Allocate IRQ to PCI VGA

If this item is enabled, an IRQ will be assigned to the PCI VGA graphics system. You set this value to No to free up an IRQ.

PCI IDE BusMaster

This item enables or disables the DMA under DOS mode. We recommend you to leave this item at the default value.

BIOS Security Features Setup Page

This page helps you install or change a password.

CMOS Setup Utility – Copyright (C) 1985-2005, American Megatrends, Inc. BIOS Security Features	
Security Settings	Help Item
Supervisor Password : <i>Not Installed</i> Change Supervisor Password Press Enter	Install or Change the password.
↑↓←→: Move +/-: Value Enter: Select F1: General Help Esc: Exit F8: Best Performance Settings F9: Optimized Defaults F10: Save	

Supervisor Password

This item indicates whether a supervisor password has been set. If the password has been installed, *Installed* displays. If not, *Not Installed* displays.

Change Supervisor Password

You can select this option and press <Enter> to access the sub menu. You can use the sub menu to change the supervisor password.

CPU PnP Setup Page

This page helps you manually configure the mainboard for the CPU. The system will automatically detect the type of installed CPU and make the appropriate adjustments to the items on this page.

CMOS Setup Utility – Copyright (C) 1985-2005, American Megatrends, Inc. CPU PnP Setup	
	Help Item
CPU Type : AMD Athlon (tm) 64 X2 Dual Core Proce CPU Over-clocking Func. : Disabled CPU Frequency : 200 MHz DRAM Frequency : SPD Memory Voltage : Auto	Options Disabled Enabled
↑↓←→: Move +/-: Value Enter: Select F1: General Help Esc: Exit F8: Best Performance Settings F9: Optimized Defaults F10: Save	

Motherboard User's Guide

CPU Type

This item shows the type of the CPU installed in your system.

CPU Over-clocking Func.

This item decides the CPU over-clocking function installed in your system. If the over-clocking fails, please turn off the system power. And then, hold the PageUp key (similar to the Clear CMOS function) and turn on the power, the BIOS will recover the safe default.

CPU Frequency

This item shows the frequency of the CPU installed in your system.

DRAM Frequency

This item shows the frequency of the DRAM in your system.

Memory Voltage

This item determines the DDR voltage adjustment.

Hardware Monitor Page

This page sets up some parameters for the hardware monitoring function of this motherboard.

CMOS Setup Utility – Copyright (C) 1985-2005, American Megatrends, Inc. Hardware Monitor Setup	
*** System Hardware Monitor***	Help Item
CPU Tcontrol :37° C/98° F	
System Temperature :28° C/82° F	
CPU FAN Speed :0 RPM	
System Fan Speed :0 RPM	
CPU Vcore :1.392V	
VDIMM :1.776V	
↑↓←→ Move +/- Value Enter: Select F1: General Help Esc: Exit F8: Best Performance Settings F9: Optimized Defaults F10: Save	

CPU Tcontrol

This item displays the CPU temperature control.

System Temperature

This item displays system temperature measurement.

FANs & Voltage Measurements

These items indicate cooling fan speeds in RPM and the various system voltage measurements.

Load Best Performance Settings

If you select this item and press **Enter** a dialog box appears. If you press **[OK]**, and then **Enter**, the Setup Utility loads a set of best-performance default values. These default values are quite demanding and your system might not function properly if you are using slower memory chips or other low-performance components. .

Load Optimal Defaults

This option opens a dialog box to ask if you are sure to install optimized defaults or not. You select **[OK]**, and then **<Enter>**, the Setup Utility loads all default values; or select **[Cancel]**, and then **<Enter>**, the Setup Utility does not load default values.

Note: It is highly recommend that users enter this option to load optimal default values for accessing the best performance.

Save Changes and Exit

Highlight this item and press **<Enter>** to save the changes that you have made in the Setup Utility configuration. When the Save Changes and Exit dialog box appears, select **[OK]** to save and exit, or **[Cancel]** to return to the main menu.

Discard Changes and Exit

Highlight this item and press **<Enter>** to discard any changes that you have made in the Setup Utility and exit the Setup Utility. When the Discard Changes and Exit dialog box appears, select **[OK]** to discard changes and exit, or **[Cancel]** to return to the main menu.

Note: If you have made settings that you do not want to save, use the "Discard Changes and Exit" item and select **[OK]** to discard any changes you have made.

Chapter 4 Software & Applications

Introduction

This chapter describes the contents of the support CD-ROM that comes with the motherboard package.


The support CD-ROM contains all useful software, necessary drivers and utility programs to properly run our products. More program information is available in a README file, located in the same directory as the software.

To run the support CD, simply insert the CD into your CD-ROM drive. An Auto Setup screen automatically pops out, and then you can go on the auto-installing or manual installation depending on your operating system.

If your operating system is Windows 2000/XP, it will automatically install all the drivers and utilities for your motherboard.

Installing Support Software

- 1 Insert the support CD-ROM disc in the CD-ROM drive.
- 2 When you insert the CD-ROM disc in the system CD-ROM drive, the CD automatically displays an Auto Setup screen.
- 3 The screen displays three buttons of **Setup**, **Browse CD** and **Exit** on the right side, and three others **Setup**, **Application** and **ReadMe** at the bottom. Please see the following illustration.

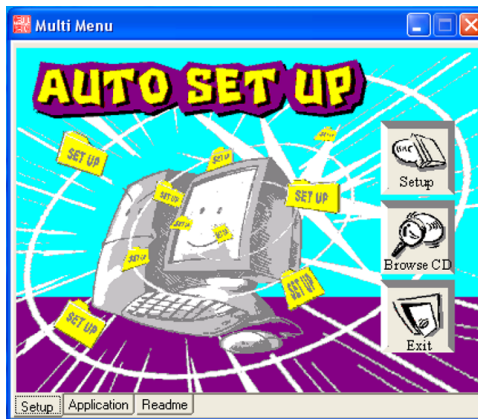

The **Setup** button runs the software auto-installing program as explained in next section.

The **Browse CD** button is a standard Windows command that you can check the

contents of the disc with the Windows file browsing interface.

The **Exit** button closes the Auto Setup window. To run the program again, reinsert the CD-ROM disc in the drive; or click the CD-ROM driver from the Windows Explorer, and click the Setup icon.

The **Application** button brings up a software menu. It shows the bundled software that this mainboard supports.

The **ReadMe** brings you to the Install Path where you can find out path names of software driver.


Auto-Installing under Windows 2000/XP

If you are under Windows 2000/XP, please click the **Setup** button to run the software auto-installing program while the Auto Setup screen pops out after inserting the support CD-ROM:

- 1 The installation program loads and displays the following screen. Click the **Next** button.



- 2 Select the items that you want to setup by clicking on it (the default options are recommended). Click the **Next** button to proceed.

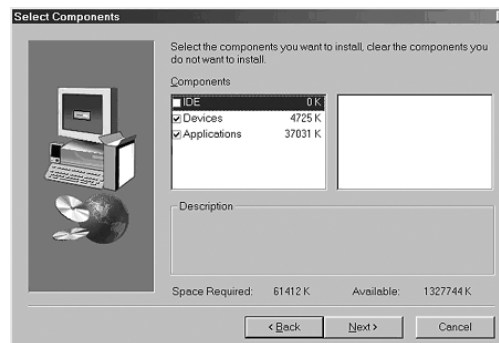

- 3 The support software will automatically install.

Once any of the installation procedures start, software is automatically installed in sequence. You need to follow the onscreen instructions, confirm commands and allow the computer to restart as few times as needed to complete installing whatever software you selected. When the process is finished, all the support software will be installed and start working.

Bundled Software Installation

All bundled software available on the CD-ROM is for users' convenience. You can install bundled software as follows:

- 1 Click the **Application** button while the Auto Setup screen pops out after inserting the support CD-ROM.
- 2 A software menu appears. Click the software you want to install.
- 3 Follow onscreen instructions to install the software program step by step until finished.

AMI/AWARD Flash Utility

This utility lets you erase the system BIOS stored on a Flash Memory chip on the motherboard, and lets you copy an updated version of the BIOS to the chip. Proceed with caution when using this program. If you erase the current BIOS and fail to write a new BIOS, or write a new BIOS that is incorrect, your system will malfunction. Refer to Chapter 3, Using BIOS for more information.

WinFlash Utility

The WinFlash utility is a Windows version of the DOS BIOS flash writer utility. The utility enables you to flash the system BIOS stored on a Flash Memory chip on the motherboard while in a Windows environment. This utility is currently available for WINXP/2000. To install the WinFlash utility, run AFUWIN.EXE (AMI) or WINFLASH.EXE(Award) from the following directory: \UTILITY\AMIFLASH or AWDFLASH.