


n@

NuPRO-500

Specifications

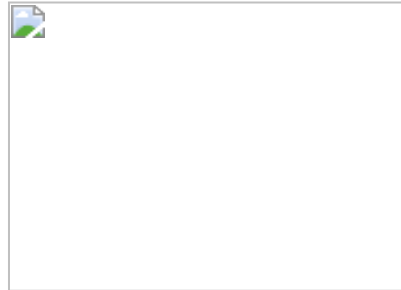

- CPU: Intel MMX / Pentium 75~233MHz, AMD K5/K6, Cyrix 6X86
- Bus Interface: One PCI bus
- Cache Memory: onboard 512KB
- System Chipset: Ali M1541, M1543
- BIOS: AMI PnP Flash BIOS
- System Memory:
Two 72-pin SIMM sockets and one DIMM socket
- Display:
 - C&T 69000 on chip 2M RAM
 - Support LCD/CRT up to 1280 x 1024 256 colors
- Serial Ports:
 - One RS-232 serial ports
 - One RS-232/422/485
- Parallel Port: One SPP/EPP/ECP
- IDE Interface: Primary E-IDE support two drives with DMA33
- FDD Interface: support 2 FDD
- Keyboard/Mouse Connector:
8-pin connector for standard KB and PS/2 mouse
- Ethernet: RJ-45 100-based PCI Ethernet, RTL8139, NE2000 compatible
- Support Rockwell GPS module
- ESS Solo-1 3D Sound on-board
- Watchdog timer: 1,2,10,20,110 or 220 second,
activity trigger with Reset or NMI
- Support PC/104
- Support DOC up-to 72 Mbyte
- Temperature monitoring
- Power consumption:
 - +5V & 6A
 - +12V @ 20mA, -12 @ 20mA
- Operation Temperature: 0 °C~55 °C
- Board Size: 203 mm x 146 mm

Order Information

- NuPRO-500
All-in-one Pentium Little Board