




# Model: AM-639BX



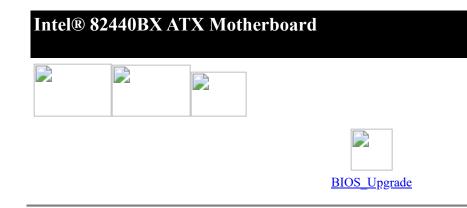

CPU

Intel® Pentium II & III / Celeron at 233 to 550MHz

Cache

L2 Cache is CPU Built-in

Chipset

Intel® 82440BX

# BIOS

1MB Flash EPROM (Support PnP, APM, ACPI, ATAPI, DMI & Windows® 95) IDE AUTO LBA Mode Supports HDDs over 8.4GB Anti-Virus Protection

# System Memory

Up to 384MB Three 168-pin DIMMs Synchronous DRAM (SDRAM) & 3.3V Extended Data Out (EDO) DIMM Depth of 1MB, 2MB, 4MB, 8MB, 16MB and 32MB Support ECC using parity DRAM Modules

#### **Expansion Slot**

Three ISA Bus Slots (one shared with a PCI slot) Four PCI Bus Slots (one shared with a ISA slot) One Accelerated Graphics Port (AGP)

### **Onboard I/O**

Support Two PCI Enhanced IDEs PIO Mode3, Mode4 and Ultra DMA 33 HDDs Twin Headers for Four IDE Device including IDE HDDs and CD-ROMs Support Two Floppy Ports, One ECP/EPP Parallel Port, Two 16550 UART Serial Ports,

Two USB Ports, PS/2 Mouse Port, PS/2 Keyboard Port

## **Onboard Sound (Optional)**

Creative VIBRA 16XV PnP, Creative 3D Enhancement, Wave Synth Wavetable Full-Duplex, Sound Blaster 16 Compatible Line-in, Line-out, Mic-in and MIDI/Game Port (via Cable)

### **Plug and Play**

Plug and Play Specification 1.1 Plug and Play for DOS®, Windows® 3.x and Windows® 95

#### **Other Features**

PC97/98 Ready Support SMM, APM and ACPI Comply to Energy Star "Green PC" Program Supports WAKE-ON-LAN (WOL) Supports Modem Ring-in Wake Up Anti-Virus Protection

All brand names and registered trademarks mentioned are property of their owners