


Model: AM-911

VIAI® Apollo Pro133 Chipset ATX Motherboard





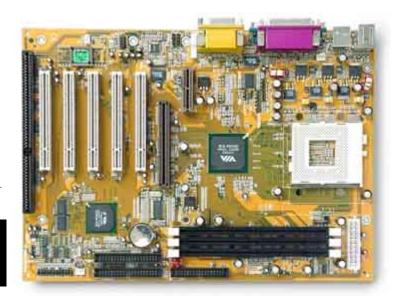

BIOS Upgrade

Technical Specifications

Processor

- AMD® Duron® (200MHz DDR Front Side Bus) (Socket A).

Chip Set

- VIA® KT-133A (686A).

BIOS

- 2M Flash EPROM (Support PnP, APM, ACPI, ATAPI, DMI).
 - IDE AUTO LBA Mode Supports HDDs over 8.4GB.
 - Trend Micro ChipAway Virus Protection.

Cache

- L2 Cache is CPU Built-in.

Memory

- Size up to 768MB.
- Three 168-pins DIMMs.
- Synchronous DRAM (SDRAM).
- DIMMs Depth of 1MB, 2MB, 4MB, 8MB, 16MB and 32MB.

On Board I/O

- Support Two PCI Enhanced IDEs PIO Mode 3, Mode 4 and Ultra DMA 33/66 Channels (Optional Ultra DMA 66 Cable). Twin Headers for Four IDE Devices Including IDE HDDs and CDROMs.
 - Support Two FDDs of 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB.
- One ECP/EPP Parallel Port, Two 16550A UART Serial Ports, Four USB Ports, PS/2 Mouse Port, PS/2 Keyboard Port.

On Board Sound

- Integrated AC97 Controller with Standard AC97 Codec.
- PnP, Full-Duplex, Sound Blaster 16 Compatible, Direct Sound Ready.
 - Line-in, Line-out, Mic-in and MIDI/Game Port.

Hardware Monitoring (Optional)

- Voltage, Temperature, Fan Speed Monitoring, CPU Over Heat Protection.

Expansion Slots

- One ISA Bus Slots (One PCI Shared Slot).
- Five PCI Bus Slots (One ISA Shared Slot).
 - One Accelerated Graphics Port (AGP).
 - One Audio Modem Riser (AMR).

Plug and Play

- Plug and Play Specification 1.1.
- Plug and Play for DOS®, Windows® 3.x, and Windows® 95.

PC97/98

- PC97/98 Ready, PC99 Color Connector.

Power Management

- Support SMM, APM and ACPI.
- Comply to Energy Star "Green PC" Program.
 - Supports Modem Ring-in Wake Up.

PCI

- PCI 2.1 Compliant.

AGP

- AGP 2.0 / 1.0.

VRM

- On Board VRM.

Battery

- On-board Lithium Battery.

Others

- CPU Frequency Multiplier Jumperless (Optional).
 - Alarm Wake-up
 - Bundle "PC-cillin 6" Anti Virus Software.

Board Size

- ATX Form Factor.

All brand names and registered trademarks mentioned are property of their owners