



ARTISAN[®]
TECHNOLOGY GROUP

Your **definitive** source
for quality pre-owned
equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com

Full-service, independent repair center

with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment

along with credit for buybacks and trade-ins.

Custom engineering

so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - [Click HERE](#)

SBC82621

Socket 370 PCI CPU Card with Dual Ethernet

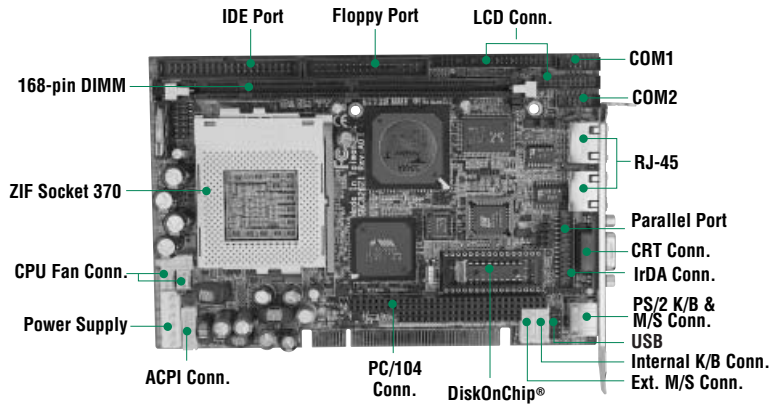

Features



- ▶ Socket 370 for Intel® Pentium® III/Celeron® and VIA C3 processor
- ▶ Supports CRT / LCD (TFT/STN/DSTN)
- ▶ Supports Gigabit Ethernet and Fast Ethernet
- ▶ DOC

System

CPU	Socket 370 for Intel® Pentium® III/Celeron® and VIA C3 processor; 533~1.4GHz
System Memory	1 x 168-pin SDRAM, max. up to 512MB
Chipset	VIA VT8606 (Twist-T) + VT82C686B
BIOS	Phoenix-Award 4Mbit with RPL/PXE LAN boot ROM, SmartView and customer CMOS backup
SSD	DiskOnChip®
Watchdog Timer	System rest and NMI; 64 Levels, 0.5~8 / 5~80 / 50~800 / 100~1600 Seconds
Extension Interface	PC/104 and PCI Golden Finger expansion interface
Battery	Lithium 3V/196 mAH
Size/Weight	185mm x 122mm / 0.3kg
Temperature	0~60°C, operation
Operation Humidity	10% ~ 95% relative humidity, non-condensing

I/O

MIO	1 x ATA-100 IDE, 1 x FDD, 1 x K/B + M/S, 1 x RS-232, 1 x RS-232/422/485, 1 x LPT, 1 x IrDA
Ethernet	RTL8100C, 10/100Base-T with WOL and boot ROM features; optional with RTL8110S for Gigabit Ethernet
USB	2 x USB ports; USB 1.1 compliant

Display

Chipset	VIA Twister chip with integrated S3 Pro Savage4 2D/3D/Vedio accelerator
Memory Size	8/16/32MB frame buffer sharing system memory
Resolution	CRT mode: 1280 x 1024 @ 16bpp (60Hz), 1024 x 768 @ 16bpp (85Hz) LCD/Simultaneous mode: 1600 x 1200 @ 16bpp (60Hz), 1024 x 768 @ 16bpp (60Hz), 1080 x 1024 @ 16bpp (60Hz)
Output Interface	AGP-4X CRT/LCD interface, support for 9,12,18,24,36-bit TFT and 16 or 24-bit DSTN panels up to SXGA resolution


Packing List

- Quick installation guide
- Manual, driver & utility CD
- I/O cable kit (1x40-pin IDE, 1x34pin FDD, 1xCOM+LPT with bracket)

Ordering Information

Standard	
SBC82621VEE	With integrated VGA for CRT/LCD output, dual RTL8100C for fast Ethernet
SBC82621VE	With CRT/LCD and fast Ethernet
Optional	
SBC82621VGE	With integrated VGA for CRT/LCD output, RTL8110S for Gigabit and RTL8100C for fast Ethernet
CK9A000	1 x COM + 2 x USB wiring kit
PK8980	LCD kit for 18-bit TTL LCD with Hirose DF9-41P-1V connector
PK95000-24	LCD kit for 24-bit single channel LVDS
PK95000-48	LCD kit for 48-bit dual channel LVDS
ATX6021/4	4-slot passive backplane
ATX6021/5	5-slot passive backplane
04310016900L	CPU cooler for PIII
Enclosure Options	
AX6033	4-slot MicroBox with 70W AC P/S
AX60530	6-slot MicroBox with 150W AC P/S
EM60320D	Embedded MicroBox with 70W AC P/S

Dimensions

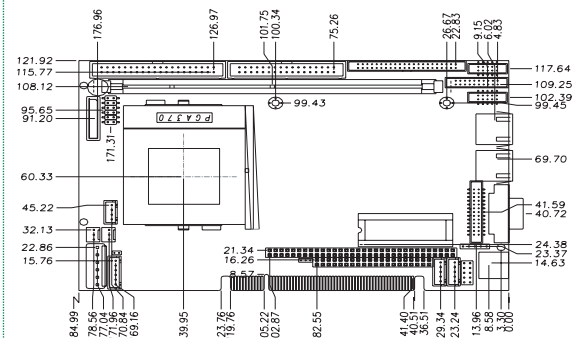

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at artisanng.com for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanng.com | artisanng.com

