


BL330-B

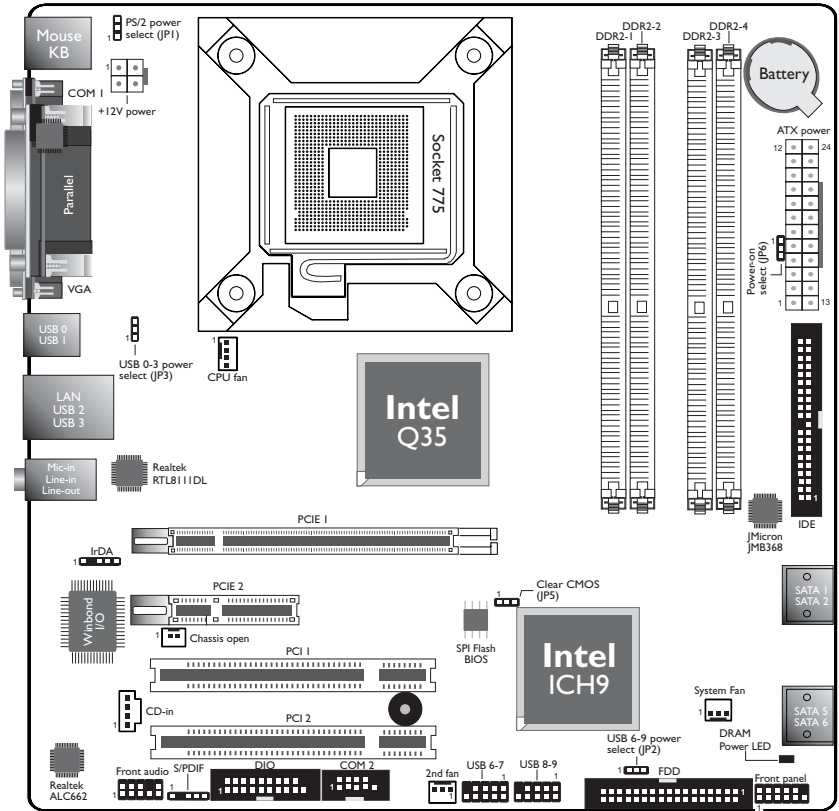

Clear CMOS Data	JP5	PS/2 Power	JP1
Normal (default)	1-2 On	5V (default)	1-2 On
Clear CMOS Data	2-3 On	5V_standby	2-3 On

USB Power: 0-3 (JP3), 6-9 (JP2)	Power-on Select	JP6
5V (default)	Power-on via AC power	2-3 On
5V_standby	Power-on via power button	1-2 On