


BL630-DR

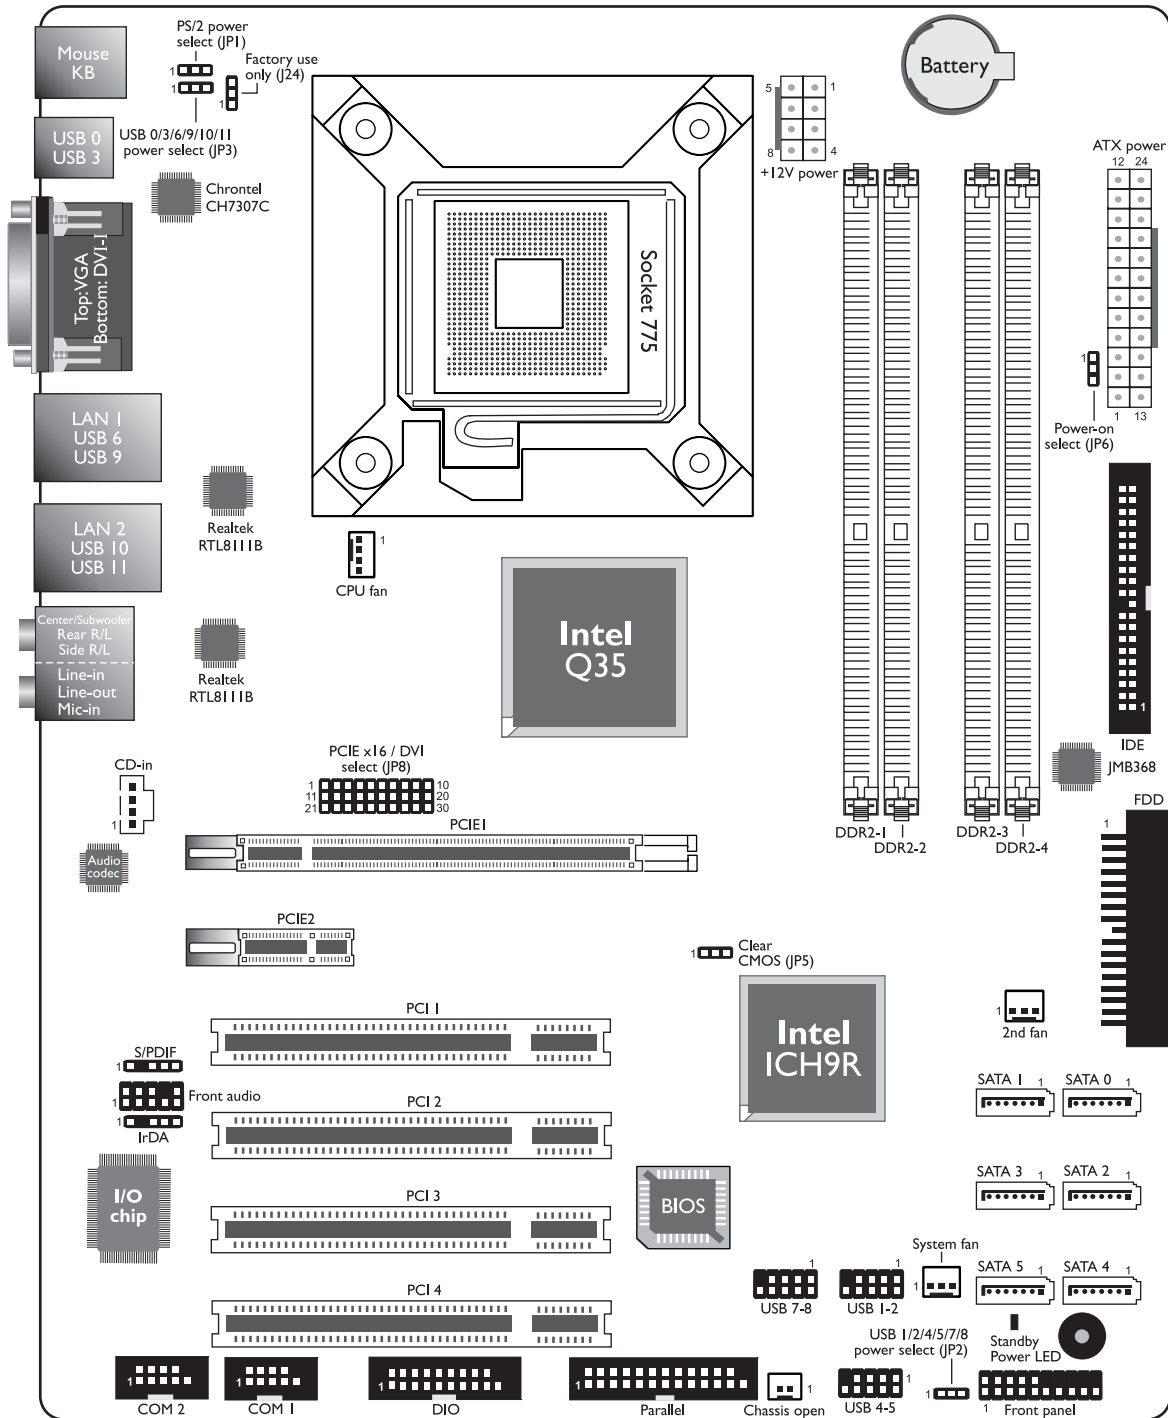

| | |
|------------------|--------|
| Clear CMOS Data | JP5 |
| Normal (default) | 1-2 On |
| Clear CMOS Data | 2-3 On |

| | |
|---------------------------|--------|
| Power-on Select | JP6 |
| Power-on via AC power | 2-3 On |
| Power-on via power button | 1-2 On |

| | |
|--------------|--------|
| PS/2 Power | JPI |
| 5V (default) | 1-2 On |
| 5V_standby | 2-3 On |

| USB Power: 0/3/6/9/10/11 (JP3), 1/2/4/5/7/8 (JP2) | |
|---|--------|
| 5V (default) | 1-2 On |
| 5V_standby | 2-3 On |

| PCIE x16 / DVI Select | JP8 |
|-----------------------|-----------------|
| PCIE x16 | 11-20, 21-30 On |
| DVI (default) | 1-10, 11-20 On |