


# CA100-D

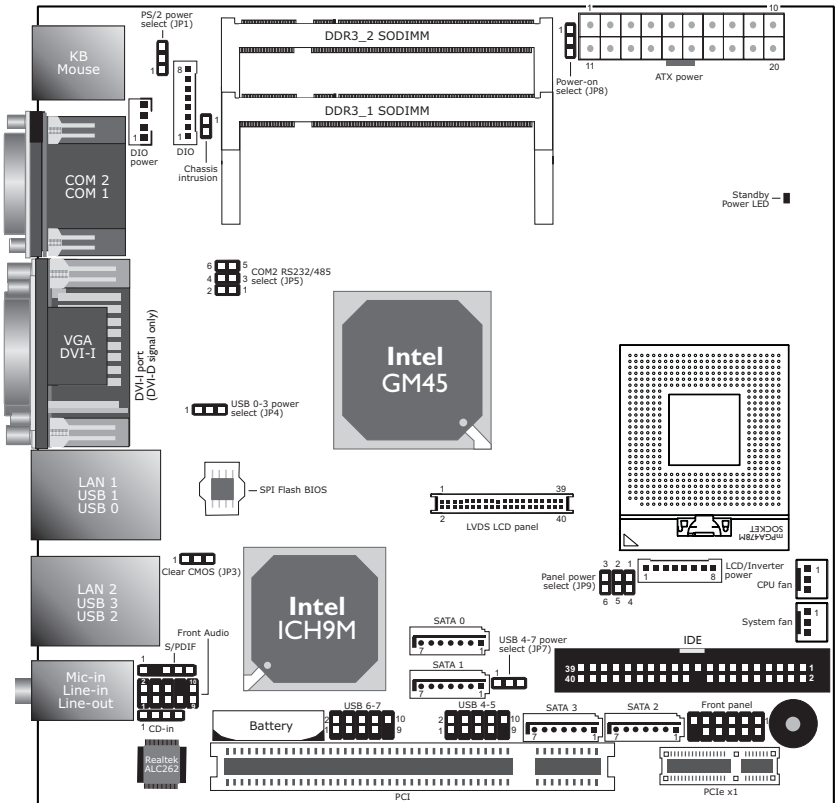

Power-on Select	JP8
Power-on via power button (default)	1-2 On
Power-on via AC power	2-3 On

USB Power: 0-3 (JP4), 4-7 (JP7)	
5V (default)	1-2 On
5V_standby	2-3 On

COM 2 RS232/RS485 Select (JP5)	
RS232 (default)	1-2 On
RS485	5-6 On

Clear CMOS Data	JP3
Normal (default)	1-2 On
Clear CMOS Data	2-3 On

Panel Power Select	JP9
+12V	1-4 On
+5V	2-5 On
+3.3V (default)	3-6 On

PS/2 Power	JP1
5V (default)	1-2 On
5V_standby	2-3 On