



# CT930-B

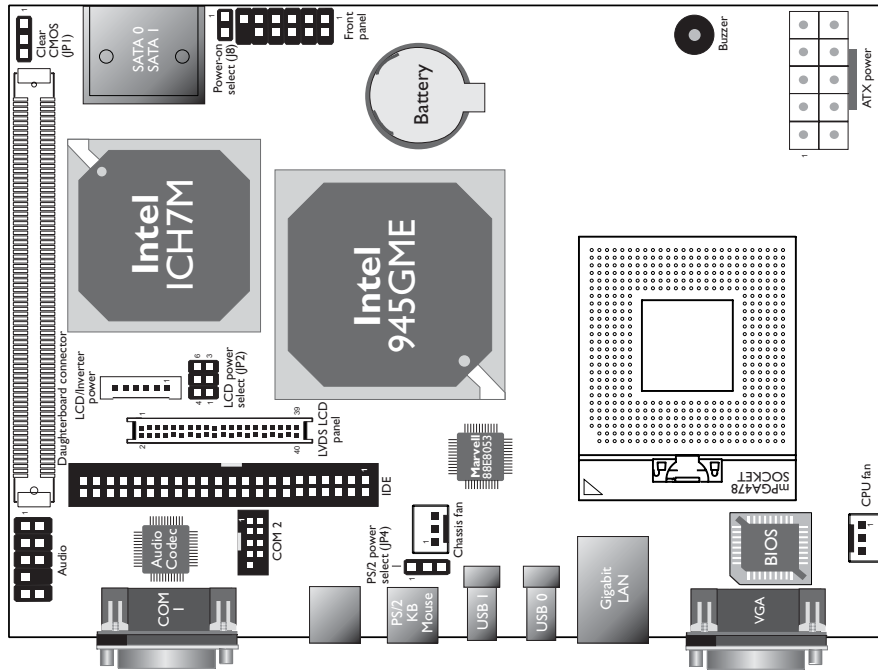

Component side

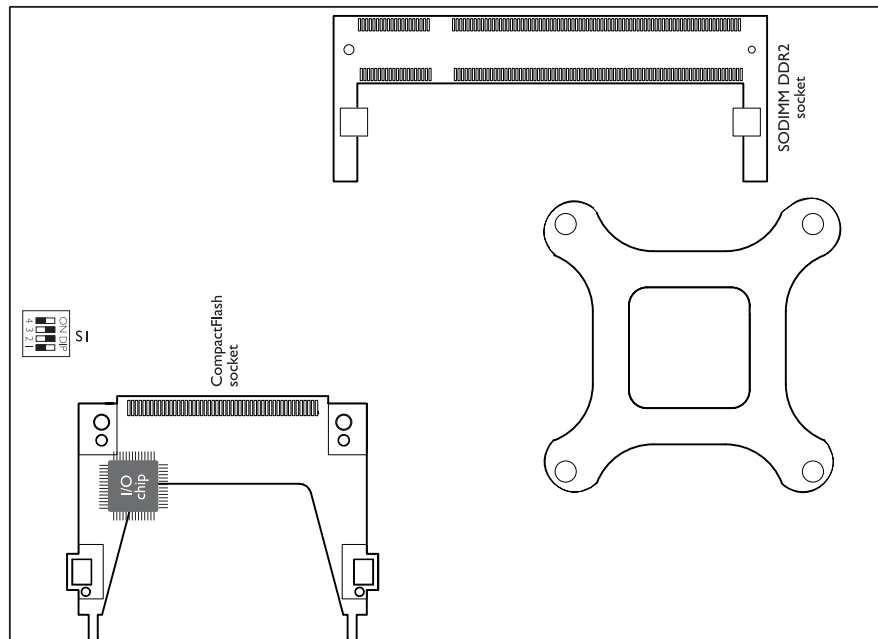

Solder side

Clear CMOS Data	JPI
Normal (default)	1-2 On
Clear CMOS Data	2-3 On

PS/2 Power	JP4
5V (default)	1-2 On
5V_standby	2-3 On

SI DIP Switch Option	1	2	3	4
Inverter High Enable, Panel 3.3V or 5V	Off	On	On	Off
Inverter Low Enable, Panel 3.3V or 5V	On	Off	On	Off
Inverter High Enable, Panel 12V	Off	On	Off	On
Inverter Low Enable, Panel 12V	On	Off	Off	On

LCD Power Select	JP2
12V	1-4 On
5V	2-5 On
3.3V	3-6 On

Power-on Select (optional)	J8
Power-on via AC power	On
Power-on via power button	Off