




Main Board

P3/370A-VP

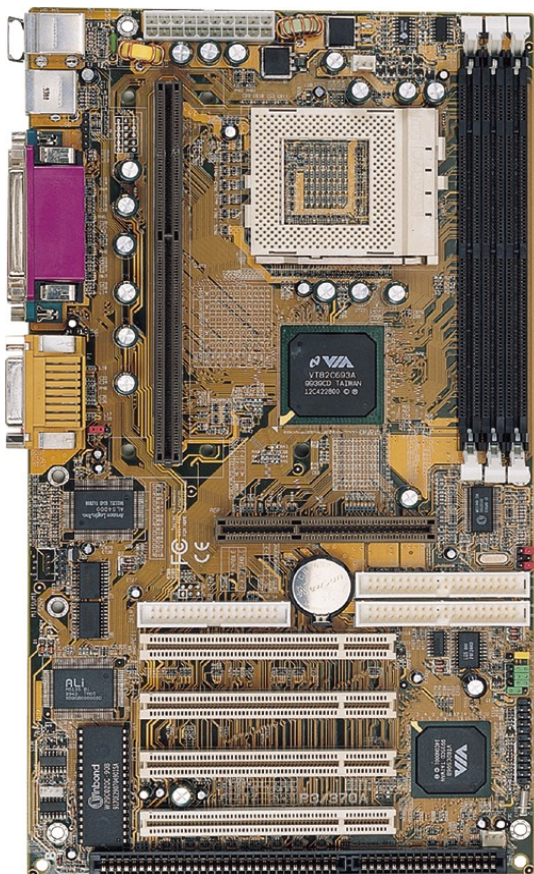

- BIOS Green feature function, and “Plug & Play” Flash ROM

Features

- Support Desktop Management Interface (DMI) through BIOS
- Modem Remote Ring On
- Wake up on LAN
- RTC Wake Up Alarm: Program the date/time to wake up your system
- Support Ultra DMA 33/66
- Support 133MHz FSB frequency
- Support Accelerated Graphics Port (AGP) cards for high performance
- ALS4000 Sound Chip On Board (Optional)
- Auto detect CPU core Voltage and support jumpless function to select CPU frequency

DCS Multimedia World -

Head Office:

DCS Computer Systems Co., Ltd.

9F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan R.O.C.

Tel: 886-2-2696-4875 Ext. 1354 ~ 1356


Fax: 886-2-2696-4878

<http://www.dcscomputer.com.tw/>

Sales Dept. E-mail: mminfo@sertek.com.tw

Technical Dept. E-mail: mmserv@sertek.com.tw

Authorized Distributors





Main Board

Specifications

CPU	Intel Slot 1 or Socket 370 Processor Pentium II/III Coppermine Celeron
M.B. Chipset	VIA VT82C693A & VT82C596B
PCI Sound chipset	ALS4000
Architecture	AGP * 1, ISA * 1, PCI * 4
Max. Memory	168-pin DIMM * 3 Up to 1.5GB SDRAM

IDE

- Dual channel PIO and PCI Bus Master IDE ports support up to 4 E-IDE devices for HDD or CD-ROM
- Supports PIO Mode 4 with data transfer rate up to 14MB/Sec
- Supports Ultra DMA 33/66 with data transfer rate up to 33/66MB/Sec

BIOS

- Award BIOS with built-in Anti-Virus, APM, DMI and ACPI support, and green function (PnP BIOS)
- Supports CD-ROM, SCSI, and LS120/ZIP boot up
- 2Mbits flash ROM

I/O Devices

- 1 FDD control port supports two of the 5.25" or 3.5" floppy drives up to 2.88MB
- 2 Serial ports (16550 UARTs)
- 1 Parallel port (EPP/ECP)
- 1 PS2 Mouse port
- 1 PS/2 keyboard connector

USB Ports

- 2 USB ports support up to 127 peripheral devices
- Supports 12Mb/s (high speed) & 1.5Mb (low speed) transfer rate

IR Port

- 1 HPSIR/ASKIR compatible IrDA interface port (Cable optional)

Sound Multimedia Port (optional)

- 1 Game port
- 1 Line in
- 1 Line out
- 1 Microphone in

Power Management

- Supports Modem remote Ring-On function
- Supports software power off function
- Supports RTC Wake-Up

Board Size

- 305mm x 170mm ATX Form Factor

DCS Multimedia World -

Head Office:

DCS Computer Systems Co., Ltd.

9F, 88, Sec. 1, Hsin Tai Wu Rd., Hsichih,
Taipei Hsien 221, Taiwan R.O.C.

Tel: 886-2-2696-4875 Ext. 1354 ~ 1356

Fax: 886-2-2696-4878

<http://www.dcscomputer.com.tw/>

Sales Dept. E-mail: mminfo@sertek.com.tw

Technical Dept. E-mail: mmserve@sertek.com.tw

Authorized Distributors

