


# G7L630-B

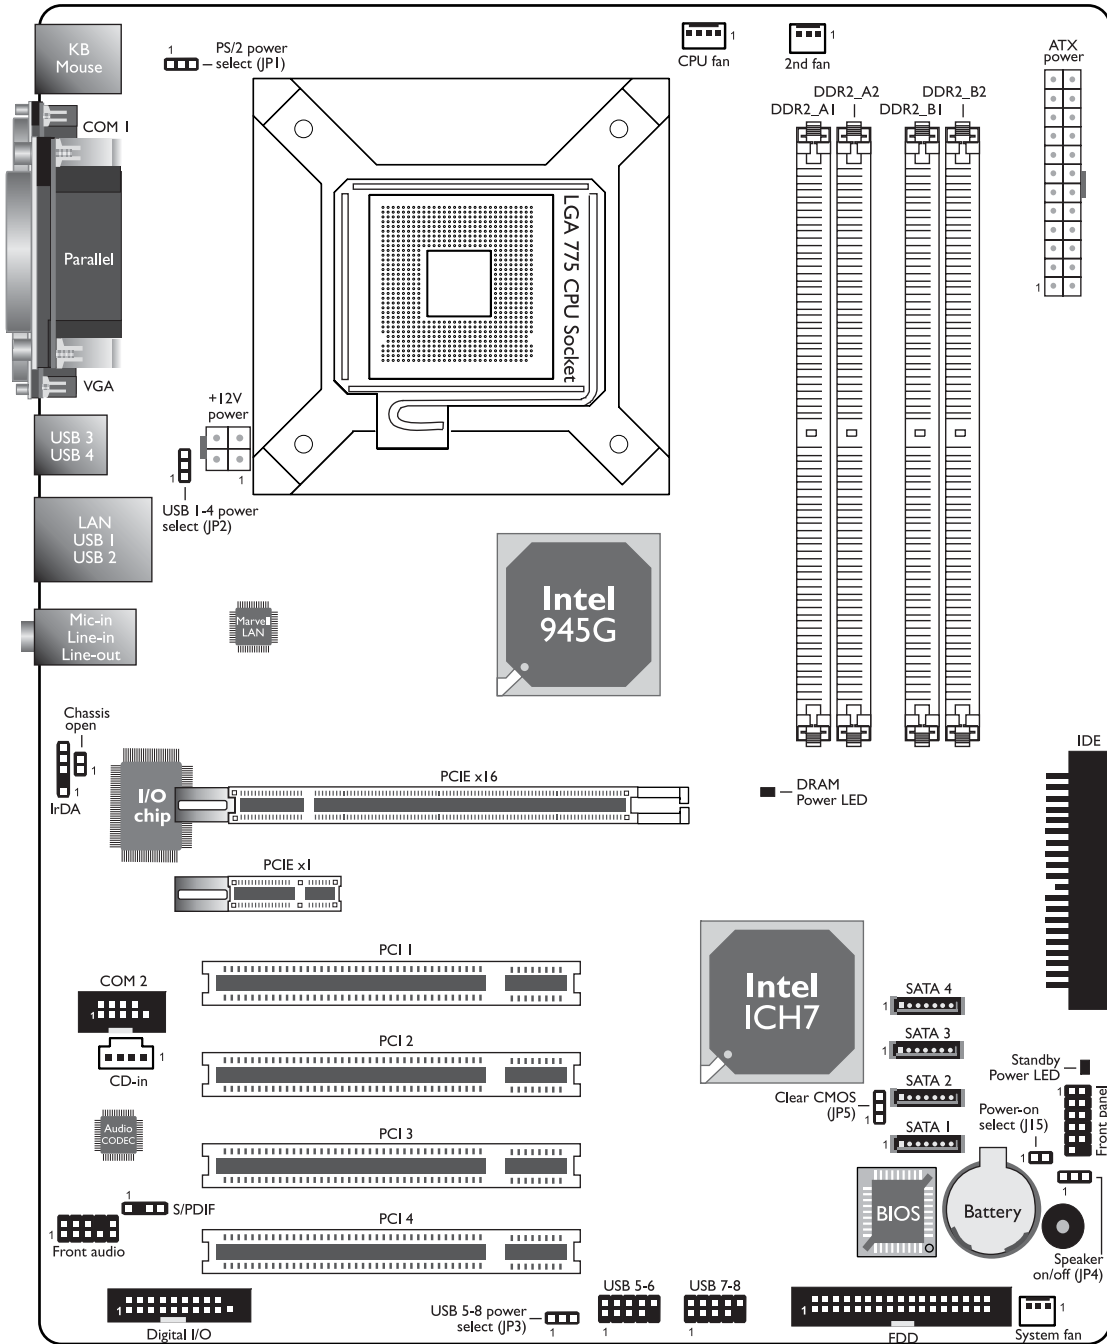

PS/2 Power	JP1
5V (default)	1-2 On
5VSB	2-3 On

Speaker On/Off	JP4
Speaker On (default)	1-2 On
Speaker Off	2-3 On

USB Power: 1-4 (JP2), 5-8 (JP3)	
5V (default)	1-2 On
5VSB	2-3 On

Power-on Select	JP5
Power-on via AC power	Short
Power-on via power button	Open

Clear CMOS Data	JP5
Normal (default)	1-2 On
Clear CMOS Data	2-3 On