


F845GE

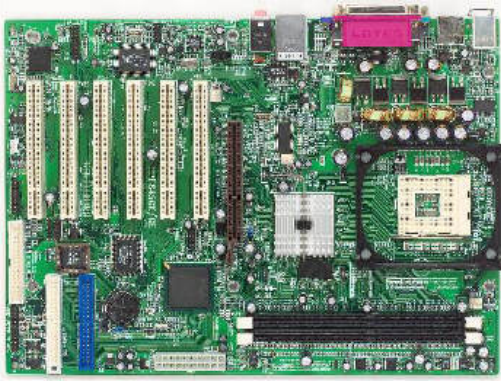

Key Features

ATX form factor

Intel 845GE+ICH4

Support Intel P4 processor with 533MHz system bus

Support maximum 2GB DDR266/DDR333 SDRAM with 2 DIMMs

Support one 15 pins VGA port for integrated graphics

Support one 1.5V AGP 2X/4X slot for AGP card add on

Support 6 PCI slots

Support 6 USB 2.0 ports

Realtek 8100B LAN on board option

CPU

- Supports Intel® Pentium® 4 processor in 478 pin package.

- Supports 1.5GHz, 1.6GHz, 1.7GHz, 1.8GHz, 1.9GHz, 2GHz, 2.1GHz, 2.2GHz and up.

Chipset

Intel® 845GE (760 FCBGA) Chipset

- Supports high performance integrated graphics display

- Supports DDR SDRAM at 266/333 MHz operation (DDR266/DDR333).

- AGTL+ host bus with integrated termination supporting 32-bit host addressing.

- 1.5V AGP interface with 4x data transfer and 4x fast write capability.

- 8-bit, 66MHz 4x hub interface to the Intel ICH4.

Intel® ICH4 (421EBGA) Chipset

- Upstream hub interface for access to the Intel MCH.

- 2-channel Ultra ATA/100 Bus Master IDE controller.

- 2 USB 2.0 controllers for 6 ports.

- I/O APIC.

- SMBus controller.

- FWH interface.

- LPC interface.

- AC'97 2.2 interface.

- PCI 2.2 interface.

- Integrated system management controller.

FSB

- Support 100/133MHz FSB

- Support 400/533MHz Intel NetBurst micro-architecture bus.

Main Memory

- Supports four memory banks 184-pin 2 DDR DIMMs.

- Supports up to 2GB PC2100/PC2700 DDR(DDR266/333) SDRAMs.

- Supports 2.5v DDR SDRAM.

Slots

- One AGP (Accelerated Graphics Port) 4x slot (1.5V only).

- Six PCI 2.2 32-bit Master PCI bus slots (support 3V, 5V PCI bus interface).

NOTE : If plugging in 3.3v AGP card system won't be powered on

On-Board IDE

- An IDE controller on the ICH4 chipset provides IDE HDD/CD-ROM with PIO,

Bus Master and Ultra DMA66/100 operation modes.

- Can connect up to four IDE devices.

Audio

AC-97 2.1 Codec on board

On-Board Peripherals

On-Board Peripherals include:

- 1 floppy port supports 2 FDDs with 360K, 720K, 1.2M, 1.44M and 2.88Mbytes.

- 1 VGA port for 845G chipset integrated graphics output

- 1 serial ports (COM A) and can extend one more(COM B).

- 1 parallel port supports SPP/EPP/ECP mode.

- 1 IrDA head for SIR/ASKIR/HPSIR.

- 1 audio jack

- - 1 extend game port.

- - 6 USB 2.0 ports(4 on board, 2 extend)

- 1 RJ45 LAN port(only for LAN on board request)

BIOS

- The mainboard BIOS provides "Plug & Play" BIOS which detects the peripheral devices

and expansion cards of the board automatically.

Dimension

30.5 cm(L) x 24.5 cm(W) ATX Form Factor

Special Options

Realtek 8100B LAN on board option

本站所提及之品牌与产品皆属其对应之所有权人

本站硬件博物馆图片和硬件论坛会员藏品图片均有版权，必须保留Logo、注明出处或取得所有者授权。

[关于我](#) [网站地图](#) [联系我](#)