


FKT400 Socket A Motherboard

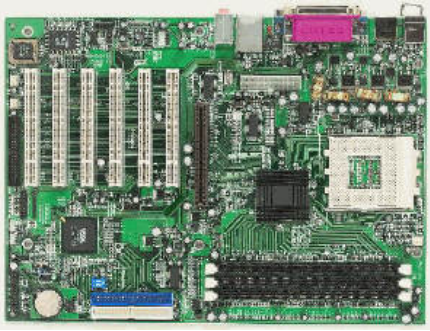

Picture N/A Key Features

ATX form factor

Support Socket A for AMD Athlon/Athlon XP/Duron

Support 3 DDR200/DDR266/DDR333/DDR400 DIMMs

Support 1 8X AGP slot

Support 6 PCI Bus Master Slot

Support ATA-133 Hard Driver

Support 6 USB 2.0 Ports

Support AC-97 Audio

VIA LAN option (VT6103 10/100)

CPU

- Support Socket A (Socket 462) for AMD? Athlon? / Athlon XP / Duron? processor.

- Support 600MHz up to 2100+ MHz processor and higher.

Chipset

VIA? 828 BGA) Chipset

- FSB @200/266MHz

- AGP 8X and PCI Advanced high performance memory controller

VIA? VT8235 (487 BGA) Chipset

- High Bandwidth V-link Client controller

- Integrated Faster Ethernet LPC

- Integrated Hardware Sound Blaster/Direct Sound AC97 audio

- Ultra DMA 66/100/133 master mode PCI EIDE controller

- ACPI

FSB

- 100/133 (200/266)MHz clocks are supported.

Main Memory

- Support six memory banks using three 184-pin DDR DIMMs.

- Support a maximum memory size up to 3GB.

- Support 2.5v DDR200/266/333/400 DDR SDRAM DIMM.

Slots

- One AGP (Accelerated Graphics Port) slot.

* AGP 3.0 8X specification compliant.

- Six 32-bit Master PCI Bus slots.

- Supports 3.3V/5V PCI bus Interface.

On-Board IDE

- An IDE controller on the VIA? VT8235 chipset provides IDE HDD/CD-ROM with PIO,

Bus Master and Ultra DMA 66/100/133 operation modes

- Can connect up to 4 IDE devices

Audio

Integrated AC-97 audio Chipset

- Direct Sound AC'97 Audio

On-Board Peripherals

On-Board Peripherals include:

- 1 floppy port supports 2 FDD with 360K, 720K, 1.2M, 1.44M and 2.88Mbytes

- 2 serial ports (COMA and COMB)

- 1 parallel port supporting SPP/EPP/ECP mode

- 2 IrDA connector for SIR/ASKIR/HPSIR

- 1 Audio/Game port

- 6 USB 2.0 ports (4 on board, 2 extend)

BIOS

- The mainboard BIOS provides "Plug & Play" BIOS which detects the peripheral devices

and expansion cards of the board automatically.

Dimension

30.4 cm(L) x 24.5 cm(W) ATX Form Factor.