


G7B330-B

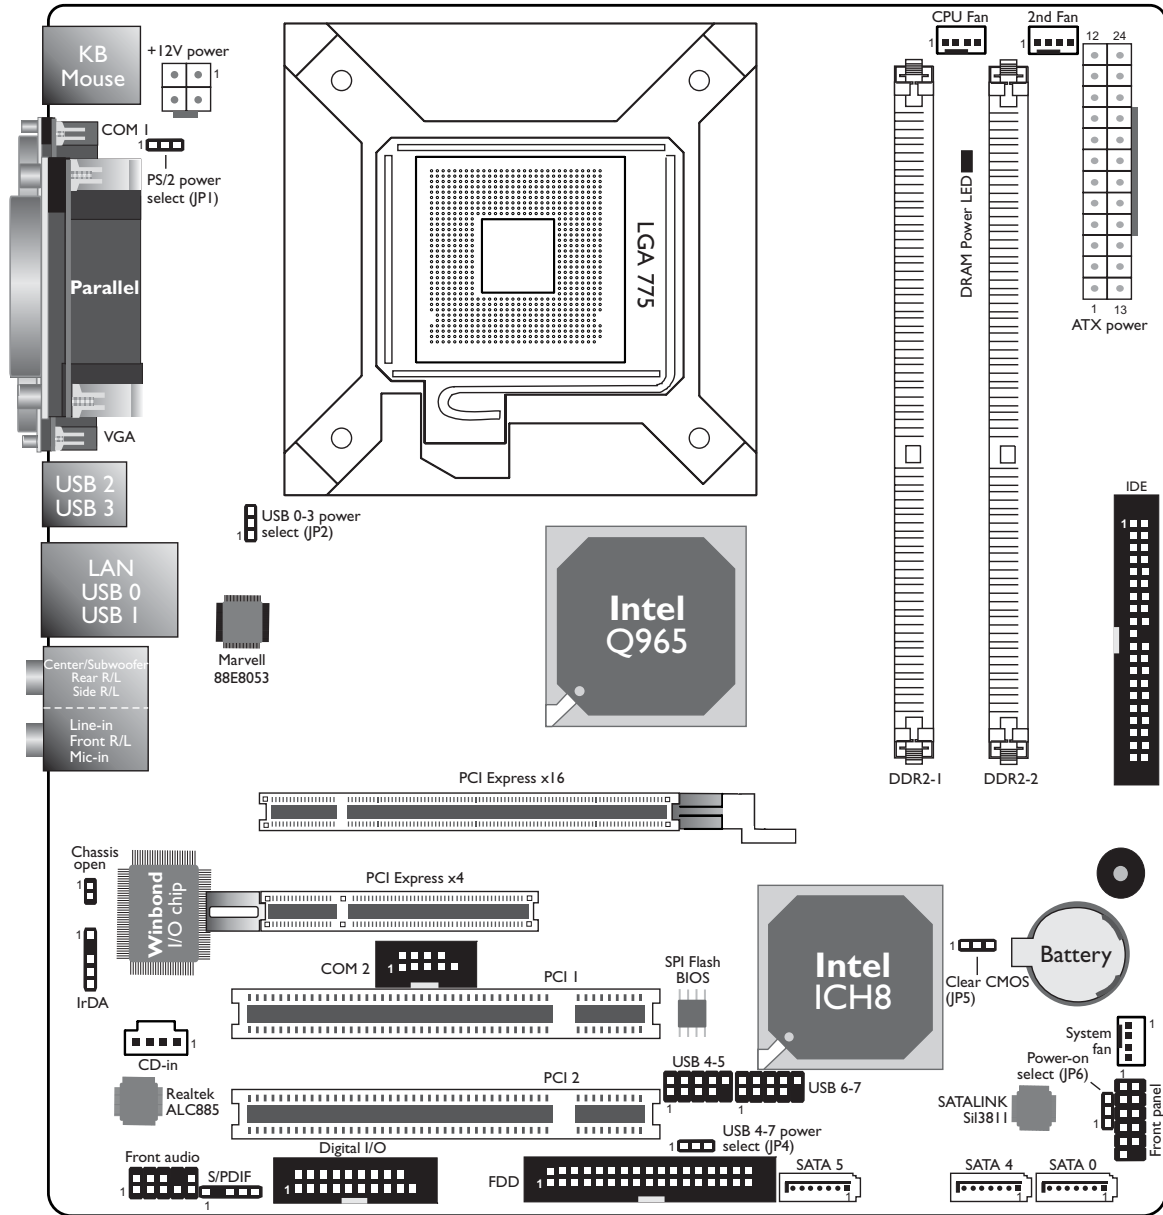

PS/2 Power	JP1	USB Power: 0-3 (JP2), 4-7 (JP4)	
5V (default)	1-2 On	5V (default)	1-2 On
5V_standby	2-3 On	5V_standby	2-3 On

Clear CMOS Data	JP5	Power-on Select	JP6
Normal (default)	1-2 On	Power-on via AC power	1-2 On
Clear CMOS Data	2-3 On	Power-on via power button	2-3 On