


# G7B630-N

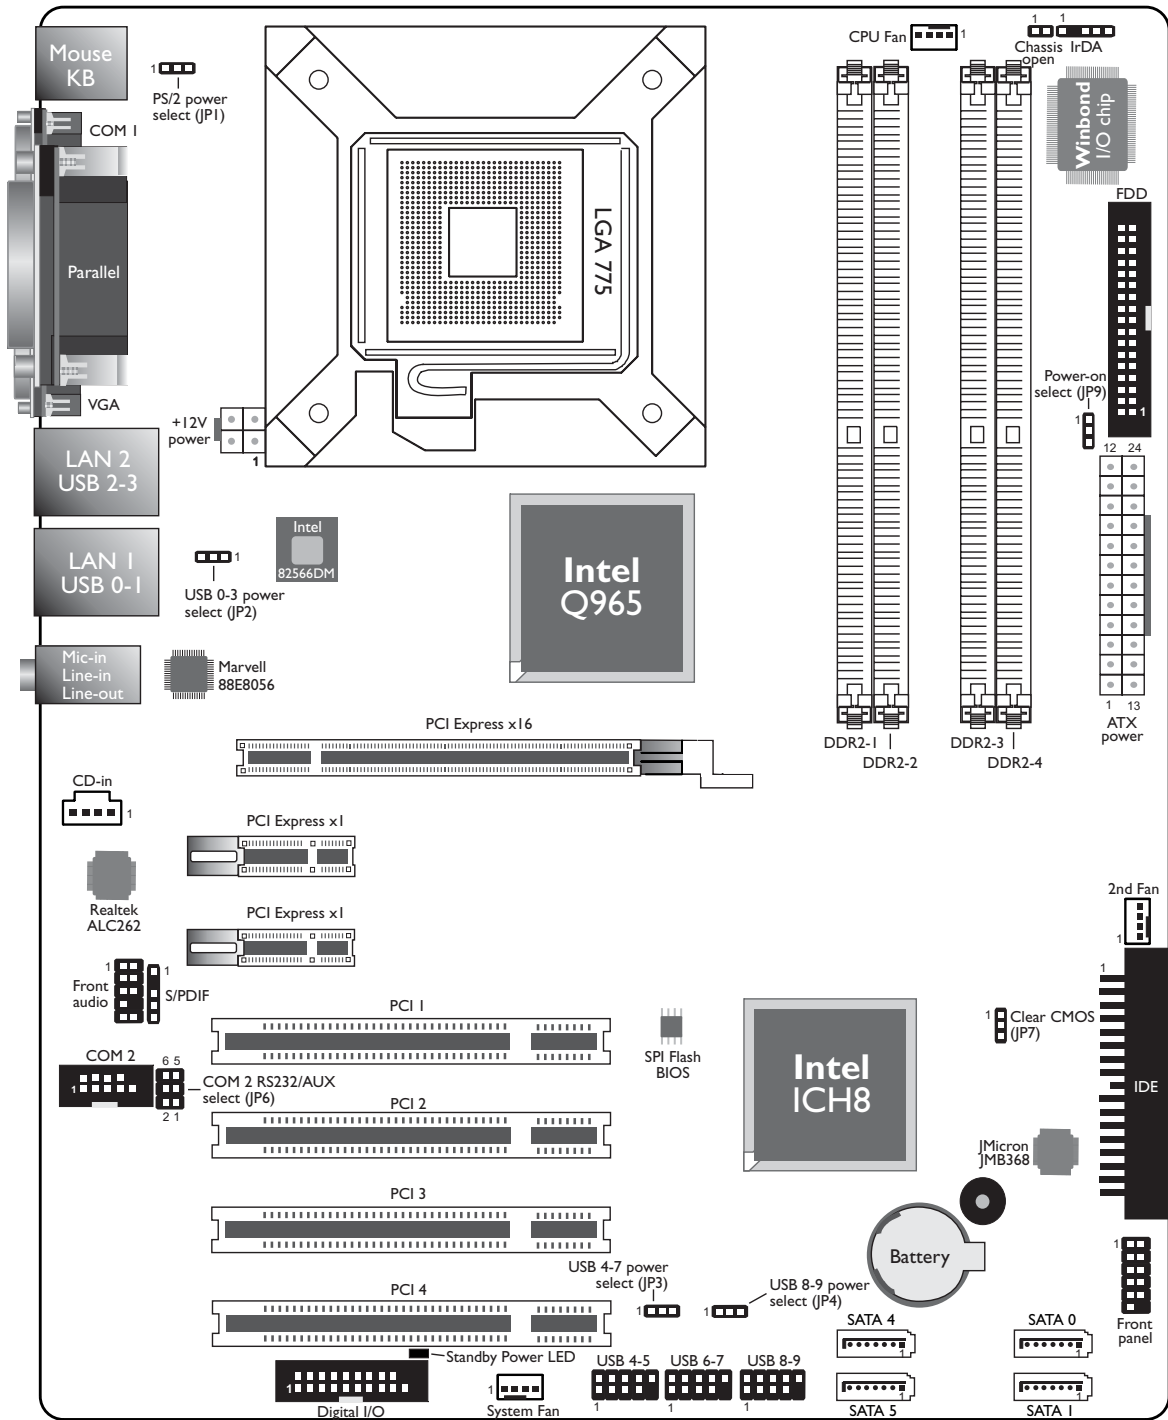

Clear CMOS Data	JP7
Normal (default)	1-2 On
Clear CMOS Data	2-3 On

PS/2 Power	JP1
5V (default)	1-2 On
5V_standby	2-3 On

USB Power: 0-3 (JP2), 4-7 (JP3), 8-9 (JP4)	
5V (default)	1-2 On
5V_standby	2-3 On

COM 2 RS232/AUX Select	JP6
RS232	1-3, 2-4 On
Auxiliary power	3-5 (5V), 4-6 (12V) On

Power-on Select	JP9
Power-on via power button	1-2 On
Power-on via AC power	2-3 On