


G7B630-NR

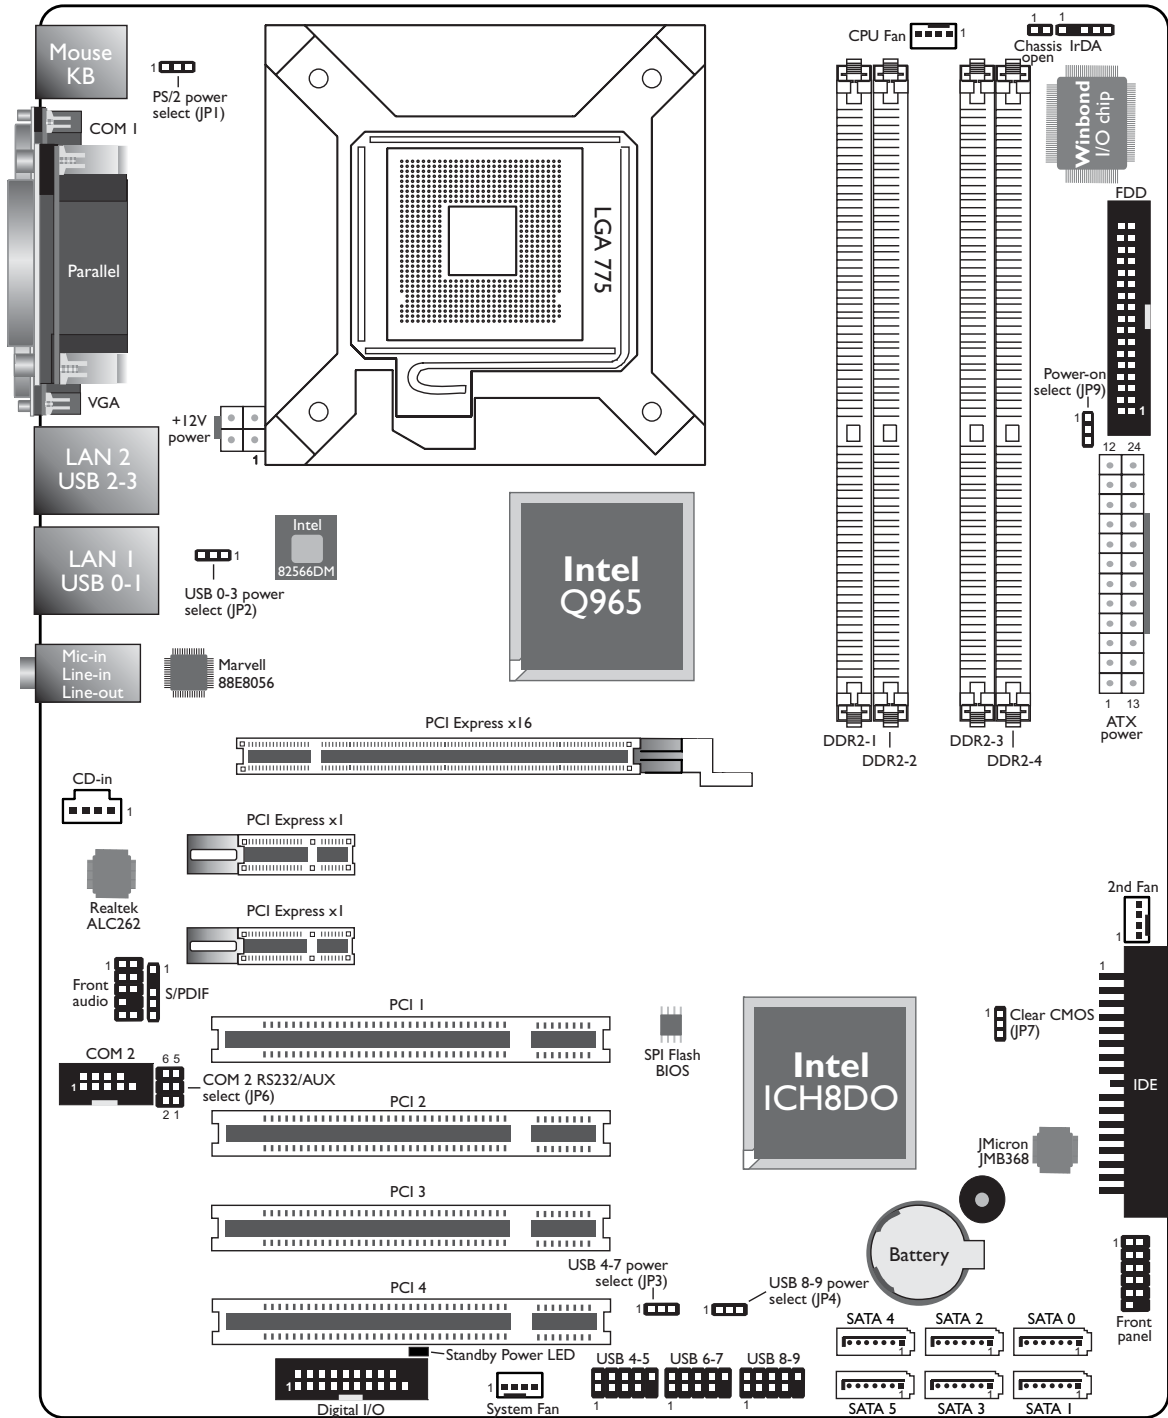

| | |
|------------------|--------|
| Clear CMOS Data | JP7 |
| Normal (default) | 1-2 On |
| Clear CMOS Data | 2-3 On |

| | |
|--------------|--------|
| PS/2 Power | JP1 |
| 5V (default) | 1-2 On |
| 5V_standby | 2-3 On |

| | |
|--|--------|
| USB Power: 0-3 (JP2), 4-7 (JP3), 8-9 (JP4) | |
| 5V (default) | 1-2 On |
| 5V_standby | 2-3 On |

| | |
|------------------------|------------------------|
| COM 2 RS232/AUX Select | JP6 |
| RS232 | 1-3, 2-4 On |
| Auxiliary power | 3-5 (5V), 4-6 (12V) On |

| | |
|---------------------------|--------|
| Power-on Select | JP9 |
| Power-on via power button | 1-2 On |
| Power-on via AC power | 2-3 On |