


G7L33 I-L

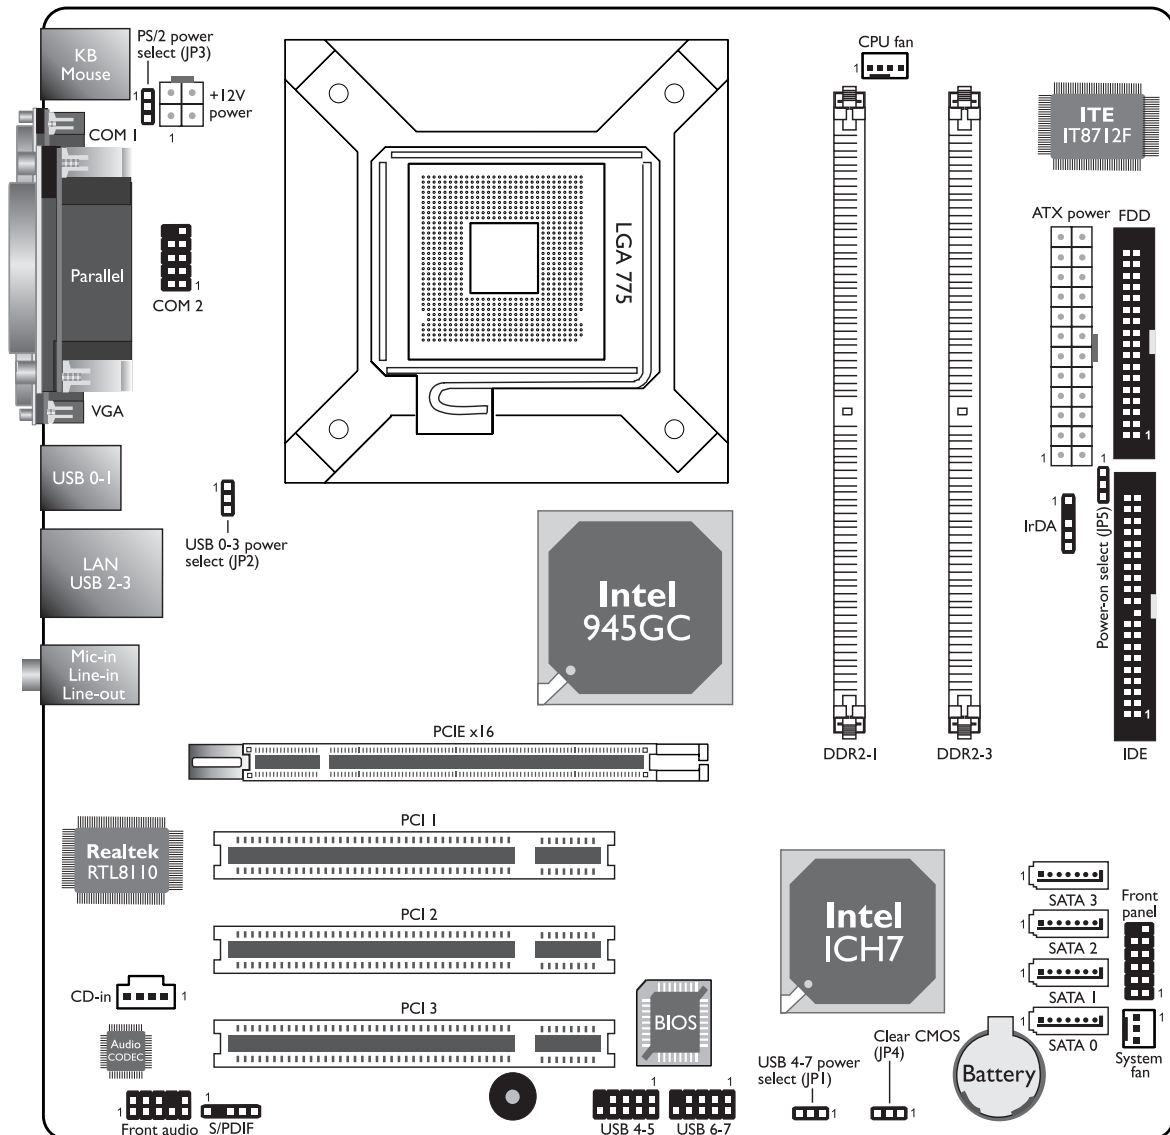

PS/2 Power	JP3
5V (default)	1-2 On
5VSB	2-3 On

USB Power: 0-3 (JP2), 4-7 (JP1)	
5V (default)	1-2 On
5VSB	2-3 On

Clear CMOS Data	JP4
Normal (default)	1-2 On
Clear CMOS Data	2-3 On

Power-on Select	JP5
Power-on via power button	1-2 On
Power-on via AC power	2-3 On