


JJ-110B	
	ISA Bus, Half Size, Pentium MMX SBC (75-233 MHz CPU)
Features:	
CPU:	75~233MHz CPU for Intel Pentium MMX , AMD K5、 K6, Cyrix 6x86
Bus Interface:	ISA Bus
System Chipset:	SiS 5571
VGA Controller:	C&T; 65550 and 1MB memory support CRT/Panel up to 1024x768 256 colors
IDE Interface:	Four IDE disk drives support Mode 3/4, transfer rate 16.6MB/sec
Memory:	Two SIMM sockets provides up to 128MB
I/O Chipset:	Two SMCR 37C669
Cache Memory:	512KB Pipeline burst
Parallel Port:	Supports SPP/ECP/EPP
Floppy Interface:	Support up to two floppy disk drives
Serial Port:	Two RS-232 serial port all including 16C550 UART with 16byte FIFO
BIOS:	Award Y2K PnP Flash BIOS
Watch-Dog Timer:	Set 1, 2, 10, 20, 110, or 220 seconds, activity trigger with Reset or NMI
DMA Channels:	7
Interrupt Levels:	15
Keyboard:	PS/2 6-pin Mini Din or 5-pin header
Mouse:	PS/2 6-pin Mini Din
USB:	Supports two USB ports
IR Interface:	One IrDA TX/RX header
DiskOnChip (DOC):	Socket for DiskOnChip
Extra Power:	One 8-pin Power connector
CMOS:	DS12C887 or equivalent device
CPU Temperature Alarm:	Beeping alarm when CPU's temperature over heating limited
Power Voltage:	+5V (4.75V to 5.25V), +12V, -12V
Maximum Power Consumption:	+5V@6A, +12V@120mA, -12V@100mA
Operating Temperature:	0-60°C
Board Size:	7.3"(L) x 4.8" (W)
Ordering Information:	
JJ-110B	
ISA Bus, Half Size, MMX SBC	

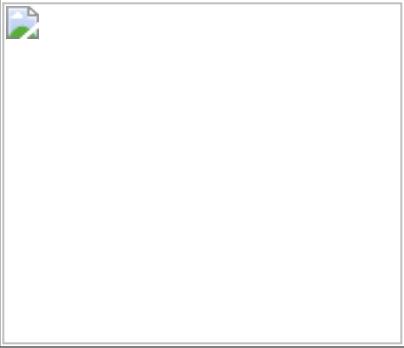