


KT-748

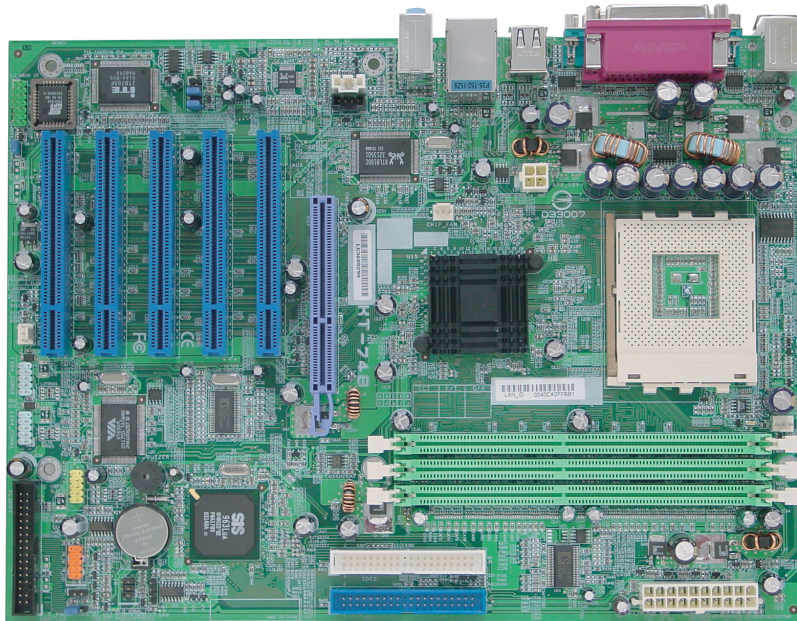

Socket A

Processor

- AMD Athlon™ XP processor 600MHz up to Athlon XP 3000 + or higher.
- AMD Duron™ processor up to 1.3 GHz 400 / 333 / 266 / 200 MHz FSB

Chipsets

- North Bridge: SiS 748
- South Bridge: SiS 963/963L

Memory

- 3 DIMM slot
- PC 3200/2700/2100 DDR SDRAM support.
- SPD support
- Non ECC support
- Max. 3GB total

IDE Interface

- 2 x IDE Connectors Support Ultra DMA ATA 66/100/133

VGA Interface

- 1 x AGP 8X slot

Audio Interface

- AC' 97 codec 5.1 channel Realtek ALC 655

Expansion Slots

- 5 x PCI, 1 x AGP 8X slot

Standard I/O

- 2 x PS2 Connectors.
- 1 x Audio connectors: MIC-In, Line-In, Line-Out
- 2 x COM port
- 1 x (1 x RJ45 + 2 x USB 2.0)
- 1 x Parallel Port
- 1 x (2 x USB 2.0)

System BIOS

- ACPI, APM, DMI, SMBIOS, PnP, USB, PC99, PC2001, Y2K Compliant

LAN*

- Realtek 10/100/ Gb LAN

IEEE 1394*

- VIA 6307 2ports

Form Factor

- ATX - 12" x 8.8"

Key Features

- NOVUS
- Suspend to RAM
- ACPI Ready, RTC Alarm, Intel WfM, (Wake-on-Ring), suspend to RAM
- Auto-Power Failure Recovery, Keyboard/ Mouse Power On
- CD Utilities with enhanced drivers
- Hardware based intelligent anti-virus protection
- HW Monitoring and Hard Disk Fault Prediction

First International Computer, Inc.

Tel: +886-2-87518751 Fax: +886-2-87518783

<http://www.fic.com.tw> E-mail: mkt@fic.com.tw

