

Version 2.0
G52-MA00353

Manual Rev: 2.0
Release Date: April 2001



FCC-B Radio Frequency Interference Statement

This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at his own expense.


Notice 1

The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Notice 2

Shielded interface cables and A.C. power cord, if any, must be used in order to comply with the emission limits.

**VOIR LA NOTICE D'INSTALLATION AVANT DE RACCORDER
AU RESEAU.**

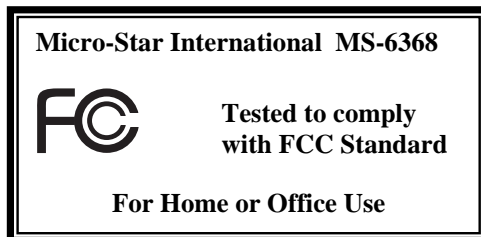

Edition

April 2001

Copyright Notice

The material in this document is the intellectual property of **MICRO-STAR INTERNATIONAL**. We take every care in the preparation of this document, but no guarantee is given as to the correctness of its contents. Our products are under continual improvement and we reserve the right to make changes without notice.

Trademarks

All trademarks used in this manual are the property of their respective owners.

Intel and Pentium are registered trademarks of Intel Corporation.

PS/2 and OS/2 are registered trademarks of IBM Corporation.

Windows 95 and Windows NT are registered trademarks of Microsoft.

Netware is a registered trademark of Novell.

Award is a registered trademark of Award Software Inc.

Revision History

Revision	Revision History	Date
2.0	Add "Front Audio" Change Realtek 8137 to 8100 Modify driver installation	April 2001

Safety Instructions

1. Always read the safety instructions carefully.
2. Keep this User's Manual for future reference.
3. Keep this equipment away from humidity.
4. Lay this equipment on a reliable flat surface before setting it up.
5. The openings on the enclosure are for air convection hence protects the equipment from overheating. **DO NOT COVER THE OPENINGS.**
6. Make sure the voltage of the power source and adjust properly 110/220V before connecting the equipment to the power inlet.
7. Place the power cord such a way that people can not step on it. Do not place anything over the power cord.
8. Always Unplug the Power Cord before inserting any add-on card or module.
9. All cautions and warnings on the equipment should be noted.
10. Never pour any liquid into the opening that could damage or cause electrical shock.
11. If any of the following situations arises, get the equipment checked by a service personnel:
 - The power cord or plug is damaged
 - Liquid has penetrated into the equipment
 - The equipment has been exposed to moisture
 - The equipment has not work well or you can not get it work according to User's Manual.
 - The equipment has dropped and damaged
 - If the equipment has obvious sign of breakage
12. **DO NOT LEAVE THIS EQUIPMENT IN AN ENVIRONMENT UNCONDITIONED, STORAGE TEMPERATURE ABOVE 60⁰ C (140⁰F), IT MAY DAMAGE THE EQUIPMENT.**



CAUTION: Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer.

Contents

Chapter 1. Introduction	1-1
Mainboard Specification	1-2
Mainboard Layout	1-4
Quick Components Guide	1-5
Key Features	1-6
MSI Special Features	1-7
T.O.P Tech™	1-7
PC Alert™ III	1-8
Chapter 2. Hardware Setup	2-1
Central Processing Unit: CPU	2-2
CPU Installation Procedures	2-2
CPU Core Speed Derivation Procedure	2-3
Memory Installation	2-4
Module Installation Procedures	2-5
Power Supply	2-6
ATX 20-Pin Power Supply	2-6
Back Panel	2-7
Mouse Connector	2-7
Keyboard Connector	2-8
USB Connectors	2-8
Parallel Port Connector	2-9
Serial Port Connector: COM 1 & COM 2	2-10
VGA DB 15 Pin Connector	2-10
Joystick/Midi Connectors	2-11
Audio Port Connectors	2-11
LAN Jack (RJ-45)	2-11
Floppy Disk Drive Connector: FDD1	2-12
USB Front Panel Connector: USB2	2-12
Connectors	2-12

Hard Disk Connectors: IDE1 & IDE2	2-13
Case Connector: JFP1	2-14
Power Switch	2-14
Reset Switch	2-14
Power LED	2-14
Speaker	2-14
HDD LED	2-15
Keylock	2-15
Wake On Ring Connector: JMDM1	2-16
Wake On LAN Connector: WOL1	2-16
Fan Power Connectors: CPUFAN/SYSFAN	2-17
CD-In Connector: CD_IN	2-18
Aux Line-In Connector: AUX_IN	2-18
Modem-In Connector: MODEM_IN	2-19
IrDA Infrared Module Connector: JIR1	2-19
Front Panel Audio Connector: FRONT AUDIO	2-20
Jumpers	2-21
Clear CMOS Jumper: JBIOS	2-21
BIOS Flash Jumper: JBIOS1	2-22
USB Keyboard Wake-up Jumpers: JKBUSB & J21	2-23
Slots	2-24
PCI Slots	2-24
CNR (Communication Network Riser) Slot	2-24
ISA Slot (Optional)	2-24
PCI Interrupt Request Routing	2-25
Chapter 3. AWARD® BIOS Setup	3-1
Entering Setup	3-2
Control Keys	3-2
Getting Help	3-3
The Main Menu	3-4

Standard CMOS Features	3-6
Advanced BIOS Features	3-9
Advanced Chipset Features	3-13
Integrated Peripherals	3-18
Power Management Setup	3-23
PnP/PCI Configurations	3-29
PC Health Status	3-31
Frequency/Voltage Control	3-32
Load Fail-Safe/Optimized Defaults	3-33
Set Supervisor/User Password	3-35
Save & Exit Setup	3-37
Exit Without Saving	3-38
Chapter 4. Installing Drivers	4-1
Overview	4-2
Driver Installation for Windows® 98SE	4-3
Driver Installation for Windows® 2000	4-5
Driver Installation for Windows® ME	4-7
Driver Installation for Windows® NT4.0	4-9
Realtek® 8100 Fast Ethernet Controller	4-11
Features	4-11
Driver Installation	4-11
Glossary	I

Introduction

1

The MS-6368 (v2.X) Micro-ATX mainboard is a high-performance computer mainboard based on VIA Apollo PLE133 (ProMedia II) chipset and designed for the Intel® Celeron™ or Pentium !!! (FC-PGA) processor for inexpensive business/personal desktop markets.

The Apollo PLE133 chipset consists of the VT8601A North Bridge controller and the VT82C686B South Bridge controller. The VT8601A integrates rich AGP4X graphics capabilities for 2D/3D software and internet multimedia applications. It supports Intel® Pentium !!!, Celeron™ and VIA Cyrix® III running at a variety of FSB frequencies from 66 to 133 MHz; and provides bandwidth and performance for internet and 3D graphics needs by supporting advanced memory technologies PC133 SDRAM and VC133 RAM (Virtual Channel RAM) up to 1.0GB.

The VIA® VT82C686B Super I/O PCI integrated Peripheral Controller (PSIPC) includes PCI-to-ISA bridge controller, 10/100 BaseT Ethernet controller, AC'97 audio and MC'97 modem (for CNR slot). In addition, it supports dual bus-master IDE with Ultra DMA 33/66/100, four USB ports, system hardware monitoring and enhanced power management capabilities.

The Apollo PLE133 chipset allows the MS-6368 mainboard to meet specific needs of internet multimedia and 3D graphics applications.

This chapter includes the following topics:

Mainboard Specifications	1-2
Mainboard Layout	1-4
Quick Components Guide	1-5
Key Features	1-6
MSI Special Features	1-7

Chapter 1

Mainboard Specification

CPU

- Support Socket 370 for Intel® Celeron™ /Pentium !!! (FC-PGA) processor and VIA Cyrix® III processor
- Support CPU frequencies at 333/350/400/450/500/533/550/667/700/750/800/850/933/950MHz, 1GHz and up to 1.1GHz

Chipset

- VIA® VT8601A chipset (510 BGA)
 - FSB @133MHz
 - Integrated Trident Blade 2D/3D video accelerator
 - PCI advanced high performance memory controller
 - Support PC100/133 SDRAM, VCM & ESDRAM technology
- VIA® VT686B chipset (352 BGA)
 - Enhanced Power Management Features
 - Integrated Super I/O (FDC, LPT, COM 1/2 and IR)
 - Dual bus Master IDE Ultra DMA 33/66/100
 - Integrated Hardware Soundblaster
 - Direct Sound AC97 Audio
 - ACPI

Clock Generator

- 66.6MHz, 100MHz, and 133MHz clocks are supported.

Main Memory

- Support four memory banks using 168-pin unbuffered DIMM
- Support a maximum memory size of 1GB (32M x 8)
- Support 3.3V SDRAM DIMM

Slots

- One CNR (Communication Network Riser) slot
- Three 32-bit Master PCI Bus slots
- Support 3.3V/5V PCI bus Interface
- One ISA slot (optional)

On-Board IDE

- An IDE controller on the VIA® VT82C686B chipset provides IDE HDD/

CD-ROM with PIO, Bus Master and Ultra DMA 33/66/100 operation modes

- Can connect up to four IDE devices

Audio

- Audio controller integrated in 686B chipset
- Software audio codec VT1611A
 - Onboard Front Audio Pin Header

Network

- Realtek 8100 (optional)

On-Board Peripherals

- On-Board Peripherals include:
 - 1 floppy port supports 2 FDDs with 360K, 720K, 1.2M, 1.44M and 2.88Mbytes
 - 2 serial ports (COM 1 + COM 2)
 - 1 parallel port supporting SPP/EPP/ECP mode
 - 4 USB ports (2 rear connectors/2 from USB front pin header)
 - 1 IrDA connector for SIR/CIR/FIR/ASKIR/HPSIR
 - 1 VGA port
 - 1 Audio/Game port

BIOS

- The mainboard BIOS provides “Plug & Play” BIOS which detects the peripheral devices and expansion cards of the board automatically.
- The mainboard provides a Desktop Management Interface (DMI) function which records your mainboard specifications.

Dimension


- Micro-ATX Form Factor: 24.3cm (L) x 20.5cm (W)

Mounting

- 6 mounting holes

Chapter 1

Mainboard Layout

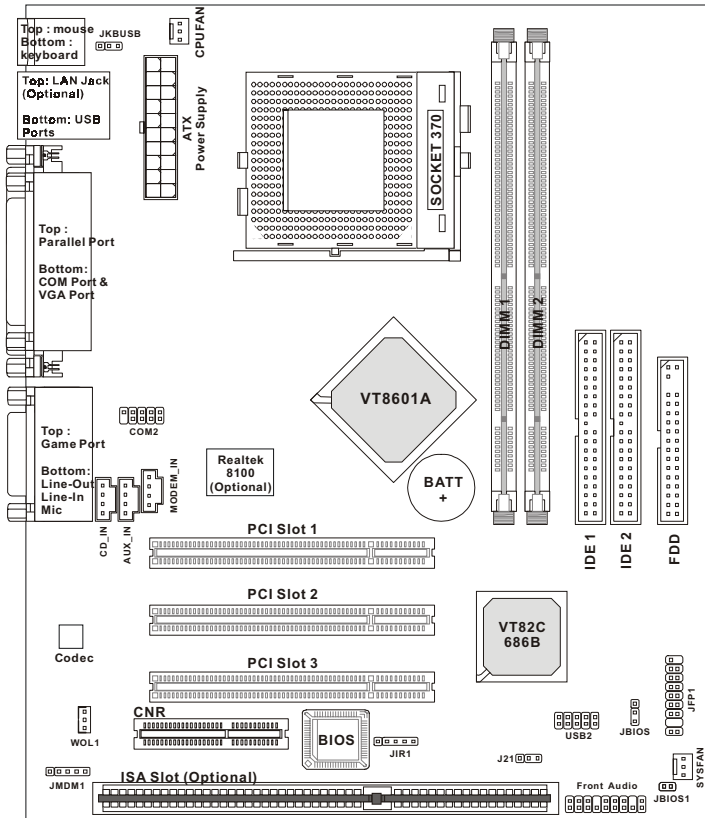

MS-6368 (v2.X) Micro-ATX VA Mainboard

Quick Components Guide

Component	Function	Reference
DIMM 1~2	Installing memory modules	See p. 2-4~2-5
Socket 370	Installing CPU	See p. 2-2~2-3
CPUFAN	Connecting to CPUFAN	See p. 2-17
SYSFAN	Connecting to SYSFAN	See p. 2-17
ATX Power Supply	Installing power supply	See p. 2-6
IDE1& IDE2	Connecting to IDE hard disk drive	See p.2-13
FDD1	Connecting to floppy disk drive	See p.2-12
USB2	Connecting to USB interfaces	See p. 2-12
PCI Slot 1~3	Installing expansion cards	See p. 2-24
ISA Slot	Installing ISA cards	See p. 2-24
CNR Slot	Installing expansion cards	See p. 2-24
JFP1	Connecting to the case	See p. 2-14
JMDM1	Connecting to a modem card	See p. 2-16
WOL1	Connecting to an LAN card	See p. 2-16
JIR1	Connecting to IrDA infrared module	See p. 2-19
JBIOS	Clearing CMOS data	See p. 2-21
JKBUSB & J21	Setting keyboard wake-up function	See p. 2-23
JBIOS1	Setting BIOS flash function	See p. 2-22
Front Audio	Connecting to an Audio connector	See p. 2-20

Chapter 1

Key Features

- Microsoft® PC99 compliant
- T.O.P Tech™ - Thermal Overheat Protection Technology
- PC Alert™ III system hardware monitor
- CPU: Socket 370 for Intel® Celeron™/Pentium !!! Processor
- Micro-ATX Form Factor
- Clock: 66.6/100/133MHz
- Audio integrated in chipset
- Memory: 2 SDRAM DIMMs
- LAN Wake up Function
- Modem (External/Internal) Ring Wake up Function
- I/O: 2 serial ports (COM2 is the onboard pin header), 1 parallel port, 4 USB ports, 1 floppy port, 1 IrDA connector, 1 Audio/Game port, 1 VGA port
- Slot: 1 CNR slot, 3 PCI slots, 1 ISA slot (optional)

MSI Special Features

T.O.P Tech™

The T.O.P Tech™ is an extended sensing device that can 100% accurately detect the CPU's temperature. You can find out the temperature on BIOS setup menu. The PC Alert™ also provides the information.



CPU temperature on Setup menu

CMOS Setup Utility - Copyright(C) 1984-2000 Award Software
PC Health Status

CurrentCPUTemp.	58°C/132°F	ItemHelp	
CurrentSystemTemp.	23°C/73°F	Menu Level ▶	
CurrentCPUFAN Speed	4200RPM		
CurrentSystemFanSpeed	4560RPM		
Vcore	1.66V		
2.5V	2.41V		
3.3V	3.30V		
5V	5.02V		
12V	12.05V		
↑↓→←:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5:Previous Values F6:Fail-Safe Defaults F7:Optimized Defaults			


Chapter 1

PC Alert™ III

The PC Alert™ III is a utility you can find in the CD-ROM. The utility is just like your PC doctor that can detect the following PC hardware status during real time operation:

- * monitor CPU & system temperature
- * monitor fan speed
- * monitor system voltage
- * monitor chassis intrusion

If one of the items above is abnormal, the program main screen will be immediately shown on the screen, with the abnormal item highlighted in red. This will continue to be shown until user disables the warning.

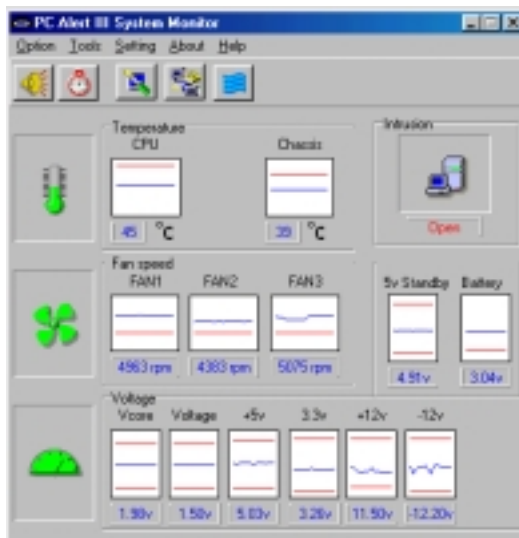

Note: Items shown on PC Alert III vary depending on your system's status.

Hardware Setup

2

This chapter provides you with the information about hardware setup procedures. While doing the installation, be careful in holding the components and follow the installation procedures. For some components, if you install them in the wrong orientation, the components will not work properly.

Use a grounded wrist strap before handling computer components. Static electricity may damage the components.

This chapter contains the following topics:

Central Processing Unit (CPU)	2-2
Memory Installation	2-4
Power Supply	2-6
Back Panel	2-7
Connectors	2-12
Jumpers	2-21
Slots	2-24


Chapter 2

Central Processing Unit: CPU


The mainboard supports Intel® Celeron™ and Pentium !!! processor. The mainboard uses a CPU socket called Socket 370 for easy CPU installation. Make sure the CPU has a Heat Sink and a cooling fan attached on top to prevent overheating. If you do not find the Heat Sink and cooling fan, contact your dealer to purchase and install them before turning on the computer.

CPU Installation Procedures


1. Pull the lever sideways away from the socket. Then, raise the lever up to a 90-degree angle.



2. Look for the gold arrow. The gold arrow should point towards the end of lever. The CPU will only fit in the correct orientation.



3. Hold the CPU down firmly, and then close the lever to complete the installation.



WARNING!

Overheating will seriously damage the CPU and system, always make sure the cooling fan can work properly to protect the CPU from overheating.

CPU Core Speed Derivation Procedure


The mainboard can automatically set the CPU Host Bus Frequency Clock.

If	CPU Clock	=	100MHz
	Core/Bus ratio	=	7
then	CPU core speed	=	Host Clock x Core/Bus ratio
		=	100MHz x 7
		=	700MHz

Chapter 2

Memory Installation

The mainboard provides 2 slots for 168-pin, 3.3V SDRM DIMM with 4 memory banks. To operate properly, at least one DIMM module must be installed.

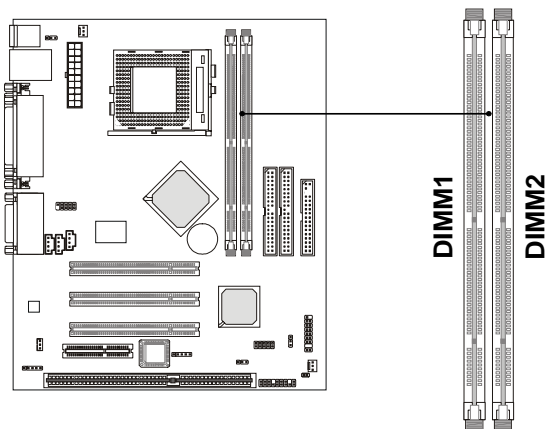


The SDRAM Addressing & Size


DRAM Tech.	DRAM Density & Width	DRAM Addressing	Address Size		MB/DIMM	
			Row	Column	Single no. Side(S) pcs.	Double no. Side(D) pcs.
16M	1Mx16	ASYM	11	8	8MBx4	16MBx8
	2Mx8	ASYM	11	9	16MBx8	32MBx16
	4Mx4	ASYM	11	10	32MB	64MB
64M	2Mx32	ASYM	11	9	32MBx2	64MBx4
	2Mx32	ASYM	12	8	16MBx2	32MBx4
	4Mx16	ASYM	11	10	32MB	64MB
	4Mx16	ASYM	13	8	32MB	64MB
	8Mx8	ASYM	13	9	64MB	128MB
	16Mx4	ASYM	13	10	128MB	256MB
64M	2Mx32	ASYM	12	8	16MB	32MB
	4Mx16	ASYM	13	8	32MB	64MB
	8Mx8	ASYM	13	9	64MB	128MB
	16Mx4	ASYM	13	10	128MB	256MB

Module Installation Procedures

You can install single sided or double sided 168-pin DIMMs into DIMM slots according to your needs.

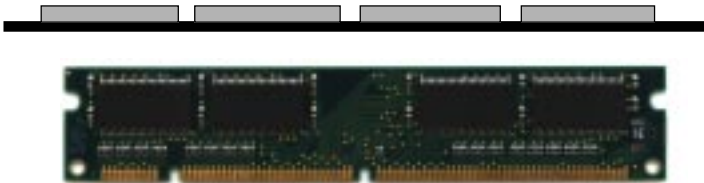


Single Sided DIMM

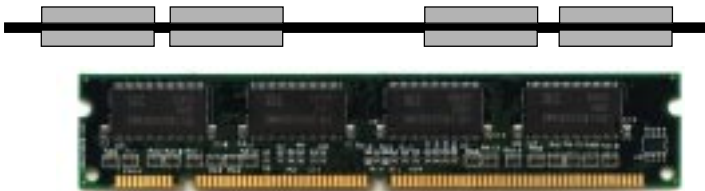

Double Sided DIMM

1. The DIMM slot has 2 Notch Keys “VOLT and DRAM”, so the DIMM memory module can only fit in one direction.
2. Insert the DIMM memory module vertically into the DIMM slot. Then push it in.

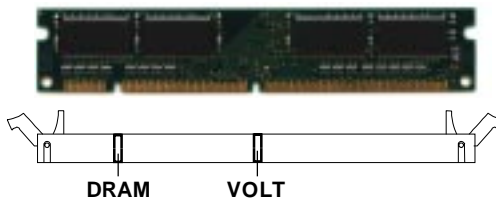

3. The plastic clips at sides of the DIMM slot will automatically close.


Chapter 2

Power Supply

The mainboard supports ATX power supply for the power system. Before connecting to the power supply, always make sure that all components are installed properly and no damage will be caused.

ATX 20-Pin Power Supply


This connector allows you to connect to an ATX power supply. To connect to the ATX power supply, make sure the power supply connector is installed in the right orientation and the pins are aligned. Then push down the power supply connector firmly into the power connector on the mainboard.

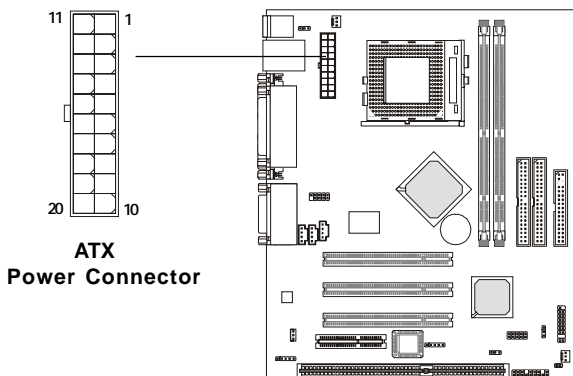

PIN	SIGNAL	PIN	SIGNAL
1	3.3V	11	3.3V
2	3.3V	12	-12V
3	GND	13	GND
4	5V	14	PS_ON
5	GND	15	GND
6	5V	16	GND
7	GND	17	GND
8	PW_OK	18	-5V
9	5V_SB	19	5V
10	12V	20	5V

Back Panel

The Back Panel provides the following connectors:

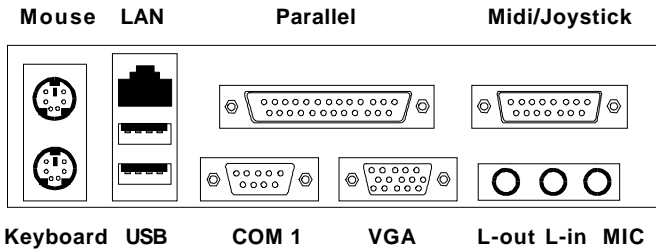

Mouse Connector

The mainboard provides a standard PS/2[®] mouse mini DIN connector for attaching a PS/2[®] mouse. You can plug a PS/2[®] mouse directly into this connector.


PS/2 Mouse (6-pin Female)

Pin Definition		
PIN	SIGNAL	DESCRIPTION
1	Mouse DATA	Mouse DATA
2	NC	No connection
3	GND	Ground
4	VCC	+5V
5	Mouse Clock	Mouse clock
6	NC	No connection

Chapter 2

Keyboard Connector

The mainboard provides a standard PS/2® keyboard mini DIN connector for attaching a PS/2® keyboard. You can plug a PS/2® keyboard directly into this connector.




PS/2 Keyboard (6-pin Female)

Pin Definition

PIN	SIGNAL	DESCRIPTION
1	Keyboard DATA	Keyboard DATA
2	NC	No connection
3	GND	Ground
4	VCC	+5V
5	Keyboard Clock	Keyboard clock
6	NC	No connection

USB Connectors

The mainboard provides a UHCI (Universal Host Controller Interface) Universal Serial Bus root for attaching USB devices such as keyboard, mouse or other USB-compatible devices. You can plug the USB device directly into the connector.




USB Ports

USB Port Description

PIN	SIGNAL	DESCRIPTION
1	VCC	+5V
2	-Data 0	Negative Data Channel 0
3	+Data0	Positive Data Channel 0
4	GND	Ground
5	VCC	+5V
6	-Data 1	Negative Data Channel 1
7	+Data 1	Positive Data Channel 1
8	GND	Ground

Parallel Port Connector

The mainboard provides a 25-pin female centronic connector for LPT. A parallel port is a standard printer port that supports Enhanced Parallel Port (EPP) and Extended Capabilities Parallel Port (ECP) mode.

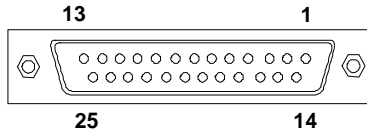



Pin Definition

PIN	SIGNAL	DESCRIPTION
1	STROBE	Strobe
2	DATA0	Data0
3	DATA1	Data1
4	DATA2	Data2
5	DATA3	Data3
6	DATA4	Data4
7	DATA5	Data5
8	DATA6	Data6
9	DATA7	Data7
10	ACK#	Acknowledge
11	BUSY	Busy
12	FE	Paper End
13	SELECT	Select
14	AUTO FEED#	Automatic Feed
15	ERR#	Error
16	INIT#	Initialize Printer
17	SLIN#	Select In
18	GND	Ground
19	GND	Ground
20	GND	Ground
21	GND	Ground
22	GND	Ground
23	GND	Ground
24	GND	Ground
25	GND	Ground1

Chapter 2

Serial Port Connector: COM 1 & COM 2

The mainboard has one 9-pin male DIN connector serial port COM 1 and one 9-pin COM 2 pin header. You can attach a serial mouse or other serial devices to the connectors.




Pin Definition

PIN	SIGNAL	DESCRIPTION
1	DCD	Data Carry Detect
2	SIN	Serial In or Receive Data
3	SOUT	Serial Out or Transmit Data
4	DTR	Data Terminal Ready)
5	GND	Ground
6	DSR	Data Set Ready
7	RTS	Request To Send
8	CTS	Clear To Send
9	RI	Ring Indicate

VGA DB 15 Pin Connector

The mainboard provides one DB 15-pin female connector to connect a VGA monitor.




Pin Definition

Analog Video Display Connector (DB-15S)	
PIN	SIGNAL DESCRIPTION
1	Red
2	Green
3	Blue
4	Not used
5	Ground
6	Ground
7	Ground
8	Ground
9	Power
10	Ground
11	Not used
12	SDA
13	Horizontal Sync
14	Vertical Sync
15	SCL


Joystick/Midi Connectors

You can connect a joystick or game pad to this connector.



Audio Port Connectors

Line Out is to connect speakers or headphones. **Line In** is a connector for external CD player, Tape player or other audio devices. **Mic** is used to connect to a microphone.



LAN Jack (RJ-45)

The mainboard provides one standard RJ-45 jack for connection to Local Area Network (LAN). You can connect a network cable to the LAN jack.



LAN RJ-45 Jack

Pin Definition

PIN	SIGNAL	DESCRIPTION
1	TDP	Transmit Differential Pair
2	TDN	Transmit Differential Pair
3	RDP	Receive Differential Pair
4	NC	Not Used
5	NC	Not Used
6	RDN	Receive Differential Pair
7	NC	Not Used
8	NC	Not Used


Chapter 2

Connectors

The mainboard provides connectors to connect to FDD, IDE HDD, IDE RAID HDD, case, modem, LAN, USB Ports, IR module and CPU/Power Supply/System FAN.


Floppy Disk Drive Connector: FDD1

The mainboard provides a standard floppy disk drive connector that supports 360K, 720K, 1.2M, 1.44M and 2.88M floppy disk types.

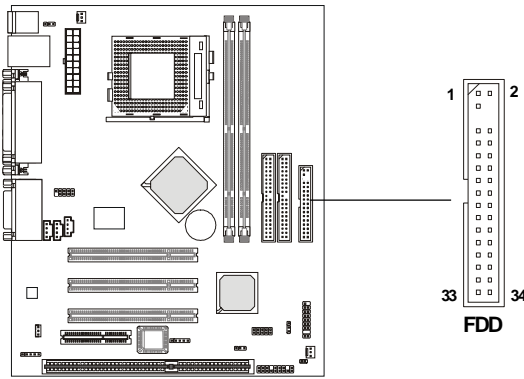

USB Front Panel Connector: USB2

The mainboard provides one Front USB (Universal Serial Bus) pin header that allows you to connect two optional USB ports for Front Panel.

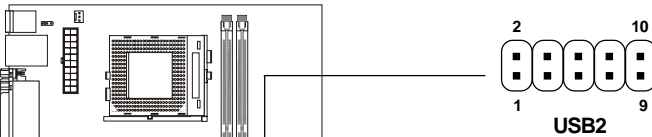

Pin Definition

Pin	Description	Pin	Description
1	VCC/5VSB	2	GND
3	USBD0-	4	GND
5	USBD0+	6	USBD1+
7	GND	8	USBD1-
9	GND	10	VCC/5VSB

Hard Disk Connectors: IDE1 & IDE2


The mainboard uses an IDE controller on the VIA® VT82C686B chipset that provides PIO mode 0-4, Bus Master, and Ultra DMA 33/66/100 modes. It has two HDD connectors IDE1 (Primary) and IDE2 (Secondary). You can connect up to four hard disk drives, CD-ROM or 120MB Floppy to IDE1 and IDE2.

IDE1 (Primary IDE Connector)

- The first hard disk drive should always be connected to IDE1. You can connect a Master and a Slave drive to IDE1.

IDE2 (Secondary IDE Connector)

- You can connect a Master and a Slave drive to IDE2.

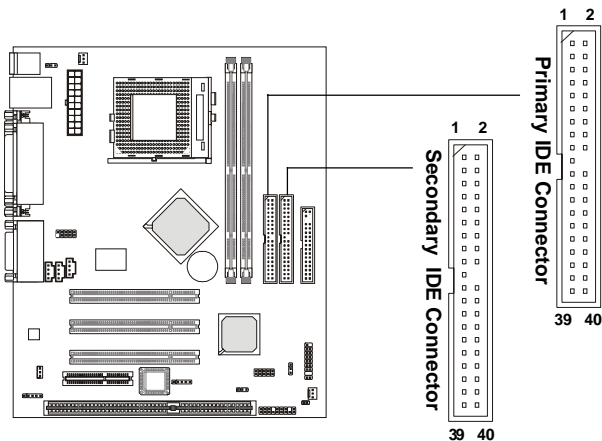


TIP:

If you install two hard disks on cable, you must configure the second drive to Slave mode by setting its jumper. Refer to the hard disk documentation supplied by hard disk vendors for jumper setting instructions.

Chapter 2

Case Connector: JFP1

The case connector block JFP1 allows you to connect to the Power Switch, Reset Switch, Keylock, Speaker, Power LED, and HDD LED on the case.

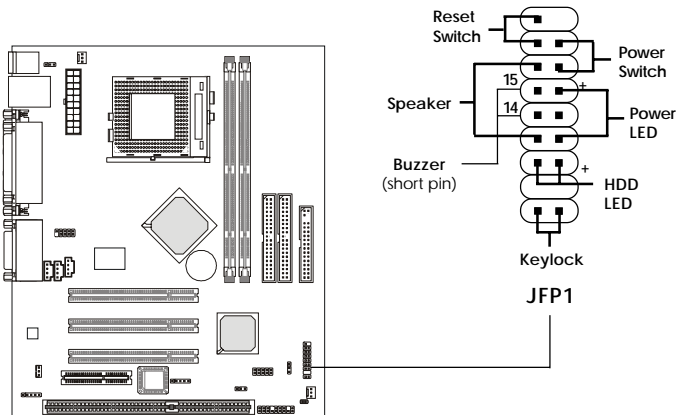

Power Switch

Connect to a 2-pin push button switch. Pressing this button can turn the system power on or off.

Reset Switch

Reset switch is used to reboot the system rather than turning the power ON/OFF. Avoid rebooting while the HDD is working. You can connect the Reset switch from the system case to this pin.

Power LED

The Power LED is lit while the system power is on. Connect the Power LED from the system case to this pin.

Speaker

Speaker from the system case is connected to this pin.

If on-board Buzzer is available, then:

Short pin 14-15: On-board Buzzer Enabled.

Open pin 14-15: On-board Buzzer Disabled.

HDD LED

HDD LED shows the activity of a hard disk drive. Avoid turning the power off while the HDD is working. You can connect the HDD LED from the system case to this pin.


Keylock

Keylock allows you to disable the keyboard for security purpose. You can connect the keylock to this connector.

Chapter 2


Wake On Ring Connector: JMDM1

This connector allows you to connect to a modem card with Wake On Ring function. The connector will power up the system when a signal is received through the modem card.

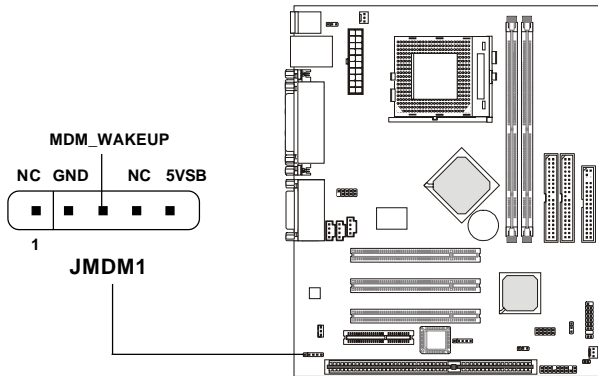


Wake On LAN Connector: WOL1

This connector allows you to connect to a LAN card with Wake On LAN function. You can wake up the computer via remote control through a local area network.

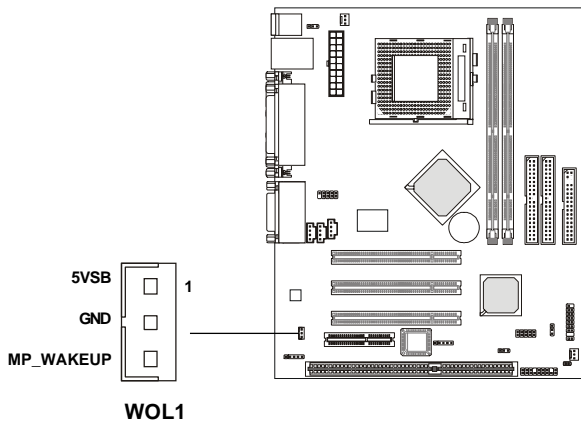

Fan Power Connectors: CPUFAN/SYSFAN

The CPUFAN (processor fan) and SYSFAN (system fan) support system cooling fan with +12V. It supports three-pin head connector. When connecting the wire to the connectors, always take note that the red wire is the positive and should be connected to the +12V, the black wire is Ground and should be connected to GND. If the mainboard has a System Hardware Monitor chipset on-board, you must use a specially designed fan with speed sensor to take advantage of the CPU fan control.

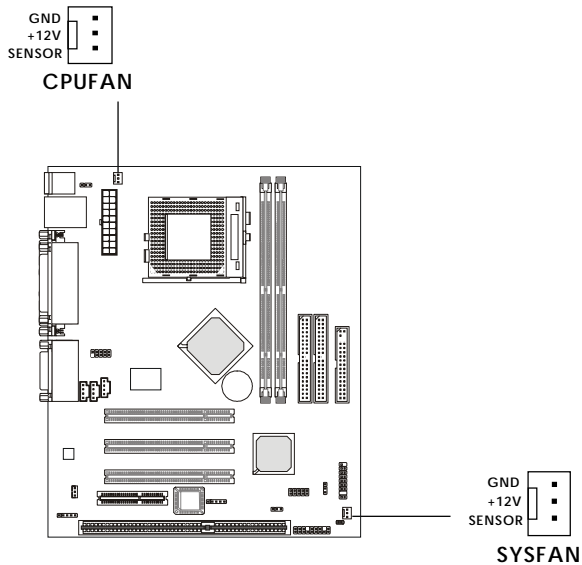


Note:

1. Always consult the vendor for proper CPU cooling fan.
2. CPU Fan supports the fan control. You can install the PC Alert utility that will automatically control the CPU Fan speed according to the actual CPU temperature.

Chapter 2


CD-In Connector: CD_IN

The connector is for CD-ROM audio connector.

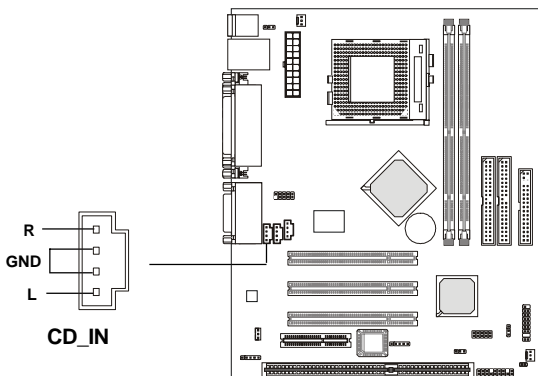


Aux Line-In Connector: AUX_IN

The connector is for DVD add-on card with Line-in connector.

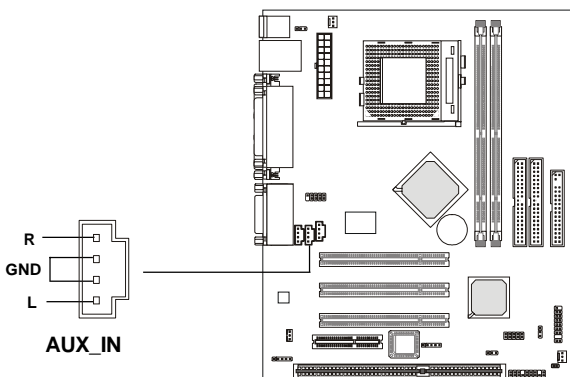


Modem-In Connector: MODEM_IN

The connector is for modem with internal audio connector.

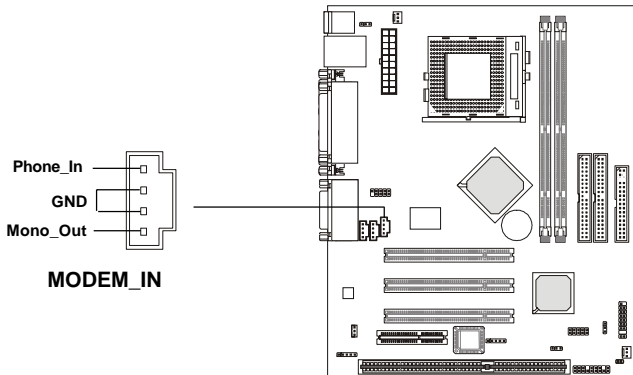

IrDA Infrared Module Connector: JIR1


This connector allows you to connect an IrDA Infrared module. You must configure the setting through the BIOS setup to use the IR function.

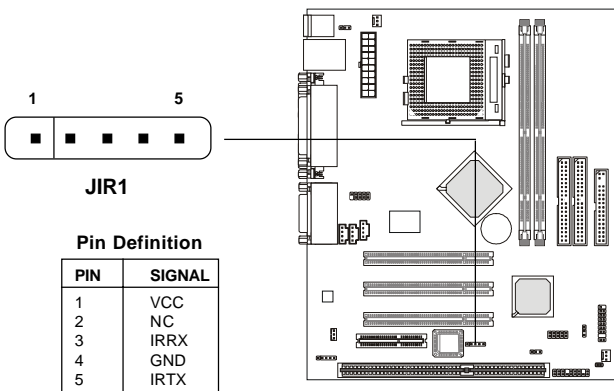

Chapter 2

Front Panel Audio Connector: FRONT AUDIO

You can connect an optional audio connector to the Front Panel Audio Header.

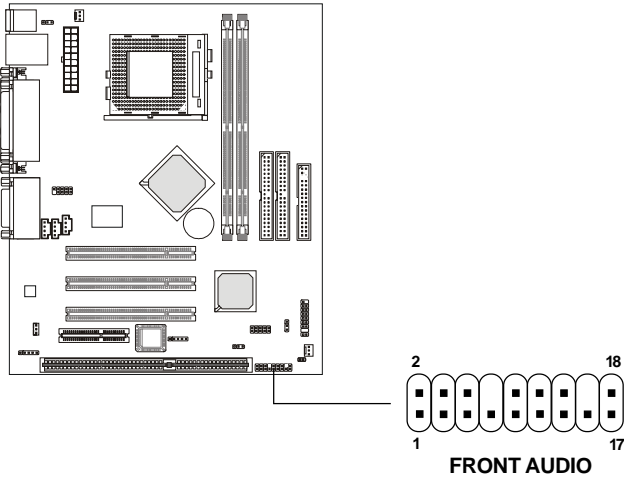


PIN	Description	PIN	Description
1	Active Line Out (R)	2	Active Line Out (L)
3	GND (ALO)	4	GND (ALO)
5	GND (+12)	6	GND (+12)
7	+12V (1A)	8	(Cut)
9	MIC	10	GND (MIC)
11	Front Line Out (R)	12	Line Next (R)
13	Front Line Out (L)	14	Line Next (L)
15	GND (FLO)	16	(Cut)
17	Line In (R)	18	Line In (L)


Jumpers

The motherboard provides the following jumpers for you to set the computer's function. This section describes how to change your motherboard's function through the use of jumpers.

Clear CMOS Jumper: JBIOS

There is a CMOS RAM on board that has a power supply from external battery to keep the data of system configuration. With the CMOS RAM, the system can automatically boot OS every time it is turned on. The battery has long life time for at least 5 years. If you want to clear the system configuration stored in the CMOS RAM, use the JBIOS (Clear CMOS Jumper) to clear data. Follow the instructions below to clear the data:

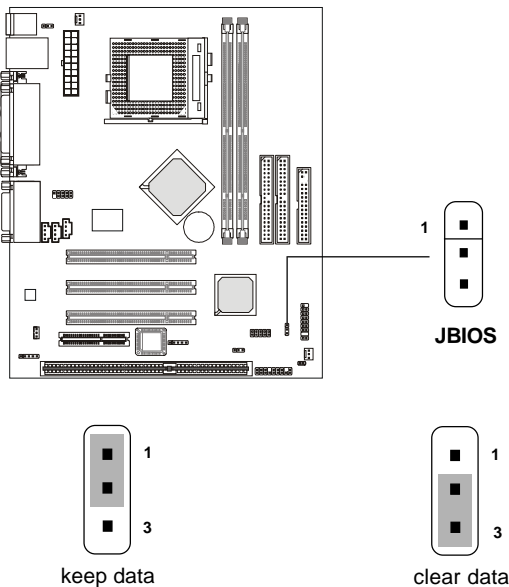




WARNING! You can clear CMOS by shorting 2-3 pin while the system is off. Then return to 1-2 pin position. Avoid clearing the CMOS while the system is on; it will damage the mainboard.

Chapter 2

BIOS Flash Jumper: JBIOS1

This jumper is used to lock or unlock the boot block area on BIOS. When unlocked, the BIOS boot block area can be updated. When locked, the BIOS boot block area can not be updated.

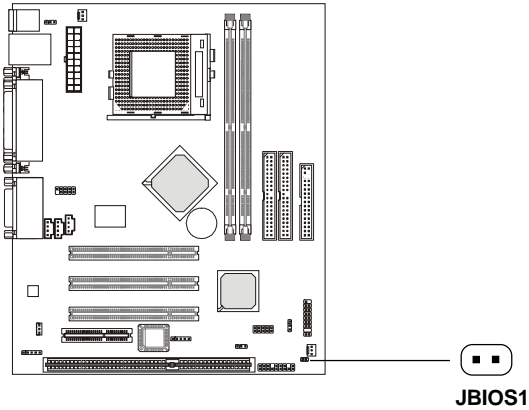


**BIOS Flash Locked
(Write Protect)**



BIOS Flash Unlocked

USB Keyboard Wake-up Jumpers: JKBUSB & J21

The JKBUSB/J21 jumpers are used to set USB keyboard wake-up function. (Please note JKBUSB is for USB rear ports and J21 is for USB front pin header: USB2) To use the function, you should also go to BIOS to enable the USB keyboard wake-up (power on) function.

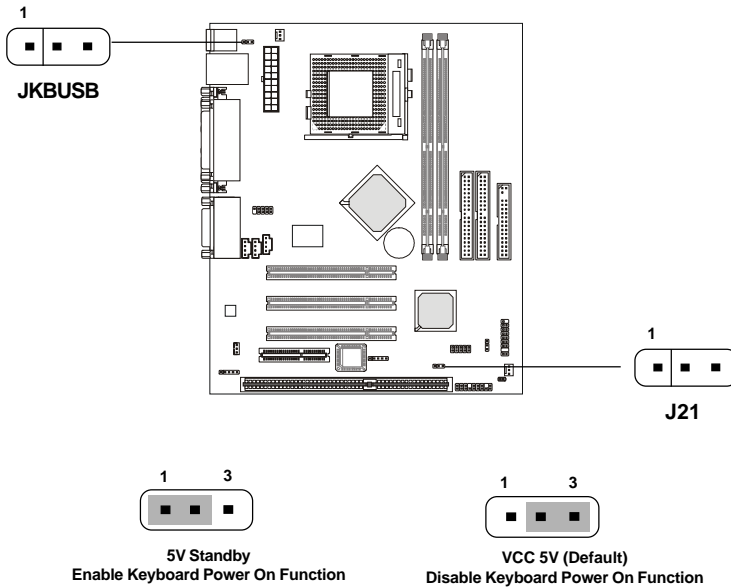


Note: To be able to use this function, you need a power supply that provides enough power for this feature. (Power supply with 750mA 5V Stand-by)

Chapter 2

Slots

The motherboard provides three 32-bit Master PCI Bus Slots, one CNR and one optional ISA slot.

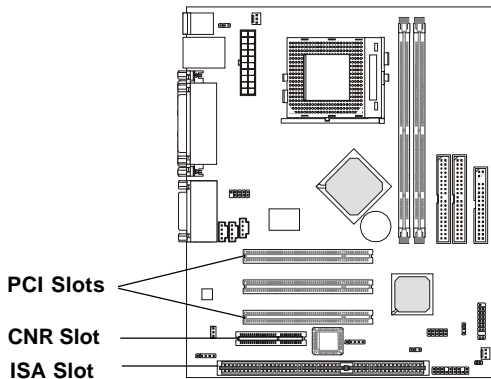

PCI Slots

Three PCI slots allow you to install expansion cards to meet your needs. When adding or removing expansion cards, make sure that you unplug the power supply first. Meanwhile, read the documentation for the expansion card to make any necessary hardware or software settings for the expansion card, such as jumpers, switches or BIOS configuration.

CNR (Communication Network Riser) Slot

The CNR specification is an open industry-standard specification that defines a hardware scalable Original Equipment Manufacturer (OEM) main-board riser board and interface, which supports audio and modem only.

ISA Slot (Optional)

This slot allows you to install ISA expansion card.

PCI Interrupt Request Routing

The IRQ, abbreviation of interrupt request line and pronounced I-R-Q, are hardware lines over which devices can send interrupt signals to the microprocessor. The PCI/USB/AC97 IRQ pins are typically connected to the PCI bus INTA#-INTD# pins as follows:

	Order 1	Order 2	Order 3	Order 4
PCI Slot 1	INT A#	INT B#	INT C#	INT D#
PCI Slot 2	INT B#	INT C#	INT D#	INT A#
PCI Slot 3	INT C#	INT D#	INT A#	INT B#
USB-1	INT D#	INT A#	INT B#	INT C#
USB-2	INT D#	INT A#	INT B#	INT C#
AC97	INT C#	INT D#	INT A#	INT B#

PCI Slot 3 & AC97 codec shared.

PCI Slot 1-3: Bus Master.

AWARD® BIOS Setup**3**

The mainboard uses AWARD® BIOS ROM that provides a Setup utility for users to modify the basic system configuration. The information is stored in a battery-backed CMOS RAM so it retains the Setup information when the power is turned off.

This chapter provides you with the overview of the BIOS Setup program. It contains the following topics:

Entering Setup	3-2
Control Keys	3-2
Getting Help	3-3
The Main Menu	3-4
Standard CMOS Feature	3-6
Advanced BIOS Features	3-9
Advanced Chipset Features	3-13
Integrated Peripherals	3-18
Power Management Setup	3-23
PnP/PCI Configurations	3-29
PC Health Status	3-31
Frequency/Voltage Control	3-32
Load Fail-Safe/Optimized Defaults	3-33
Set Supervisor/User Password	3-35
Save & Exit Setup	3-37
Exit Without Saving	3-38

Chapter 3

Entering Setup

Power on the computer and the system will start POST (Power On Self Test) process. When the message below appears on the screen, press key to enter Setup.

Hit DEL if you want to run SETUP

If the message disappears before you respond and you still wish to enter Setup, restart the system by turning it OFF and On or pressing the RESET button. You may also restart the system by simultaneously pressing <Ctrl>, <Alt>, and <Delete> keys.

Control Keys

<↑>	Move to the previous item
<↓>	Move to the next item
<←>	Move to the item in the left hand
<→>	Move to the item in the right hand
<Enter>	Select the item
<Esc>	Jumps to the Exit menu or returns to the main menu from a submenu
<+/PU>	Increase the numeric value or make changes
<-/PD>	Decrease the numeric value or make changes
<F1>	General help, only for Status Page Setup Menu and Option Page Setup Menu
<F5>	Restore the previous CMOS value from CMOS, only for Option Page Setup Menu
<F6>	Load the default CMOS value from Fail-Safe default table, only for Option Page Setup Menu
<F7>	Load Optimized defaults
<F10>	Save all the CMOS changes and exit

Getting Help

After entering the Setup utility, the first screen you see is the Main Menu.

Main Menu

The main menu displays the setup categories the BIOS supplies. You can use the arrow keys (↑↓) to select the item. The on-line description for the selected setup category is displayed on the bottom of the screen.

Sub-Menu

If you find a right pointer symbol appears to the left of certain fields (as shown in the right view), that means a sub-menu containing additional options for the field can be launched from this field. To enter the sub-menu, highlight the field and press <Enter>. Then you can use control keys to move between and change the settings of the sub-menu. To return to the main menu, press <Esc>.

- ▶ IDE Primary Master
- ▶ IDE Primary Slave
- ▶ IDE Secondary Master
- ▶ IDE Secondary Slave

General Help <F1>

The BIOS setup program provides a General Help screen. You can call up this screen from any menu by simply pressing <F1>. The Help screen lists the appropriate keys to use and the possible selections for the highlighted item. Press <Esc> to exit the Help screen.

Chapter 3

The Main Menu

Once you enter AWARD® BIOS CMOS Setup Utility, the Main Menu will appear on the screen. The Main Menu displays eleven configurable functions and two exit choices. Use arrow keys to move among the items and press <Enter> to enter the sub-menu.

CMOS Setup Utility - Copyright (C) 1984-2000 Award Software

▶ Standard CMOS Features	▶ Frequency/Voltage Control
▶ Advanced BIOS Features	Load Fail-Safe Defaults
▶ Advanced Chipset Features	Load Optimized Defaults
▶ Integrated Peripherals	Set Supervisor Password
▶ Power Management Setup	Set User Password
▶ PnP/PCI Configurations	Save & Exit Setup
▶ PC Health Status	Exit Without Saving
ESC : Quit F9 : Menu in BIOS ↑↓←→ : Select Item	
F10 : Save & Exit Setup	
Time, Date, Hard Disk Type...	

Standard CMOS Features

Use this menu for basic system configurations, such as time, date etc.

Advanced BIOS Features

Use this menu to setup the items of Award® special enhanced features.

Advanced Chipset Features

Use this menu to change the values in the chipset registers and optimize your system's performance.

Integrated Peripherals

Use this menu to specify your settings for integrated peripherals.

Power Management Setup

Use this menu to specify your settings for power management.

PnP/PCI Configurations

This entry appears if your system supports PnP/PCI.

PC Health Status

This entry displays the current status of your PC.

Frequency/Voltage Control

Use this menu to specify your settings for frequency/voltage control.

Load Fail-Safe Defaults

Use this menu to load the BIOS default values for the minimal/stable performance of your PC.

Load Optimized Defaults

Use this menu to load the default factory settings for BIOS for optimal system performance.

Supervisor Password

Use this menu to set Supervisor Password.

User Password

Use this menu to set User Password.

Save & Exit Setup

Save changes to CMOS and exit setup.

Exit Without Saving

Abandon all changes and exit setup.

Chapter 3

Standard CMOS Features

The items inside Standard CMOS Features menu are divided into 13 categories. Each category includes none, one or more setup items. Use the arrow keys to highlight the item you want to modify and use the <PgUp> or <PgDn> keys to switch to the value you prefer.

CMOS Setup Utility - Copyright(C) 1984-2000 Award Software
Standard CMOS Features

Date (mm:dd:yy): Time (hh:mm:ss):	Tue, Apr 10 2001 00:00:00	Item Help
▶ IDE Primary Master ▶ IDE Primary Slave ▶ IDE Secondary Master ▶ IDE Secondary Slave		Menu Level ▶ Change the day, month, year and century
Drive A Drive B	1.44 M, 3.5 in. None	
Video Halt On	EGA/VGA All, But Keyboard	
Base Memory Extended Memory Total Memory	640K 65472K 66112K	
↑ ↓ → ← : Move Enter: Select +/-/PU/PD: Value F10: Save ESC: Exit F1: General Help F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults		

Date

This allows you to set the system to the date that you want (usually the current date). The format is <day><month> <date> <year>.

day Day of the week, from Sun to Sat, determined by BIOS. Read-only.

month The month from Jan. through Dec.

date The date from 1 to 31 can be keyed by numeric function keys.

year The year depends on the year of the BIOS.

Time

This allows you to set the system time that you want (usually the current time). The time format is <hour> <minute> <second>.

IDE Primary Master/Primary Slave/Secondary Master/Secondary Slave

Press PgUp/<+> or PgDn/<-> to select the hard disk drive type. The specification of hard disk drive will show up on the right hand according to your selection.

IDE Primary Master		Item Help
IDE HDD Auto-Detection	Press Enter	
IDE Primary Master Access Mode	Auto	Menu Level ▶▶
Capacity	15021MB	To auto-detect the HDD's size, head...on this channel
Cylinder	291024	
Head	16	
Precomp	0	
Landing Zone	29103	
Sector	63	

- Access Mode The settings are Auto, CHS, LBA and Large.
- Capacity The formatted size of the storage device.
- Cylinder Number of cylinders.
- Head Number of heads.
- Precomp Write precompensation.
- Landing Zone Cylinder location of the landing zone.
- Sector Number of sectors.

Drive A/B

This item allows you to set the type of floppy drives installed. Available options are *None*, *360K, 5.25 in., 1.2M, 5.25 in., 720K, 3.5 in., 1.44M, 3.5 in., 2.88M, 3.5 in.* The default value for Floppy Drive A is *1.44M, 3.5 in.* and for Floppy Drive B is *None*.

Video

The item sets the type of video adapter used for the primary monitor of the system . Available options are *EGA/VGA* , *CGA 40*, *CGA 80* and *Mono*.

Chapter 3

Default value is *EGA/VGA*.

Halt On

The item determines whether the system will stop if an error is detected at boot. Available options are:

<i>All Errors</i>	The system stops when any error is detected.
<i>No Errors</i>	The system doesn't stop for any detected error.
<i>All, But Keyboard</i>	The system doesn't stop for a keyboard error.
<i>All, But Diskette</i>	The system doesn't stop for a disk error.
<i>All, But Disk/Key</i>	The system doesn't stop for either a disk or a keyboard error.

Advanced BIOS Features

CMOS Setup Utility - Copyright(C) 1984-2000 Award Software
Advanced BIOS Features

Anti-Virus Protection	Disabled	Item Help	
CPU Internal Cache	Enabled		
External Cache	Enabled	Menu Level ▶ Allows you to choose the VIRUS warning feature for IDE Hard Disk boot sector protection. If this function is enabled and someone attempt to write data into this area, BIOS will show a warning message on screen and alarm beep.	
CPU L2 Cache ECC Checking	Enabled		
Processor Number Feature	Enabled		
Quick Power On Self Test	Disabled		
First Boot Device	Floppy		
Second Boot Device	HDD-0		
Third Boot Device	LS120		
Boot Other Device	Enabled		
Swap Floppy Drive	Disabled		
Boot Up Floppy Seek	Enabled		
Boot Up NumLock Status	On		
Gate A20 Option	Normal		
Typematic Rate Setting	Disabled		
x Typematic Rate (Chars/Sec)	6		
x Typematic Delay (Msec)	250		
Security Option	Setup		
OS Select for DRAM > 64MB	Non-OS2		
Video BIOS Shadow	Enabled		
C8000-CBFFF Shadow	Disabled		
CC000-CFFFF Shadow	Disabled		
D0000-D3FFF Shadow	Disabled		
D4000-D7FFF Shadow	Disabled		
D8000-DBFFF Shadow	Disabled		
DC000-DFFFF Shadow	Disabled		
↑↓ → ← : Move Enter: Select +/-/PU/PD: Value F10: Save ESC: Exit F1: General Help F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults			

Anti-Virus Protection

The item is to set the Virus Warning feature for IDE Hard Disk boot sector protection. If the function is enabled and any attempt to write data into this area is made, BIOS will display a warning message on screen and beep. Settings are *Disabled* and *Enabled*. Default value is *Disabled*.

CPU Internal Cache

The item allows you to turn on or off CPU's internal (L1) cache. Settings are *Enabled* (default) and *Disabled*.

External Cache

This allows you to turn on or off L2 (Level 2) cache memory for CPU.

Chapter 3

Settings are *Enabled* (default) and *Disabled*.

CPU L2 Cache ECC Checking

This allows you to enable or disable the ECC (Error-Correcting Code) feature for error detection and correction when data passes through L2 cache memory. Settings are *Enabled* and *Disabled*. Default value is *Enabled*.

Processor Number Feature

This feature is for Pentium® !!! only. When set to *Enabled*, the system will check CPU Serial Number. Set to *Disabled* if you don't want the system to know the CPU Serial Number. Default value is *Enabled*.

Quick Power On Self Test

Setting the item to *Enabled* allows the system to shorten boot time since it will skip some check items. Settings are *Enabled* and *Disabled*. Default value is *Disabled*.

First/Second/Third Boot Device

The items allow you to set the sequence of boot devices where BIOS attempts to load the disk operating system. The settings are:

<i>HDD-0</i>	The system will boot from the first HDD.
<i>HDD-1</i>	The system will boot from the second HDD.
<i>HDD-2</i>	The system will boot from the third HDD.
<i>HDD-3</i>	The system will boot from the fourth HDD.
<i>Floppy</i>	The system will boot from floppy drive.
<i>ZIP100</i>	The system will boot from ATAPI ZIP drive.
<i>LS-120</i>	The system will boot from LS-120 drive.
<i>SCSI</i>	The system will boot from the SCSI.
<i>LAN</i>	The system will boot from the Network drive.
<i>CD-ROM</i>	The system will boot from the CD-ROM.
<i>Disabled</i>	Disable this sequence.

Boot Other Device

Setting the option to *Enabled* allows the system to try to boot from other device if the system fails to boot from the 1st/2nd/3rd boot device.

Swap Floppy Drive

Setting to *Enabled* will swap floppy drives A: and B:. Default is *Disabled*.

Boot Up Floppy Seek

Setting to *Enabled* will make BIOS seek floppy drive A: before booting the system. Setting options are *Disabled* and *Enabled*. Default is *Enabled*.

Boot Up NumLock Status

This item is to set the Num Lock status when the system is powered on. Setting to *On* will turn on the Num Lock key when the system is powered on. Setting to *Off* will allow end users to use the arrow keys on the numeric keypad. Settings are *On* and *Off*. Default is *On*.

Gate A20 Option

This item is to set the Gate A20 status. A20 refers to the first 64KB of extended memory. When the default value *Fast* is selected, the Gate A20 is controlled by Port92 or chipset specific method resulting in faster system performance. When *Normal* is selected, A20 is controlled by a keyboard controller or chipset hardware.

Typematic Rate Setting

This item is used to enable or disable the typematic rate setting including Typematic Rate & Typematic Delay.

Typematic Rate (Chars/Sec)

After Typematic Rate Setting is enabled, this item allows you to set the rate (characters/second) at which the keys are accelerated. Setting options are *6*, *8*, *10*, *12*, *15*, *20*, *24* and *30*.

Typematic Delay (Msec)

This item allows you to select the delay between when the key was first pressed and when the acceleration begins. Setting options are *250*, *500*, *750* and *1000*.

Security Option

This specifies the type of BIOS password protection that is implemented. Setting options are described below:

Chapter 3

Option	Description
Setup (default)	The password prompt appears only when end users try to run Setup.
System	A password prompt appears every time when the computer is powered on or when end users try to run Setup.

OS Select for DRAM > 64MB

This allows you to run the OS/2[®] operating system with DRAM larger than 64MB. When you choose the default value *Non-OS2*, you cannot run the OS/2[®] operating system with DRAM larger than 64MB. But it is possible if you choose *OS2*. Default value is *Non-OS2*.

Video BIOS Shadow

This item sets if the Video BIOS will be copied to RAM and increase video speed accordingly. Settings are *Enabled* (default) and *Disabled*.


C8000-CBFFF/CC000-CFFFF/D0000-D3FFF/D4000-D7FFF/D8000-DBFFF/DC000-DFFFFShadow

These items specify whether the contents of the adapter ROM named in the items will be copied into RAM to improve the performance of ROM firmware for adapters. You need to know the address of each adapter ROM occupies to shadow (copy) it into the correct area of RAM. Settings are *Enabled* and *Disabled* (default).

Advanced Chipset Features

CMOS Setup Utility - Copyright(C) 1984-2000 Award Software
Advanced Chipset Features

DRAM Timing By SPD	Enabled	Item Help
X SDRAM Cycle Length	3	
X DRAM Clock	Host CLK	
Memory Hole	Disabled	Menu Level ▶
P2C/C2P Concurrency	Enabled	
Fast R-W Turn Around	Enabled	
System BIOS Cacheable	Disabled	
Video RAM Cacheable	Disabled	
Frame Buffer Size	8M	
AGP Aperture Size	64M	
OnChip USB	Enabled	
USB Keyboard Support	Disabled	
OnChip Sound	Auto	
OnChip Modem	Auto	
CPU to PCI Write Buffer	Enabled	
PCI Dynamic Bursting	Enabled	
PCI Master 0 WS Write	Enabled	
PCI Delay Transaction	Enabled	
PCI#2 Access #1 Retry	Enabled	
AGP Master 1 WS Write	Disabled	
AGP Master 1 WS Read	Disabled	
Memory Parity/ECC Check	Disabled	
↑ ↓ → ← : Move Enter: Select +/-/PU/PD: Value F10: Save ESC: Exit F1: General Help F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults		

 **Note:** Change these settings only if you are familiar with the chipset.

DRAM Timing by SPD

Selects whether DRAM timing is configured by reading the contents of the SPD (Serial Presence Detect) device on the DRAM module. Setting to *Enabled* makes both DRAM Cycle Length and DRAM Clock automatically determined by BIOS according to the configurations on the SPD.

SDRAM Cycle Length

The option controls the CAS latency, which determines the timing delay before SDRAM starts a read command after receiving it. Settings are 2 and 3 (clock cycles). 2 increases system performance while 3 provides more stable system performance.

Chapter 3

DRAM Clock

The chipset supports synchronous and asynchronous mode between host clock and DRAM clock frequency. The settings are:

- Host CLK* The DRAM clock will be equal to the Host Clock.
- HCLK-33M* The DRAM clock will be equal to the Host Clock minus 33MHz. For example, if the Host Clock is 133MHz, the DRAM clock will be 100MHz.
- HCLK+33M* The DRAM clock will be equal to the Host Clock plus 33MHz. For example, if the Host Clock is 100MHz, the DRAM clock will be 133MHz.

Memory Hole

In order to improve performance, certain space in memory can be reserved for ISA cards. This memory must be mapped into the memory space below 16MB. When this area is reserved, it cannot be cached. The settings are *Enabled* and *Disabled* (default).

P2C/C2P Concurrency

This field enables or disables the PCI to CPU and CPU to PCI concurrency feature, which allows synchronous data transmission from PCI to CPU and vice versa. Selecting the default *Enabled* will increase system performance.

Fast R-W Turn Around

This is used to control the fast read/write turn around feature for DRAM timing. Settings are *Enabled* and *Disabled* (default). *Enabled* improves system performance while *Disabled* provides stability.

System BIOS Cacheable

System BIOS ROM at F000h-F0000h is always copied to RAM for faster execution. Selecting *Enabled* allows the contents of F0000h RAM memory segment to be written to and read from cache memory, resulting in better system performance. However, if any program writes to this memory area, a system error may result. The settings are *Enabled* and *Disabled* (default).

Video RAM Cacheable

The field allows the caching of video memory, resulting in increased system

performance. Settings are *Enabled* and *Disabled* (default).

Frame Buffer Size

Frame Buffer is the video memory that stores data for video display (frame). This field is used to determine the memory size for Frame Buffer. Larger frame buffer size increases video performance. Settings are *2M*, *4M* and *8M* (default).

AGP Aperture Size

Selects the size of the Accelerated Graphics Port (AGP) aperture. Aperture is a portion of the PCI memory address range dedicated for graphics memory address space. Host cycles that hit the aperture range are forwarded to the AGP without any translation. Options are *4M*, *8M*, *16M*, *32M*, *64M* and *128M*.

OnChip USB

This is used to enable or disable the USB ports. Settings are *Enabled* and *Disabled*. The default is *Enabled*.

USB Keyboard Support

Set to *Enabled* if you need to use an USB keyboard in the operating system that does not support or have any USB driver installed, such as DOS and SCO Unix. Default is *Disabled*.

OnChip Sound

Auto allows the mainboard to detect whether an audio device is used. If the device is detected, the onboard audio controller will be enabled; if not, the controller is disabled. Disable the controller if you want to use other controller cards to connect an audio device. Settings are *Auto* (default) and *Disabled*.

OnChip Modem

Auto allows the mainboard to detect whether a modem is used. If a modem is detected, the onboard modem controller will be enabled; if not, the controller is disabled. Disable the controller if you want to use other controller cards to connect modems. Settings are *Auto* (default) and *Disabled*.

Chapter 3

CPU to PCI Write Buffer

When *Enabled*, CPU can write up to four words of data into the PCI write buffer before the CPU must wait for PCI bus cycles to finish. When *Disabled*, the CPU must wait after each write cycle until the PCI bus signals that it is ready to receive more data.

PCI Dynamic Bursting

When *Enabled*, every write transaction goes to the write buffer. Then burstable transactions burst on the PCI bus and nonburstable transactions do not.

PCI Master 0 WS Write

When *Enabled*, writes to the PCI bus are executed with zero wait state. Default is *Enabled*.

PCIDelay Transaction

The chipset has an embedded 32-bit posted write buffer to support delay transactions cycles. Select *Enabled* to support compliance with PCI specification version 2.1. Default is *Enabled*.

PCI #2 Access #1 Retry

When *Disabled*, PCI#2 will not be disconnected until access finishes (default). When *Enabled*, PCI#2 will be disconnected if max retries are attempted without success. Default is *Enabled*.

AGP Master 1 WS Write

When *Enabled*, writes to the AGP bus are executed with one wait state inserted. Default is *Disabled*.

AGP Master 1 WS Read

When *Enabled*, one wait state is inserted in the AGP read cycle. Default is *Disabled*.

Memory Parity/ECC Check

User can set the field to *Enabled* for memory checking if the type of DRAM installed in your system is Parity or ECC (Error-Correcting Code) DRAM. Default is *Disabled*.

AGP Master 1 WS Write

When *Enabled*, writes to the AGP bus are executed with one wait state inserted. Default is *Disabled*.

Chapter 3

Integrated Peripherals

CMOS Setup Utility - Copyright(C) 1984-2000 Award Software
Integrated Peripherals

OnChip IDE Channel0	Enabled	Item Help
OnChip IDE Channel1	Enabled	
IDE Prefetch Mode	Enabled	Menu Level ▶
Primary Master PIO	Auto	
Primary Slave PIO	Auto	
Secondary Master PIO	Auto	
Secondary Slave PIO	Auto	
Primary Master UDMA	Auto	
Primary Slave UDMA	Auto	
Secondary Master UDMA	Auto	
Secondary Slave UDMA	Auto	
Init Display First	AGP	
Onboard Lan Device	Enabled	
IDE HDD Block Mode	Enabled	
Onboard FDD Controller	Enabled	
Onboard Serial Port 1	Auto	
Onboard Serial Port 2	Auto	
UART 2 Mode	Standard	
x IR Function Duplex	Half	
x TX, RX inverting enable	No, Yes	
Onboard Parallel Port	378/IRQ7	
Onboard Parallel Mode	Normal	
x ECP Mode Use DMA	3	
x Parallel Port EPP Type	EPP1.9	
Onboard Legacy Audio	Enabled	
Sound Blaster	Disabled	
SB I/O Base Address	220H	
SB IRQ Select	IRQ 5	
SB DMA Select	DMA 1	
MPU-401	Disabled	
MPU-401 I/O Address	330-333H	
Game Port (200-207H)	Enabled	
↑ ↓ → ←: Move Enter: Select +/-/PU/PD: Value F10: Save ESC: Exit F1: General Help F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults		

OnChip IDE Channel0/1

The integrated peripheral controller contains an IDE interface with support for two IDE channels. Choose the default value *Enabled* to activate each channel separately.

IDE Prefetch Mode

The onboard IDE drive interfaces supports prefetching, for faster drive

accesses. Set to *Disabled* if your primary and/or secondary add-in IDE interface does not support prefetching.

Primary/Secondary Master/Slave PIO

The four fields allow you to set a PIO (Programmed Input/Output) mode for each of the four IDE devices that the onboard IDE interface supports. Modes 0~4 provide increased performance. In Auto mode, BIOS automatically determines the best mode for each IDE device.

Primary/Secondary Master/Slave UDMA

Ultra DMA implementation is possible only if your IDE device supports it and your operating environment contains a DMA driver. If both your hard drive and software support Ultra DMA, select *Auto* (default) to enable BIOS support.

Init Display First

This item specifies which VGA card is your primary graphics adapter. Available options are *PCI Slot* and *AGP*. Default value is *AGP*.

Onboard Lan Device

This is used to enable or disable the onboard LAN controller. Settings are *Enabled* (default) and *Disabled*.

IDE HDD Block Mode

This allows your hard disk controller to use the fast block mode to transfer data to and from the hard disk drive. Block mode is also called block transfer, multiple commands or multiple sector read/write. *Enabled* enables IDE controller to use block mode; *Disabled* allows the controller to use standard mode. Default is *Enabled*.

Onboard FDD Controller

This is to enable or disable the onboard Floppy controller. Set to *Enabled* if you have a floppy disk drive installed on the mainboard and want to use it.

Onboard Serial Port 1/2

These items specify the base I/O port address and IRQ for the onboard Serial Port 1 (COM 1)/Serial Port 2 (COM 2). Selecting to *Auto* allows BIOS

Chapter 3

to automatically determine the correct base I/O port address. Available options are *Auto*, *3F8/IRQ4*, *2F8/IRQ3*, *3E8/IRQ4*, *2E8/IRQ3* and *Disabled*. Default is *Auto*. If you have ISA add-on card, the suggested configuration is as the following:

If the ISA add-on card has				Onboard Serial port to be set at			
COM1 (I/O:3F8H)	COM2 (I/O:3F8H)	COM3 (I/O:3E8H)	COM4 (I/O:2E8H)	PORT1	IRQ ASSIGNED	PORT2	IRQ ASSIGNED
✓	✓	✓	✓	DISABLED	X	DISABLED	X
✓	✓	X	X	COM3	4	COM4	3
X	X	✓	✓	COM1	4	COM2	3
✓	X	X	✓	COM2	3	COM3	4
X	✓	✓	X	COM1	4	COM4	3
✓	✓	✓	X	COM4	3	DISABLED	X
✓	✓	X	✓	COM3	4	DISABLED	X
✓	X	✓	✓	COM2	3	DISABLED	X
X	✓	✓	✓	COM1	4	DISABLED	X
X	X	X	X	COM1	4	COM2	3
✓	X	X	X	COM2	3	COM3	4
X	✓	X	X	COM1	4	COM3	4
X	X	✓	X	COM1	4	COM2	3
X	X	X	✓	COM1	4	COM2	3

UART2Mode

The item allows you to specify the operation mode for serial port “COM 2”. Settings are:

<i>Standard</i>	RS-232C Serial Port
<i>HPSIR</i>	IrDA-compliant Serial Infrared Port
<i>ASKIR</i>	Amplitude Shift Keyed Infrared Port

IR Function Duplex

This field specifies a duplex value for the IR device connected to COM 2. Full-Duplex mode permits simultaneous two-direction transmission. Half-Duplex mode permits transmission in one direction only at a time. Settings are *Half* and *Full*. The default is *Half*.

TX, RX inverting enable

This item allows you to enable the TX, RX inverting which depends on different H/W requirement. This field is not recommended to change its default setting for avoiding any error in your system. Settings are “No, Yes” (default), “Yes, No”, “Yes, Yes” and “No, No.”

Onboard Parallel Port

This specifies the base I/O port address and IRQ of the onboard Parallel Port. Settings are 378/IRQ7, 278/IRQ5, 3BC/IRQ7 and Disabled. Default is 378/IRQ7. If you have an ISA add-on card, the suggested configuration is as below:

If the ISA add-on card has			Onboard parallel port to be set as	
LPT1 I/O:378H	LPT2 I/O:278H	LPT3 I/O:3BCH	PORT ASSIGNED	IRQ ASSIGNED
✓	✓	✓	Disabled	X
✓	✓	X	LPT3	5
✓	X	✓	LPT2	5
X	✓	✓	LPT1	7
✓	X	X	LPT2	5
X	✓	X	LPT1	7
X	X	✓	LPT1	7
X	X	X	LPT1	7

Note: If the onboard parallel port interrupt and ISA add-on card interrupt are in conflict, the parallel port will not work properly. Please disable one of the devices.

Onboard Parallel Mode

This item selects the operating mode for the parallel port: *Normal, EPP, ECP* or *ECP+EPP*. Default is *Normal*.

ECP Mode Use DMA

This item specifies an DMA channel 1 or 3 for the Parallel Port when it is set to *ECP* or *ECP+EPP* mode.

Chapter 3

Parallel Port EPP Type

The item selects the EPP version used by the parallel port if the port is set to *EPP* or *ECP+EPP* mode. Settings are *EPP1.7* and *EPP1.9*.

Onboard Legacy Audio

The item enables or disables the onboard audio features of the mainboard and the following audio options in the BIOS.

Sound Blaster

The item turns on/off the Sound Blaster feature of the board. If you want to play the Sound Blaster compatible games, you need to set the field to *Enabled*.

SB I/O Base Address

This item specifies the I/O Base Address for the Sound Blaster. Settings are 220H, 240H, 260H and 280H.

SB IRQ Select

This item specifies the IRQ for the Sound Blaster. Settings are IRQ 5, IRQ 7, IRQ 9 and IRQ 10.

SB DMA Select

This item specifies the DMA channel for the Sound Blaster. Settings are DMA 1, DMA 2, DMA 3 and DMA 0.

MPU-401

The field enables or disables the MPU-401 interface (the Yamaha Sound Blaster mode).

MPU-401 I/O Address

This item selects the base I/O port address for the MPU-401 interface. Settings are *330-333H*, *300-303* and *310-313*.

Game Port (200-207H)

The item enables or disables the Joystick/Game port.

Power Management Setup

CMOS Setup Utility - Copyright(C) 1984-2000 Award Software
Power Management Setup

ACPIfunction	Enabled	Item Help
▶ Power Management	Press Enter	
ACPI Suspend Type	S1 (POS)	
PM Control by APM	Yes	Menu Level ▶
Video Off Option	Suspend --> Off	
Video Off Method	V/H SYNC + Blank	
MODEM Use IRQ	3	
Soft-Off by PWRBTN	Instant-Off	
State After Power Failure	Auto	
LED In Suspend	Blink	
▶ Wake Up Events	Press Enter	
↑↓→←:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5:Previous Values F6:Fail-Safe Defaults F7:Optimized Defaults		

ACPIFunction

This item is to activate the ACPI (Advanced Configuration and Power Management Interface) Function. If your operating system is ACPI-aware, such as Windows 98SE/2000/ME, select *Enabled*. Settings are *Enabled* and *Disabled*. Default is *Enabled*.

PowerManagement

Press <Enter> to enter the sub-menu for power management options.

Chapter 3

Power Management		
Power Management	User Define	Item Help
HDD Power Down	Disable	
Doze Mode	Disable	
Suspend Mode	Disable	Menu Level ▶▶

Power Management

This item is used to select the degree (or type) or power saving and is related to these modes: Doze Mode, Suspend Mode and HDD Power Down. There are three options for power management:

- Min Saving* Minimum Power Management. Doze Mode = 1 hour, Suspend Mode = 1 hour, and HDD Power Down = Disable.
- Max Saving* Maximum Power Management. Doze Mode = 10 sec, Suspend Mode = 10 sec, and HDD Power Down = Disable.
- User Define* Allows end users to configure each mode separately. Each of the ranges are from *1 min.* to *1 hour* except for HDD Power Down which ranges from *1 min.* to *15 min.*

Default value is *User Define*.

HDD Power Down

If HDD activity is not detected for the length of time specified in this field, the hard disk drive will be powered down while all other devices remain active. Settings are *Disable* and *1* through *15 Min.*

Doze Mode

If system activity is not detected for the length of time specified in this field, the CPU clock will run at slower speed while other devices still run at full speed. Settings are *Disable*, *1 Min*, *2 Min*, *4 Min*, *6 Min*, *8 Min*, *10 Min*, *20*

Min, 30 Min, 40 Min and 1 Hour.

Suspend Mode

If system activity is not detected for the length of time specified in this field, all devices except CPU will be shut off. Settings are *Disable, 1 Min, 2 Min, 4 Min, 6 Min, 8 Min, 10 Min, 20 Min, 30 Min, 40 Min and 1 Hour.*

ACPI Suspend Type

This item specifies the power saving modes for ACPI function. Options are:

- S1 (POS)* The S1 sleep mode is a low power state. In this state, no system context is lost (CPU or chipset) and hardware maintains all system context.
- S3 (STR)* The S3 sleep mode is a lower power state where the information of system configuration and open applications/files is saved to main memory that remains powered while most other hardware components turn off to save energy. The information stored in memory will be used to restore the system when an “wake up” event occurs.

Default value is *S1 (POS)*.

PM Control by APM

Setting to *Yes* will activate an Advanced Power Management (APM) device to enhance Max Saving mode and stop CPU internal clock. Settings are *Yes* and *No*. Default is *Yes*.

Video Off Option

The settings are *Always On, Suspend* and *All Modes*. This option is for choosing the setting in which the monitor will turn off.

- Always On* Always turn on.
- Suspend --> Off* During Suspend mode, the monitor will be turned off.
- All Modes --> Off* The monitor is turned off during Doze, Standby or Suspend mode.

Chapter 3

Video Off Method

This determines the manner in which the monitor is blanked.

<i>V/H SYNC+Blank</i>	This selection will cause the system to turn off the vertical and horizontal synchronization ports and write blanks to the video buffer.
<i>Blank Screen</i>	This option only writes blanks to the video buffer.
<i>DPMS Support</i>	Initial display power management signaling.

MODEMUseIRQ

Name the interrupt request (IRQ) line assigned to the modem (if any) on your system. Activity of the selected IRQ always awakens the system. Settings are 3, 4, 5, 7, 9, 10, 11 and NA.

Soft-Off by PWRBTN

This feature allows users to configure the power button as a normal power-on/-off button or a soft-off button. Settings are:

<i>Instant-Off</i>	The power button functions as a normal power-on/-off button.
<i>Delay 4 Sec.</i>	Pressing the power button for more than 4 seconds will place the system in a very low-power-usage state (Soft-Off state), with only enough circuitry receiving power to detect power button activity or Wake Up On LAN/Ring activity.

Default is *Instant-Off*.

State After Power Failure

This item specifies whether your system will reboot after a power failure or interrupts occurs. Available settings are:

<i>Off</i>	Leaves the computer in the power off state.
<i>On</i>	Reboots the computer.
<i>Auto</i>	BIOS automatically determines the best mode.

LED In Suspend

This item sets how the system uses Power LED on the case to indicate the

suspend state. Settings are:

- Blink* The Power LED blinks to indicate the suspend state.
- Single* The Power LED remains the same color.
- Dual* The Power LED changes its color to indicate the suspend state.

Wake Up Events

Press <Enter> to enter the sub-menu and the following screen appears:

Wake Up Events		
VGA	OFF	Item Help
LPT & COM	LPT/COM	
HDD & FDD	ON	Menu Level ▶ ▶
PCI Master	OFF	
Wake Up On LAN	Disabled	
PowerOn by PCI Card	Disabled	
Modem Ring Resume	Disabled	
RTC Alarm Resume	Disabled	
x Date (of Month)	0	
x Resume Time (hh:mm:ss)	16 0 0	
▶ IRQs Activity Monitoring	Press Enter	

VGA, LPT & COM, HDD & FDD, PCI Master, Wake Up On LAN, PowerOn by PCI Card, Modem Ring Resume

These items specify whether the system will be awakened from power saving modes when activity or input signal of the specified hardware peripheral or component is detected.

Note: To use the function of Wake Up On LAN and Modem Ring Resume, you need to install a LAN card/modem supporting power on function.

RTC Alarm Resume

This is to enable or disable the feature of booting up the system on a scheduled time/date. Settings are *Enabled* and *Disabled* (default)

Date (of Month)

Specifies the date for **RTC Alarm Resume**. Settings are 0~31.

Chapter 3

Resume Time (hh:mm:ss)

Specifies the time for **RTC Alarm Resume**. Format is <hour><minute><second>.

IRQs Activity Monitoring

Press <Enter> to enter the sub-menu and the following screen appears:

IRQs Activity Monitoring		
Primary INTR	ON	Item Help
IRQ3 (COM 2)	Enabled	
IRQ4 (COM 1)	Enabled	
IRQ5 (LPT 2)	Enabled	
IRQ6 (Floppy Disk)	Enabled	
IRQ7 (LPT 1)	Enabled	
IRQ8 (RTC Alarm)	Disabled	
IRQ9 (IRQ2 Redir)	Disabled	
IRQ10 (Reserved)	Disabled	
IRQ11 (Reserved)	Disabled	
IRQ12 (PS/2 Mouse)	Enabled	
IRQ13 (Coprocessor)	Enabled	
IRQ14 (Hard Disk)	Enabled	
IRQ15 (Reserved)	Disabled	
		Menu Level ▶ ▶ ▶

Primary INTR

When this is set to *ON*, any event occurring will wake up the system which has been powered down.

IRQ3~IRQ15

Enables or disables the monitoring of the specified IRQ line. If set to *Enabled*, the activity of the specified IRQ line will prevent the system from entering power saving modes or awaken it from power saving modes.

Note: IRQ (Interrupt Request) lines are system resources allocated to I/O devices. When an I/O device needs to gain attention of the operating system, it signals this by causing an IRQ to occur. After receiving the signal, when the operating system is ready, the system will interrupt itself and perform the service required by the I/O device.

PnP/PCI Configurations

CMOS Setup Utility - Copyright(C) 1984-2000 Award Software
PnP/PCI Configurations

PNP OS Installed	No	Item Help
Reset Configuration Data	Disabled	
Resources Controlled By	Auto (ESCD)	Menu Level ▶ Select Yes if you are using a Plug and Play capable operation system Select No if you need the BIOS to configure non-boot devices
x IRQ Resources	Press Enter	
x DMA Resources	Press Enter	
PCI/VGA Palette Snoop	Disabled	
Assign IRQ For VGA	Enabled	
Assign IRQ For USB	Enabled	
↑ ↓ → ← : Move Enter: Select +/- /PU/PD: Value F10: Save ESC: Exit F1: General Help F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults		

PNP OS Installed

When set to *YES*, BIOS will only initialize the PnP cards used for booting (VGA, IDE, SCSI). The rest of the cards will be initialized by the PnP operating system like Windows® 95 or 98. When set to *NO*, BIOS will initialize all the PnP cards. So, select *Yes* if the operating system is Plug & Play aware.

Reset Configuration Data

The ESCD (Extended System Configuration Data) is a method that the BIOS uses to store resource information for both PNP and non PNP devices in a bit string format. When *Enabled*, the system will rebuild ESCD and you will see the message “ESCD Update Successfully” on boot up.

Resources Controlled By

If select *Auto(ESCD)*, BIOS will automatically configure all the boot and PnP (Plug & Play) compatible devices and assigns system resources like IRQ to these devices. However, this feature means absolutely nothing unless you are using a Plug and Play operating system such as Windows®95/98. If you

Chapter 3

want to configure by yourself, select *Manual*. Default is *Auto(ESCD)*.

IRQ/DMA Resources

The items are adjustable only when **Resources Controlled By** is set to *Manual*. Press <Enter> and you will enter the sub-menu of the items. **IRQ Resources & DMA Resources** list IRQ 3/4/5/7/9/10/11/12/14/15 and DMA 0/1/3/5/6/7 for users to set each IRQ/DMA a type depending on the type of device using the IRQ/DMA. Settings are:

- PCI/ISA PnP* For Plug & Play compatible devices designed for PCI or ISA bus architecture.
- Legacy ISA* For devices compliant with the PC AT bus specification, requiring a specific interrupt.

PCI/VGA Palette Snoop

When set to *Enabled*, multiple VGA devices operating on different buses can handle data from the CPU on each set of palette registers on every video device. Bit 5 of the command register in the PCI device configuration space is the VGA Palette Snoop bit (0 is disabled). For example, if there are two VGA devices in the computer (one PCI and one ISA) and the:

VGA Palette Snoop Bit Setting	Action
<i>Disabled</i>	Data read or written by the CPU is only directed to the PCI VGA device's palette registers.
<i>Enabled</i>	Data read or written by the CPU is directed to both the PCI VGA device's palette registers and the ISA VGA device's palette registers, permitting the palette registers of both VGA devices to be identical.

The setting must be set to *Enabled* if any ISA adapter card installed in the system requires VGA palette snooping. The Setup and BIOS default values are *Disabled*.

Assign IRQ For VGA/USB

Set to *Enabled* allows BIOS to assign an IRQ to VGA card/USB device. Choose *Disabled* if you want to release the IRQ. Default is *Enabled*.

PC Health Status

This section is to monitor the current hardware status including CPU temperature, CPU Fan speed, Vcore etc. This is available only if there is hardware monitoring onboard.

CMOS Setup Utility - Copyright(C) 1984-2000 Award Software
PC Health Status

Current CPU Temp.	58°C/132°F	Item Help
Current System Temp.	23°C/73°F	
Current CPUFAN Speed	4200RPM	
Current System Fan Speed	4560RPM	Menu Level ▶
Vcore	1.66V	
2.5V	2.41V	
3.3V	3.30V	
5V	5.02V	
12V	12.05V	
↑↓→←:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5:Previous Values F6:Fail-Safe Defaults F7:Optimized Defaults		

Current CPU Temp., Current System Temp., Current CPUFAN/System Fan Speed, Vcore, 2.5/3.3/5/12V

These items display the current status of all of the monitored hardware devices/components such as CPU voltages, temperatures and all fans's speed.

Chapter 3

Frequency/Voltage Control

CMOS Setup Utility - Copyright(C) 1984-2000 Award Software
Frequency/Voltage Control

Auto Detect DIMM/PCI Clk	Enabled	Item Help
Spread Spectrum	Disabled	
CPU Host/PCI Clock	Default	Menu Level ▸
↑ ↓ → ← : Move Enter : Select +/- /PU/PD : Value F10 : Save ESC : Exit F1 : General Help F5 : Previous Values F6 : Fail-Safe Defaults F7 : Optimized Defaults		

Auto Detect DIMM/PCI Clk

Use this item to enable or disable the feature of auto detecting the clock frequency of the installed DRAM DIMMs and PCI cards. Settings are *Enabled* (default) and *Disabled*.

Spread Spectrum

This item is used to enable or disable the clock generator's Spread Spectrum feature. When overclocking the processor, always set it to *Disabled*. Settings are *Enabled* and *Disabled* (default).


CPU Host/PCI Clock

This item specifies the clock frequency of CPU host bus (FSB) and PCI bus and provides a method for end users to overclock the processor accordingly. If the item shows *Default*, the clock frequency will use the default value for both the CPU host bus and PCI bus.

Load Fail-Safe/Optimized Defaults

The two options on the main menu allow users to restore all of the BIOS settings to the default Fail-Safe or Optimized values. The Optimized Defaults are the default values set by the mainboard manufacturer specifically for the optimal performance of the mainboard. The Fail-Safe Defaults are the default values set by the BIOS vendor for the stable system performance.


When you select Load Fail-Safe Defaults, a message as below appears:

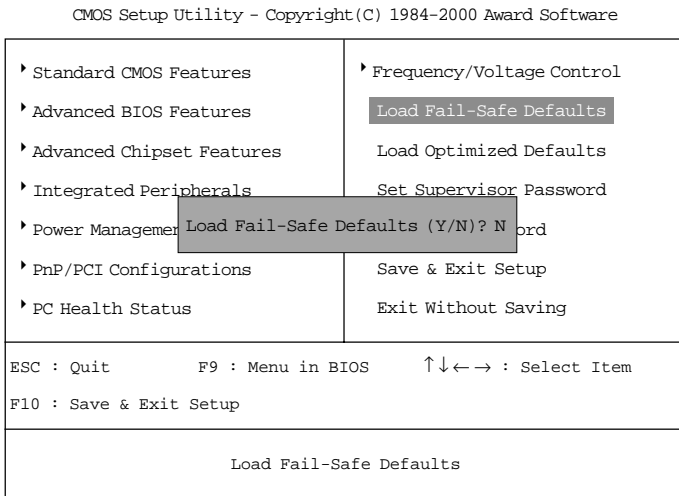

Pressing Y loads the BIOS default values for the most stable, minimal system performance.

Chapter 3


When you select Load Optimized Defaults, a message as below appears:

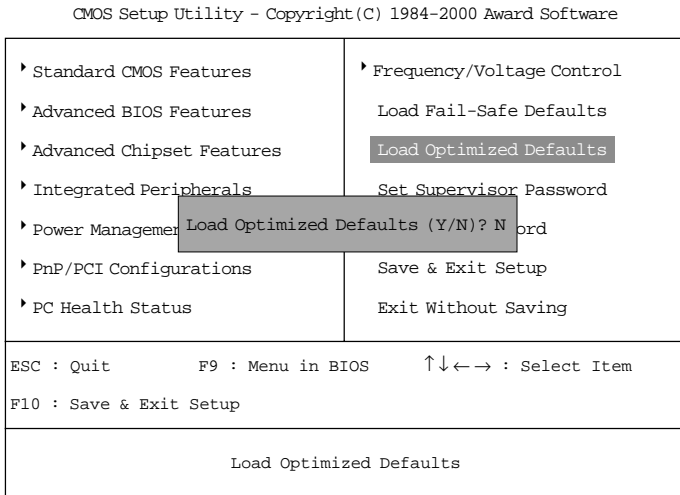

Pressing *Y* loads the default factory settings for optimal system performance.

Set Supervisor/User Password

When you select this function, a message as below will appear on the screen:

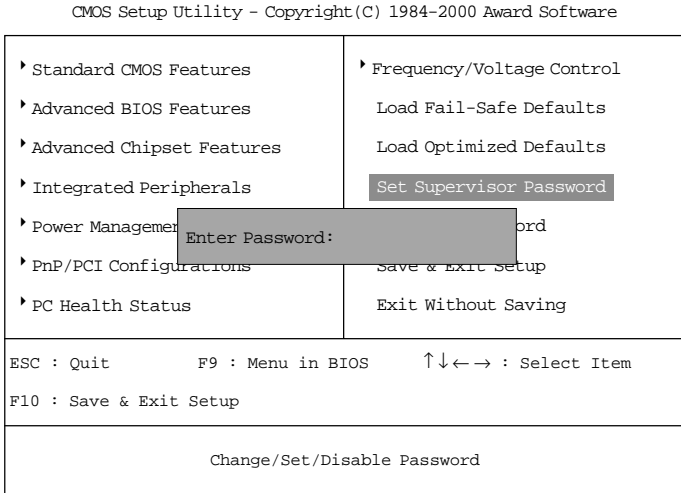

Type the password, up to eight characters in length, and press <Enter>. The password typed now will clear any previously set password from CMOS memory. You will be prompted to confirm the password. Re-type the password and press <Enter>. You may also press <Esc> to abort the selection and not enter a password.

To clear a set password, just press <Enter> when you are prompted to enter the password. A message will show up confirming the password will be disabled. Once the password is disabled, the system will boot and you can enter Setup without entering any password.

When a password has been set, you will be prompted to enter it every time you try to enter Setup. This prevents an unauthorized person from changing any part of your system configuration.

Additionally, when a password is enabled, you can also have BIOS to request a password each time the system is booted. This would prevent unauthorized

Chapter 3

use of your computer. The setting to determine when the password prompt is required is the Security Option of the Advanced BIOS Features menu. If the Security Option is set to *System*, the password is required both at boot and at entry to Setup. If set to *Setup*, password prompt only occurs when trying to enter Setup.


About Supervisor Password & User Password:

Supervisor password : Can enter and change the settings of the setup menus.

User password: Can only enter but do not have the right to change the settings of the setup menus

Save & Exit Setup

When you want to quit the Setup menu, you can select this option to save the changes and quit. A message as below will appear on the screen:

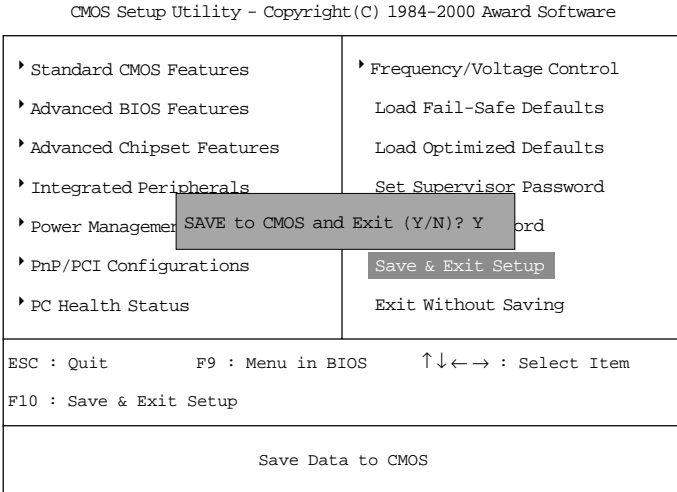


Typing *Y* will allow you to quit the Setup Utility and save the user setup changes to RTC CMOS.

Typing *N* will return to the Setup Utility.

Chapter 3

Exit Without Saving

When you want to quit the Setup menu, you can select this option to abandon the changes. A message as below will appear on the screen:

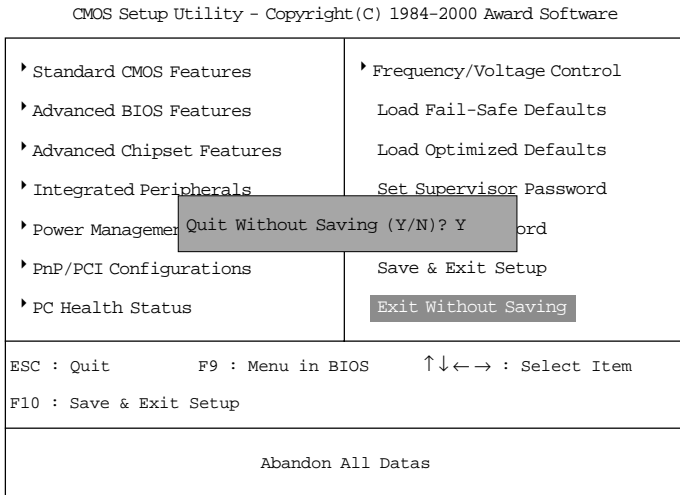

Typing *Y* will allow you to quit the Setup Utility without saving any changes to RTC CMOS.

Typing *N* will return to the Setup Utility.

Installing Drivers

4

The chapter describes how to install drivers for VIA chipset, AC97 audio, VGA and Realtek® 8100 fast ethernet controller, and the basic system requirements for driver installation. To install the drivers correctly, you must install VIA chipset driver before installing other drivers.

This chapter contains the following topics:

Overview	4-2
Driver Installation for Windows® 98SE	4-3
Driver Installation for Windows® 2000	4-5
Driver Installation for Windows® ME	4-7
Driver Installation for Windows® NT4.0	4-9
Realtek® 8100 Fast Ethernet Controller	4-11

Chapter 4

Overview

The MS-6368 (v2.X) is paired with the VIA® Apollo PLE133 chipset. Highly advanced, the chipset combines 2D/3D engine with DVD hardware acceleration, AC-97 audio support for SoundBlaster Pro and FM synthesis legacy audio.

The mainboard comes with a Realtek® 8100 fast ethernet controller, so you need to install the Realtek LAN driver to support the LAN function.

Audio Features

- AC'97 audio support for SoundBlaster Pro
- FM synthesis legacy audio

System Requirements

This section describes system requirements for the VIA & Realtek LAN driver installation and usage.

Computer	Intel® Celeron™/Pentium® !!! (FC-PGA) processor or higher
Monitor	VGA Support, minimum 640x480 resolution
Operating system	DOS 5.0 or higher, Windows® 95/98, Windows® NT3.51 or 4.0, OS/2®, Windows® 2000, or Windows® ME
CD-ROM	Double Speed or higher
Chipset	VIA®VT8601A/VT82C686B chipset

Driver Installation for Windows® 98SE

Installing VIA® Chipset Driver

1. Insert the supplied CD disk into the CD-ROM drive.
2. The CD will auto-run and the setup screen will appear.
3. Click on **Via Chipset Drivers** and the screen will show **VIA Service Pack 4.XX**.
4. Click **Next** and the screen will show a **VIA Service Pack 1 README** dialog box.
5. Click **Next** and the screen will show four drivers: **VIA Atapi Vendor Support Driver**, **AGP VxD Driver**, **IRQ Routing Miniport Driver** and **VIA INF Driver 1.XX**. Select all four drivers and click on **Next**.
6. The setup program will request you to choose **Install VIA Atapi Vendor Support Driver**. Select **Install** and click **Next** to continue.
7. Select **Click to enable DMA Mode** and click **Next** to continue.
8. The setup program will request you to choose **Install VIA AGP VxD in turbo mode**, **Install VIA AGP VxD in normal mode** or **Uninstall VIA AGP VxD**. Select **Install VIA AGP VxD in turbo mode** and click on **Next**.
9. Select **Install VIA IRQ Routing Miniport Driver** and click on **Next**.
10. The setup program will request you to choose whether to restart the computer or not. Please select “Yes, I want to restart my computer now” and click **Finish**. The computer will restart and complete the VIA Chipset Drivers installation.

Installing VIA® AC97 PCI Sound Driver

1. Make sure the supplied CD disk is in the CD-ROM drive.
2. Go to **My Computer** and double click on the CD-ROM icon. The setup screen will appear again.
3. Click on **VIA AC97 PCI Sound Drivers** and the screen will show **VIA Audio Driver Setup Program 1.XX**.
4. Click **Next** to proceed and the screen will show **Install** or **Uninstall**. Select **Install** and then click on **Next**.
5. Click **Finish** to complete the AC97 Audio Driver Installation.

Installing VIA® PLE133 VGA Driver

1. Make sure the supplied CD disk is in the CD-ROM drive.

Chapter 4

2. Go to **My Computer** and double click on the CD-ROM icon. The setup screen will appear again.
3. Click on **VIA PLE/KLE133 VGA Driver** and the screen will show **Pro Savage Driver Setup**. Click **Next**.
4. The screen will show a **Start Copying Files** dialog box. Click **Next**.
5. The setup program will request you to choose whether to restart the computer or not. Please select “Yes, I want to restart my computer now” and click **Finish**. The computer will restart and finish the VIA ProSavage Driver installation.

Driver Installation for Windows® 2000

Installing VIA® Chipset Driver

1. Insert the supplied CD disk into the CD-ROM drive.
2. The CD will auto-run and the setup screen will appear.
3. Click on **Via Chipset Drivers** and the screen will show **VIA Service Pack 4.XX**.
4. Click **Next** and the screen will show a **VIA Service Pack 1 README** dialog box.
5. Click **Yes** and the screen will show three drivers: **VIA Bus Master Ultra ATA Driver (Windows 2000)**, **AGP VxD Driver** and **VIA INF Driver 1.XX**. Select all and click **Next** to proceed.
6. The screen will show a **VIA Bus Master Ultra ATA Driver** dialog box. Select **Install** and then click on **Next**.
7. The screen will show a **VIA GART AGP Driver 4.XX** dialog box. Select **Install AGP 4X/133 driver** and click **Next**.
8. There is a **Read Only File Detected** dialog box. Click **Yes**. A dialog box **Digital Signature Not Found** will appear and ask “Do you want to continue the installation of the VIA Bus Master Ultra ATA Controller”. Click **Yes** to continue.
9. Select **Yes** and then click **Finish** to restart the system.
10. After restart, the system will find a new hardware device and the **Found New Hardware Wizard** dialog box will appear. Click **Next** to the next screen and a **VIA BM Ultra DMA Channel** device will be found.
11. Click **Next** and the driver search result will be shown on the screen. Click **Next**.
12. A dialog box **Digital Signature Not Found** will appear. Click **Yes**.
13. Click **Finish** and then click **Yes** to restart the system.
14. Repeat **Step 10 through Step 13** again.
15. After restart, the VIA Chipset driver installation will be complete.

Installing VIA® AC97 PCI Sound Driver

1. Make sure the supplied CD disk is in the CD-ROM drive.
2. Go to **My Computer** and double click the CD-ROM icon. The setup screen will appear again.
3. Click on **VIA AC97 PCI Sound Drivers** and the screen will show **VIA AC97 PCI Sound Drivers**.

Chapter 4

4. Click **Next** to proceed and the screen will show **Install** or **Uninstall**. Select **Install** and then click on **Next**.
5. A window **Digital Signature Not Found** will appear and ask “Do you want to continue the installation of the VIA AC’97 Audio Controller (WDM) Driver?” Click **Yes** to proceed.
6. Click **Finish** to complete setup.

Installing VIA® PLE133 VGA Driver

1. Make sure the supplied CD disk is in the CD-ROM drive.
2. Go to **My Computer** and double click on the CD-ROM icon. The setup screen will appear again.
3. Click on **VIA PLE/KLE133 VGA Driver** and the screen will show **Pro Savage Driver Setup**. Click **Next**.
4. The screen will show a **Start Copying Files** dialog box. Click **Next**.
5. A window **Digital Signature Not Found** will appear and ask “Do you want to continue the installation of the S3 Graphics Inc. Pro Savage?” Please click **Yes** to proceed.
6. Click **Finish** to restart your computer and complete setup.

One Touch Setup:

*In Windows® 2000, you probably will see the **One Touch Setup** button appear on the setup screen. Choosing the button will help you install more than one driver into the system without going through the installation process step by step and save a lot of time. After clicking on **One Touch Setup**, a window will show up listing what drivers will be installed. Install other drivers not included by **One Touch Setup** manually if any.*

Driver Installation for Windows® ME

Installing VIA® Chipset Driver

1. Insert the supplied CD disk into the CD-ROM drive.
2. The CD will auto-run and the setup screen will appear.
3. Click on **Via Chipset Drivers** and the screen will show **VIA Service Pack 4.XX**.
4. Click **Next** and the screen will show a **VIA Service Pack 1 README** dialog box.
5. Click **Yes** and the screen will show two drivers: **AGP VxD Driver** and **VIA INF Driver 1.XX**. Select all and click **Next** to proceed.
6. The screen will show a **VIA_GART AGP Driver 4.XX** dialog box. Select **Install VIA AGP VxD in Turbo mode** and click **Next**.
7. The setup program will request you to choose whether to restart the computer or not. Please select “Yes, I want to restart my computer now” and click **Finish**. The computer will restart and finish the VIA Chipset Drivers installation.

Installing VIA® AC97 PCI Sound Driver

1. Make sure the supplied CD disk is in the CD-ROM drive.
2. Go to **My Computer** and double click the CD-ROM icon. The setup screen will appear again.
3. Click on **VIA AC97 PCI Sound Drivers**.
4. Then restart the system manually to make it work.

Installing VIA® PLE/KLE133 VGA Driver

1. Make sure the supplied CD disk is in the CD-ROM drive.
2. Go to **My Computer** and double click on the CD-ROM icon. The setup screen will appear again.
3. Click on **VIA PLE/KLE133 VGA Driver** and the screen will show **Pro Savage Driver Setup**. Click **Next**.
4. The screen will show a **Start Copying Files** dialog box. Click **Next**.
5. The setup program will request you to choose whether to restart the computer or not. Please select “Yes, I want to restart my computer now” and click **Finish**. The computer will restart and finish the ProSavage Driver installation.

Chapter 4

One Touch Setup:

*In Windows® ME, you probably will see the **One Touch Setup** button appear on the setup screen. Choosing the button will help you install more than one driver into the system without going through the installation process step by step and save a lot of time. After clicking on **One Touch Setup**, a window will show up listing what drivers will be installed. Install other drivers not included by **One Touch Setup** manually if any.*

Driver Installation for Windows® NT4.0

Note: Install Windows® NT4.0 Service Pack 6 or above before installing the VIA drivers into Windows® NT.

Installing VIA® Chipset Driver

1. Insert the provided CD disk into the CD-ROM drive.
2. The CD will auto-run and the setup screen will appear.
3. Click on **VIA Chipset Drivers** and the screen will show **VIA Service Pack 4.XX**.
4. Click **Next** and the screen will show the **VIA Service Pack 1 README** dialog box.
5. Click **Yes** to proceed and then select **Install** to enable (Ultra) DMA for IDE Driver.
6. The **Choose Destination Location** dialog box appears. Click **Next**.
7. The **Select Program Folder** dialog box appears. Click **Next**.
8. Click on “Yes, I want to restart my computer” and then click **Finish** to restart your computer and complete installation.

Installing VIA® AC97 PCI Sound Driver

1. Make sure the supplied CD disk is in the CD-ROM drive.
2. Go to **My Computer** and double click the CD-ROM icon. The setup screen will appear again.
3. Click on **VIA AC97 PCI Sound Drivers** and the screen will show the **VIA PCI Audio Drivers** setup screen.
4. The setup program will show **Install** or **Uninstall**. Select **Install** and click on **Next**.
5. The setup program will show the following message on the screen:

Please choose “Add” from the next window and add the following device:

VIA PCI Audio Controller
VIA MIDI External Port

Then click **OK**.

6. Follow the steps shown in **Step 5** to finish the VIA AC97 PCI Audio Drivers Installation.
7. A window will appear asking “Do you want to install the joystick

Chapter 4

driver for the Microsoft Sidewinder 3D Pro Joystick?" Please click **No** to continue.

8. Please click **Finish** to restart your computer and complete installation.

Installing VIA® PLE/KLE133 VGA Driver

1. Make sure the supplied CD disk is in the CD-ROM drive.
2. Go to **My Computer** and double click on the CD-ROM icon. The setup screen will appear again.
3. Click on **VIA PLE/KLE133 VGA Driver** and the screen will show **Pro Savage Driver Setup**. Click **Next**.
4. The screen will show a **Start Copying Files** dialog box. Click **Next**.
5. Click **Finish** to restart your computer and complete installation.

Realtek® 8100 Fast Ethernet Controller

When your mainboard comes with the Realtek® 8100 LAN controller, you must install the Realtek® LAN driver to support the LAN function. The Realtek® 8100 is a sophisticated 32-bit PCI component, with enhanced scatter-gather bus mastering capabilities. Its true 32-bit architecture enables it to perform high speed data transfers on the PCI bus using four DMA channels.

Features

- IEEE 802.3/802.3u 10BASE-T and 100BASE-TX compatible
- Glueless 32-bit PCI bus master interface
- Backward software compatible to the 82557
- Internal transmit and receive FIFOs (3 kbytes each)
- Back-to-back transmit at 100 Mbps within minimum IFS
- EEPROM support for configuration and customized feature selection
- Advanced configuration and Power Interface Specification, Revision 1.0, and PCI Power Management Specification, Revision 1.0 compliant
- Remote Wake Up (Magic Packet*) support in APM and ACPI modes
- ACPI “interesting” packet wake support in D0 to D3 low power states
- IEEE 802.3u Auto-Negotiation support for 10BASE-T and 100BASE-TX
- Full or half duplex capable at 10 or 100 Mbps
- IEEE 802.3x flow control support

Driver Installation

Installation for Windows® 98

In some operating systems like Windows® 98, the provided CD will auto-run when you insert the CD disk into the CD-ROM drive. To install the LAN driver, just click on the “**Realtek Network Drivers**” button on the screen.

Chapter 4

Installation for Other O/S

To find out the installation procedures for other operating systems such as Windows® 2000 & Linux, insert the provided CD disk into the CD-ROM drive. Run or type the path to:

CD-ROM drive: *\Network\Realtek\8139\Help8139.exe*

Then press spacebar to continue and installation of the LAN driver for different operating systems is listed on the screen. Select the operating system you need by using arrow keys and follow the installation procedures provided.