


ASUS COMPUTER INTERNATIONAL C - P 5 5 T 2 D

Processor	Pentium
Processor Speed	75/90/100/120/133/150/166/200MHz
Chip Set	Intel
Video Chip Set	None
Maximum Onboard Memory	None
Maximum Video Memory	None
Cache	512KB
BIOS	Unidentified
Dimensions	Unidentified
I/O Options	PS/2 mouse port
NPU Options	None

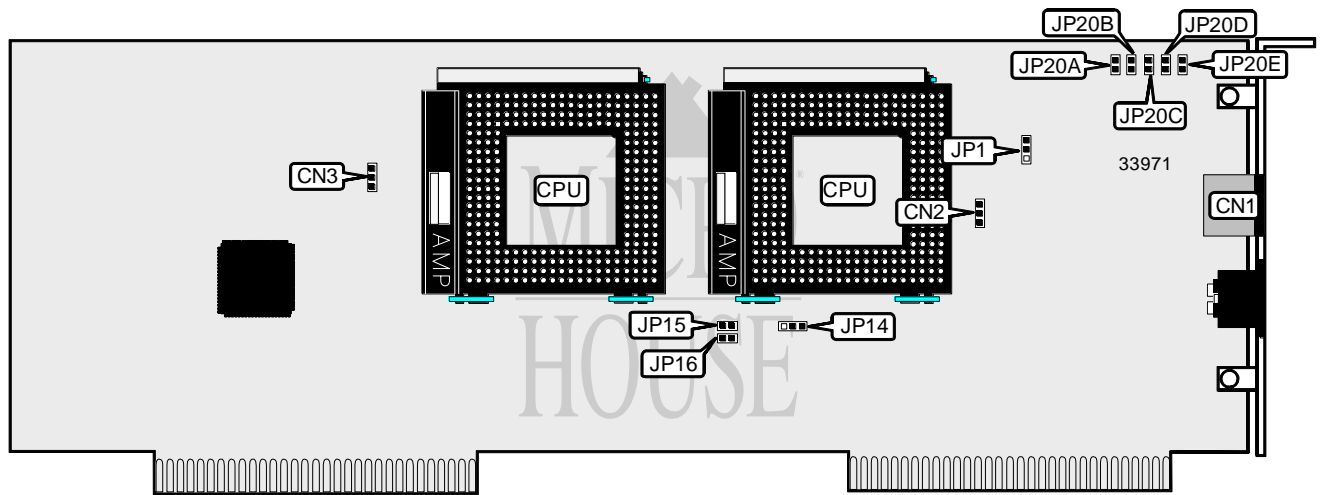

CONNECTIONS			
Purpose	Location	Purpose	Location
PS/2 mouse port	CN1	Chassis fan power	CN3
Chassis fan power	CN2		

Continued on next page. . .

ASUS COMPUTER INTERNATIONAL

C - P 5 5 T 2 D

... continued from previous page

CACHE CONFIGURATION

Note: Board is factory installed with 512KB cache.

CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	JP15	JP16
75MHz	50MHz	1.5x	Open	Open
90MHz	60MHz	1.5x	Open	Open
100MHz	66MHz	1.5x	Open	Open
120MHz	60MHz	2x	Open	Closed
133MHz	66MHz	2x	Open	Closed
150MHz	60MHz	2.5x	Closed	Closed
166MHz	66MHz	2.5x	Closed	Closed
200MHz	66MHz	3x	Closed	Open

CPU TYPE SELECTION

Type	JP14
Single CPU	Pins 2 & 3 closed
í Dual CPUs	Pins 1 & 2 closed

CPU TYPE SELECTION

Type	JP1
STD/VR	Pins 1 & 2 closed
VRE	Pins 2 & 3 closed

CPU VOLTAGE SELECTION

Voltage	JP20A	JP20B	JP20C	JP20D	JP20E
2.5v	Closed	Open	Open	Open	Open
2.7v	Open	Closed	Open	Open	Open
2.8v	Open	Open	Closed	Open	Open
2.9v	Open	Open	Open	Closed	Open
Reserved	Open	Open	Open	Open	Closed