


# PEAK 639VL2

Full-size VIA C3 Processor on Board CPU Card  
w/VGA/LVDS/TTL LCD, Support Dual LAN

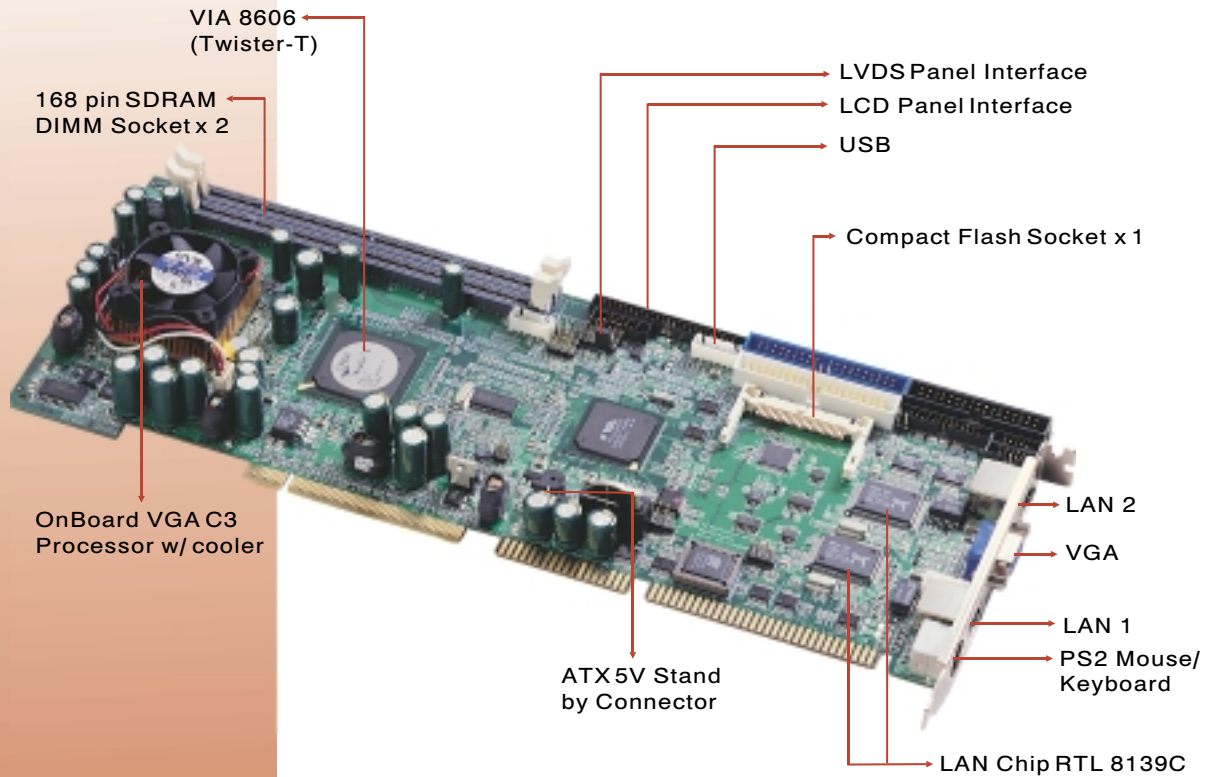

## Features

- ◆ 800MHz CPU on board with EBGA package speed up to 1GHz or above
- ◆ VIA 8606 Chipset with intergrated Savage4 2D/3D/Video Accelerator
- ◆ VIA VT82C686B Super-I/O controller
- ◆ Realtek 8139C LAN x2
- ◆ 168 pin SDRAM DIMM Socket x 2, Max.1GB
- ◆ LVDS/TTL LCD interfaces support, compact flash support



NEXCOM Taiwan  
NEXCOM International Co., LTD.  
18F, No. 716, Chung-Cheng Road, Chung-Ho,  
Taipei Hsien 235, Taiwan, R.O.C.  
Tel: 886-2-8228-0500  
Fax: 886-2-8228-0506  
e-mail: nexcom@nexcom.com.tw

NEXCOM UK  
NEXCOM (UK) LTD.  
Cromwell Business Center  
14 Howard Way, Newport Pagnell,  
Milton Keynes, MK 16 9QS U.K  
Tel: 44 -1908-21 88 77  
Fax: 44 -1908-21 88 67  
e-mail: sales@nexcomuk.co.uk

NEXCOM USA  
NEX Computers Inc.  
46706 Fremont Blvd.  
Fremont, CA 94538, U.S.A  
Tel: 1- 510-656-2248  
Fax: 1- 510-656-2158  
e-mail: sales@nexcom.com

NEXCOM Germany  
NEXCOM GmbH  
Siemensring 44 o  
47877 Willich-Muenchheide  
Germany  
Tel: 49-2154-48160  
Fax: 49-2154-481610  
e-mail: sales@nexcom-ipc.de

NEXCOM Japan  
NEXCOM Japan Co., LTD.  
10F, Nakagin-Shiroyama Bldg., 8-16-13,  
Ginza Chuou-ku Tokyo, Japan 104-0061  
Tel: 03-3524-4250  
Fax: 03-3524-4252  
e-mail: sales@nexcom-jp.com

# PEAK 639VL2

## Specification

### System Architecture

- Full size SBC with PICMG(PCI+ISA) Goldenfinger
- PCI V2.2 compliant
- PICMG 1.0 (Rev.2.0) compliant

### On Board CPU

- Onboard VIA C3 Processor EBGA Packagewith 128KB Level 1 and 64KB Level 2 Cache
- 800MHz CPU speed up to 1GHz or above in the future
- CPU FSB 133MHz

### Main Memory

- Support 168 pin DIMM Socket x2, up to 1GB
- PCI 133 SDRAM types

### BIOS

- Award System BIOS
- Plug & Play support
- Advanced Power Management support
- Advanced Configuration & Power Interface support
- 2Mb flash ROM (Design for 4Mb or above)

### Chip Set

- VIA 8606 (Twister T) 100/133 MHz North Bridge
- VIA VT82C686B PS/2 PCI SUPER-I/O INTEGRATED PERIPHERAL CONTROLLER

### On Chip VGA

- VIA 8606 Integrated Savage4 2D/3D/Video Accelerator
  - ◊ Optimized Shared Memory Architecture (SMA)
  - ◊ 8 / 16 / 32 MB frame buffer using system memory
  - ◊ Single cycle 128-bit 3D architecture
  - ◊ Full internal AGP 4x performance
  - ◊ Next generation, 128-bit 2D graphics engine
  - ◊ High quality DVD video playback
  - ◊ 2D/3D resolutions up to 1920x1440
  - ◊ 3D Rendering Features
- Extensive LCD Support
  - ◊ 36-bit DSTN/TFT flatpanel interface with 256 gray shade support
  - ◊ Integrated 110 MHz LVDS interface
  - ◊ Support for all resolutions up to 1600x1200
- Drivers support: Windows 95/98/2000, Windows NT4.0, Linux.
- 15 pin D-Sub VGA Output,
- 16 pin Box Header for LVDS Interface Connector x 1
- 50 pin Box Header for TTL LCD Interface support x 1

### On Board Dual LAN

- RTL8139C Ethernet Controller x2
- 10 Base T/100 Base TX support, full duplex
- Complied with PCI V2.1, IEEE802.3, IEEE 802.3U
- Drivers support: DOS/Windows, Windows 95/98/2000, Windows NT, Netware, SCO Open Server 5.0, Linux
- RJ45 connector 2 (Pin-header for LED)

### On Board I/O

- VT82C686B INTEGRATED Super I/O:
  - ◊ Integrated ISA Bus Controller with integrated DMA, timer, and interrupt controller

- ◊ Integrated Keyboard Controller with PS2 mouse support
- ◊ Integrated DS12885-style Real Time Clock and Day/Month Alarm for ACPI
- ◊ Integrated USB Controller with root hub and four function ports
- ◊ Integrated UltraDMA-33/66/100 master mode EIDE controller with enhanced PCI bus commands
- ◊ Distributed DMA support for ISA legacy DMA across the PCI bus
- SIO x 2 (Pitch: 2.00mm), with 2x16C550 UARTs, 10 pin header x 2 (For RS-232) (Back-Side Reserved for 422/485)
- PIO x 1 (Pitch: 2.00mm), bi-directional, EPP/ECP support, 26 pin connector x 1
- Floppy Disk controller: 34 pin connector x 1
- UltraDMA-33/66/100 IDE with 40 pin connector x 2 (2pin power header for DOM)
- On board Compact Flash x 1
- External Keyboard 5 pin connector x 1 : 6 pin mini DIN connector x 1, for PS/2 keyboard/mouse
- On board USB port x 2
- GPIO (4 in/4 out)
- On board buzzer x 1
- On board 5 pin header for IrDA
- On Board 2 pin header for reset SW / 2 Pin for Power LED / 2 pin power SW
- 3 Pin Jst (5Vsb, PS-On, GND) for connect to Back plane support the ATX Power Mode
- AC 97 Pin Header Reserved

### On Chip RTC

- On chip RTC with battery back up

### System Monitor

- VT82C686B Integrated Voltage, Temperature, Fan Speed Monitor and Controller
- 5 positive voltage, 2 temperature (one internal) and 1 fan-speed monitoring

### ISAMAX Support

- Maximize ISA signals to support 20 ISA cards

### Watchdog Timer

- 1,2,4,8,16,32,64 seconds time-out intervals

### Dimensions

- 338.58mm(L) x 122mm(W)

### Power Requirements (Testing at CPU 800MHz; Memory: 512MB)

- +5V : 8A (Max.)
- +12V: 500mA (Max.)
- +5Vsb: 800mA (Max.)

### Environments

- Operating temperatures: 0°C to 60°C
- Storage temperatures: -20°C to 80°C
- Relative humidity: 10% to 90% (Non-condensing)

### Certification

- CE approval
- FCC Class A

## Order Information

### PEAK 639VL2

- Full-size On Board 800MHz CPU Card with LVDS/TTL LCD, Dual Realtek 8139CLAN

**NEXCOM**

The Digital Infrastructure

- All brand name and registered trademarks referred to in this datasheet are the property of their respective owners.
- All specifications are subject to change without notice.