




## Product Related Information

### ***Pentium® II Processor Based Motherboard***

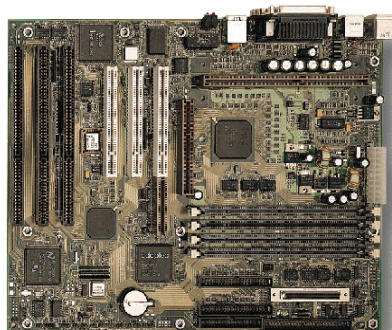

**QDI-P6I440LX/SL Legend II**

Chipset	<ul style="list-style-type: none"><li>• Intel 440LX chipset</li></ul>
Bus Type	<ul style="list-style-type: none"><li>• 3 PCI Local bus slots</li><li>• 3 ISA bus slots</li><li>• 1 RAIDport™ slot</li><li>• 1 AGP (Accelerated Graphic Port) slot</li></ul>
CPU	<ul style="list-style-type: none"><li>• Intel Pentium® II Processor 233/266/300/333 MHz</li></ul>
System Memory	<ul style="list-style-type: none"><li>• Four 168pin DIMM sockets</li></ul>

	<ul style="list-style-type: none"> <li>• Support up to 512MB SDRAM</li> <li>• Support up to 1GB EDO DRAM</li> </ul>
BIOS	<ul style="list-style-type: none"> <li>• Award Flash BIOS with Plug and Play ready</li> <li>• DMI compliance and built-in NCR 53C810 BIOS support</li> </ul>
On board IDE	<ul style="list-style-type: none"> <li>• Two Bus Master IDE ports</li> <li>• Support up to PIO mode 4 and DMA mode 2</li> <li>• Support Ultra DMA/ ATA</li> </ul>
I/O Feature	<ul style="list-style-type: none"> <li>• Two high speed serial ports (16550 Fast UART compatible)</li> <li>• One enhanced parallel port (SPP/EPP/ECP support)</li> <li>• One floppy port supports up to 2 floppy drives (360K/720K/1.2M/1.44M/2.88M)</li> <li>• On-board two USB connectors</li> <li>• Support IrDA infrared</li> <li>• On-board PS/2 mouse and PS/2 keyboard connectors</li> </ul>
Onboard SCSI	<ul style="list-style-type: none"> <li>• Adaptec AIC-7880 SCSI controller</li> <li>• One 68-pin Ultra-wide SCSI controller</li> <li>• One 50-pin Ultra SCSI connector</li> </ul>
Onboard LAN	<ul style="list-style-type: none"> <li>• Intel 82557 MAC + NS83840A 10/100Mbps LAN controller</li> </ul>
Green Function	<ul style="list-style-type: none"> <li>• Support ACPI (Advanced Configuration Power Interface) compliance</li> <li>• Three Green mode support: Doze, Standby and Suspend</li> </ul>
Advanced Feature	<ul style="list-style-type: none"> <li>• SpeedEasy for jumperless CPU upgrade or jumper emulation mode</li> <li>• Intelligent Monitoring System (LM78 &amp; LM75) for system voltages, temperature, chassis intrusion and FAN speed (optional)</li> <li>• Support LS-120 Floppy drive</li> <li>• Multi-boot support for Floppy, IDE, SCSI, LS-120, CD-ROM..etc</li> <li>• On board switching voltage regulator (support 1.8V to 3.5V)</li> <li>• Support ECC (Error Checking and Correction)</li> <li>• Support LDCM (LANdesk Client Manager) software (optional)</li> <li>• Support Windows 95 software power shutdown</li> <li>• Support system wake-up by Modem Ring-On and Alarm-On</li> </ul>
Board Size	<ul style="list-style-type: none"> <li>• 305mm X 244mm</li> </ul>



---

| [Home](#) | [Company Profile](#) | [Product Information](#) | [Sales Offices](#) |

| [What's New](#) | [Job Opportunities](#) | [SpeedEasy](#) | [Feedback](#) |

Copyright © 1997 QDI Group. All rights reserved