

# SUPERMICR

## SUPER P6SNA Specifications

---

### PROCESSOR

- Single Pentium Pro processor 200/180/166/150 MHz
- Integrated 256/512KB non-blocking L2 cache built-in
- Single ZIF (Zero Insertion Force) socket 8

### CHIPSET

- Intel 440 FX PCIset

### EXPANSION

- 4 full length 32-bit PCI slots
- 4 full length 16-bit ISA slots

### SYSTEM MEMORY

- 4/8/16/32/64/128 MB 32/36-bit FPM or EDO
- 4 72-pin SIMM sockets support 8MB to 512MB
- ECC (Error Checking and Correction) support

### ON BOARD I/O


- 2 ATX USB (Universal Serial Bus) ports
- 1 ATX PS/2 mouse
- 1 ATX PS/2 KB
- ATX ECP/EPP parallel port
- 2 ATX fast UART 16550 serial ports
- 2 EIDE interfaces
- 1 floppy interface
- 1 IR port
- Built-in thermal control

### BIOS

- AMI flash BIOS
- PnP (Plug and Play) support

### DIMENSIONS

- ATX size 12" x 9.8"

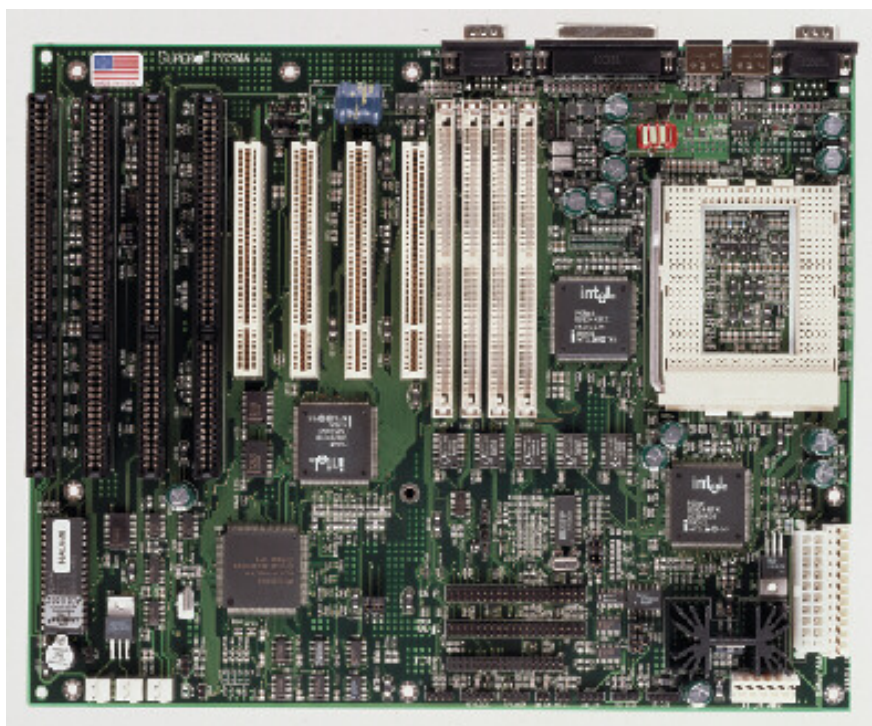

[\[P6SNA\]](#) Click here to see a picture of the board

[\[HOME\]](#) Back to Home Page