




## SUPER P6SNS

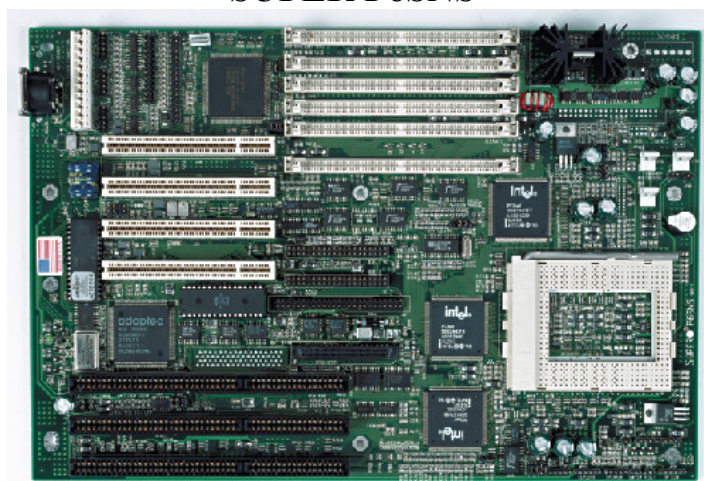

### SUPER P6SNS Specifications

#### PROCESSOR

Single Pentium Pro processor 200/180/166/150 MHz  
Integrated 256/512KB non-blocking L2 cache built-in  
Single ZIF (Zero Insertion Force) socket 8

#### CHIPSET

Intel 440 FX PCIset

#### EXPANSION

4 32-bit PCI slots  
3 16-bit ISA slots

#### SYSTEM MEMORY

4/8/16/32/64/128 MB 32/36-bit FPM or EDO  
6 72-pin SIMM sockets support 8MB to 768MB  
ECC (Error Checking and Correction) support

#### ON BOARD I/O

Adaptec 2940UW 100% compatible  
68-pin 16-bit Wide SCSI External  
68-pin 16-bit Wide SCSI Internal  
50-pin 8-bit SCSI II Internal  
2 EIDE interfaces  
1 floppy interface  
ECP/EPP parallel port  
2 fast UART 16550 serial ports  
2 USB (Universal Serial Bus) ports  
1 PS/2 mouse (cable optional)  
1 IR port  
Built-in thermal control

#### BIOS

AMI flash BIOS  
PnP (Plug and Play) support

#### DIMENSIONS

Baby AT size 13.2" x 8.8"

Copyright © 1997 SUPERMICRO COMPUTER INC.  
Last modified: August 25, 1997

Information in this document is subject to change without notice.

Other products and companies referred to herein are trademarks or registered trademarks of their respective companies or mark holders.