





# VIA EPIA Mini-ITX Mainboard

*Ultra Compact x86 Embedded Platform for the Next Generation of Digital Information and Entertainment Devices*

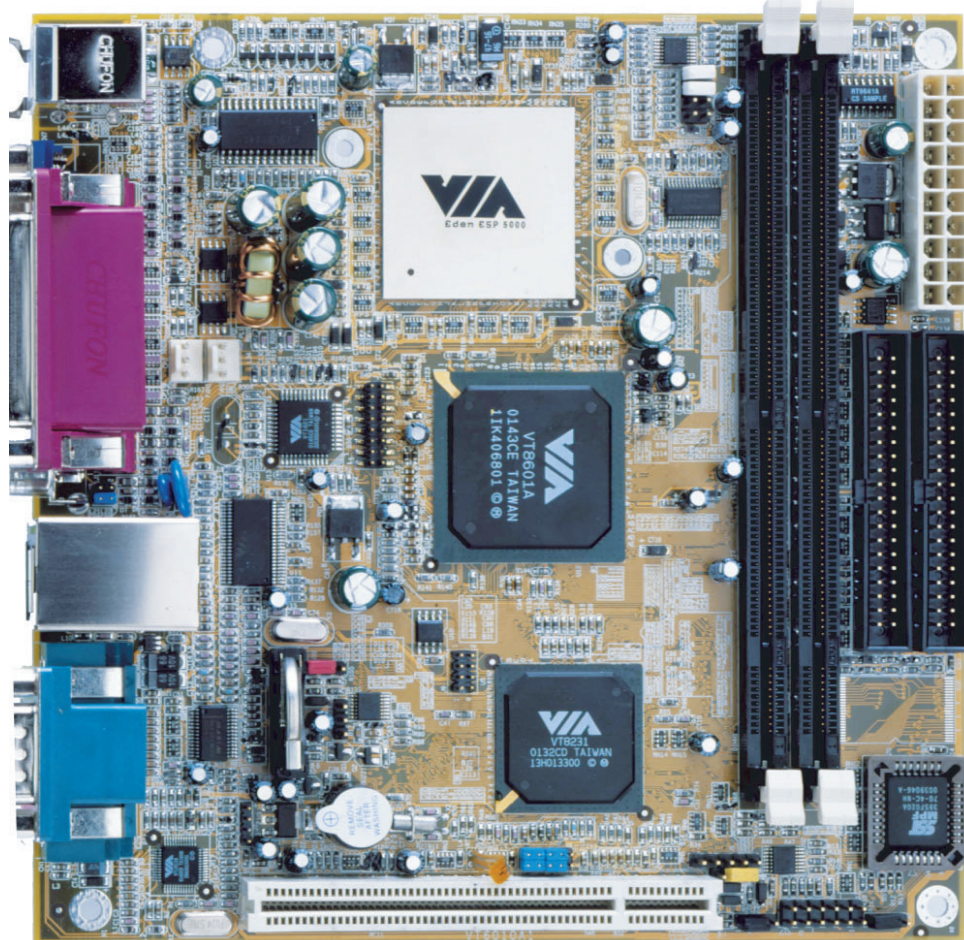

The VIA EPIA Mini-ITX mainboard brings the industry's smallest, most highly integrated, and most flexible x86 platform to OEMs and System Integrators looking for solutions that offer the maximum of features without sacrificing design flexibility. Offering the choice of a VIA Eden™ ESP processor core for fanless systems with power sensitive requirements, or a VIA C3™ E-Series processor for more multimedia rich applications, the EPIA Mini-ITX mainboard also features embedded onboard graphics, audio and TV-Out support. The VIA EPIA Mini-ITX mainboard is the ideal platform for an almost unlimited variety of Extreme Value PC, Information Appliance, Set Top Box, Personal Video Recorder, and Industrial PC designs.

Measuring just 170mm x 170mm, the VIA EPIA Mini-ITX mainboard is 30% smaller than the smallest Flex-ATX platforms, while maintaining Micro ATX chassis compliancy. It also provides the smallest and coolest processing environment available, including an optional fanless configuration. The VIA Apollo PLE133 North Bridge features integrated graphics with 2D/3D acceleration and DVD Motion Compensation, accompanied by onboard SoundBlaster™ and SoundBlaster™ Pro compatible audio, delivering key multimedia capabilities. Onboard 10/100 LAN, TV-Out, an additional PCI slot, and a full set of I/O features provide ample connectivity and expansion options.

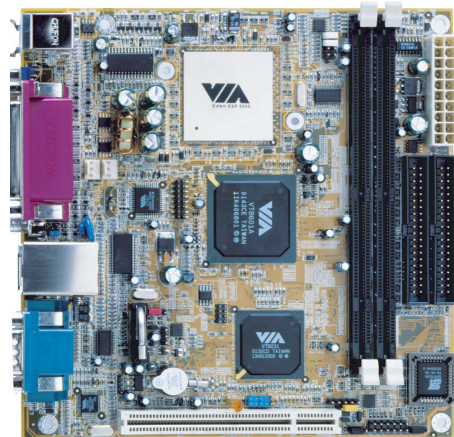

# VIA EPIA Mini-ITX Mainboard

*Ultra Compact x86 Embedded Platform for the Next Generation of Digital Information and Entertainment Devices*

### Sales Information

Contact one of these offices for information on VIA Mainboards

**VIA Headquarters**  
**VIA Technologies, Inc.**  
 533 Chung Cheng Road 8F  
 Hsin Tien, Taipei,  
 Taiwan  
 Tel: 886 2 2218 5452  
 Fax: 886 2 2218 5453  
 Email: mkt@via.com.tw

**China**  
**VIA Technologies, Inc.**  
 6F, Dascom Tower, 9  
 Shangdi East Road,  
 Haidian District, Beijing,  
 100085  
 Tel: 86-10-6296 3088  
 Fax: 86-10-6297 2929

**Europe**  
**VIA Technologies GmbH**  
 Mottmann Strasse 12,  
 53842 Troisdorf-Oberlar  
 Germany  
 Tel: 49 2241 397780  
 Fax: 49 2241 3977819  
 Email: sales@viac3.de

**USA**  
**VIA Technologies, Inc.**  
 940 Mission Court,  
 Fremont, CA 94539  
 Tel: 510 683 3300  
 Fax: 510 587 4699

<b>Form Factor</b>	- Mini-ITX - 170mm x 170mm - Micro ATX Chassis Compliant
<b>Processor</b>	- VIA Eden™ ESP processor - 100/133MHz Front Side Bus - Low power consumption - Fanless - VIA C3™ processor EPGA package up to 800MHz - 100/133MHz Front Side Bus - 128K L1 and 64K L2 cache
<b>Chipset</b>	- VIA Apollo PLE133 - VT8601A North Bridge Featuring integrated AGP 2X graphics - VIA VT8231 South Bridge
<b>TV-Out</b>	- High quality scaling and filtering - S-Video or Composite video output - Support NTSC/PAL TV formats
<b>Main Memory</b>	- Two 168-pin DIMM memory sockets - PC100/133 SDRAM support
<b>LAN</b>	- VIA 10/100 Ethernet LAN onboard
<b>Graphics</b>	- Integrated AGP2X with 2D/3D Graphics Acceleration - Motion Compensation for DVD playback - Video in port
<b>Audio</b>	- VIA VT1612A AC'97 onboard - 3 Audio Jacks - Line-Out, Line-In and Microphone-In - Sound Blaster, Sound Blaster Pro Compatible - Digital I/O compatible with consumer mode S/PDIF
<b>Expansion Slots</b>	- 1 PCI slot
<b>Onboard IDE</b>	- ATA/100/66
<b>I/O Ports</b>	- 3 Audio Jacks - Line-out, Mic-in and Line-in - 2 USB ports - 1 EPP/ECP parallel port - 1 16C550 compatible serial port - 2 External PS/2 Compatible Keyboard /Mouse ports - 2 TV output ports (S-Video or optional RCA TV out) - 1 S/PDIF out (optional and multiplex with RCA TV out) - 1 RJ45 LAN port
<b>Power Supply</b>	- ATX Power Supply Compliant

