


DIGITAL EQUIPMENT CORPORATION  
DEC EtherWORKS Turbo

**NIC Type** Ethernet  
**Transfer Rate** 10Mbps  
**Data Bus** 16-bit ISA  
**Topology** Linear Bus  
**Wiring Type** RG-58A/U 50ohm coaxial  
 AUI transceiver via DB-15 port  
**Boot ROM** Available

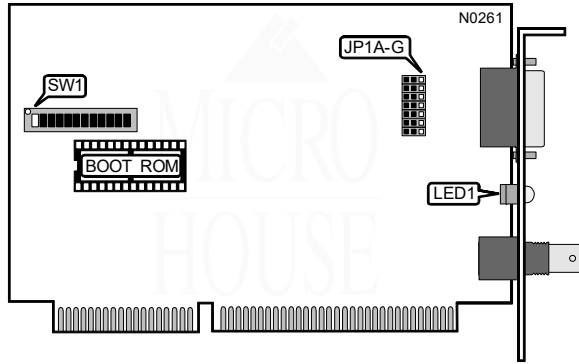

CABLE TYPE	
Type	JP1A - JP1G
iRG-58A/U 50ohm coaxial	Pins 2 & 3 Closed
AUI transceiver via DB-15 port	Pins 1 & 2 Closed

BASE MEMORY ADDRESS					
Address	Buffer Size	SW1/1	SW1/2	SW1/3	SW1/4
C0000-CFFFFh	64KB	On	On	On	On
C8000-CFFFFh	32KB	On	On	Off	Off
D0000-DFFFFh	64KB	On	Off	On	On
D8000-DFFFFh	32KB	On	Off	Off	Off
E0000-EFFFFh	64KB	Off	On	On	On
E8000-EFFFFh	32KB	Off	On	Off	Off

I/O BASE ADDRESS	
Address	SW1/5
i300 - 30Fh	On
200 - 20fh	Off

Continued on next page . . .

DIGITAL EQUIPMENT CORPORATION  
DEC EtherWORKS Turbo

... continued from previous page

BOOT ROM	
Setting	SW1/6
Disabled	On
Enabled	Off

BOOT ROM TIMEOUT	
Setting	SW1/7
Boot ROM timeout select 30 seconds	Off
Boot ROM timeout select 150 seconds	On

INTERRUPT REQUEST					
IRQ	SW1/8	SW1/9	SW1/10	SW1/11	SW1/12
5	On	Off	Off	Off	Off
9	Off	On	Off	Off	Off
10	Off	Off	On	Off	Off
11	Off	Off	Off	On	Off
15	Off	Off	Off	Off	On

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Amber	On for 20 sec., then off	Card is performing a self-test
LED1	Amber	On	Fault has occurred, displays error code on screen.