


# DIGITAL EQUIPMENT CORPORATION

## DEC EtherWORKS Turbo\_TP/BNC

<b>NIC Type</b>	Ethernet
<b>Transfer Rate</b>	10Mbps
<b>Data Bus</b>	16-bit ISA
<b>Topology</b>	Star
	Linear Bus
<b>Wiring Type</b>	Shielded/Unshielded twisted pair
	RG-58A/U 50ohm coaxial
<b>Boot ROM</b>	Available

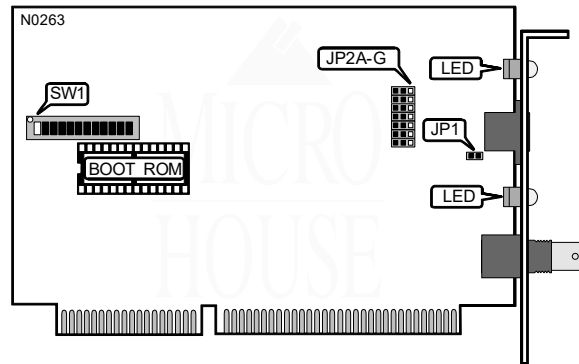

CABLE TYPE		
Type	JP1	JP2A - JP2G
iRG-58A/U 50ohm coaxial	N/A	Pins 2 & 3 Closed
Shielded Twisted Pair	Closed	Pins 1 & 2 Closed
Shielded/Unshielded twisted pair	Open	Pins 1 & 2 Closed

BASE MEMORY ADDRESS					
Address	Buffer Size	SW1/1	SW1/2	SW1/3	SW1/4
C0000-CFFFh	64KB	On	On	On	On
C8000-CFFFh	32KB	On	On	Off	Off
iD0000-DFFFFh	64KB	On	Off	On	On
D8000-DFFFFh	32KB	On	Off	Off	Off
E0000-EFFFh	64KB	Off	On	On	On
E8000-EFFFh	32KB	Off	On	Off	Off

I/O BASE ADDRESS	
Address	SW1/5
i300 - 30Fh	On
200 - 20Fh	Off

Continued on next page . . .

DIGITAL EQUIPMENT CORPORATION  
 DEC EtherWORKS Turbo\_TP/BNC

... continued from previous page

BOOT ROM	
Setting	SW1/6
iDisabled	On
Enabled	Off

BOOT ROM TIMEOUT	
Setting	SW1/7
iBoot ROM timeout select 30 seconds	Off
Boot ROM timeout select 150 seconds	On

INTERRUPT REQUEST					
IRQ	SW1/8	SW1/9	SW1/10	SW1/11	SW1/12
i5	On	Off	Off	Off	Off
9	Off	On	Off	Off	Off
10	Off	Off	On	Off	Off
11	Off	Off	Off	On	Off
15	Off	Off	Off	Off	On

DIAGNOSTIC LED(S)		
Color	Status	Condition
Amber	On for 20 sec., then off	Card is performing a self-test
Amber	On	Fault has occurred, displays error code on screen.
Green	Blinking	Data is being received
Green	Off	Data is not being received