


DIAMOND FLOWER, INC.
NET - 300

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 8-bit ISA
Topology Linear Bus
Wiring Type RG--58A/U 50ohm coaxial
 AUI transceiver via DB-15 port
Boot ROM Available

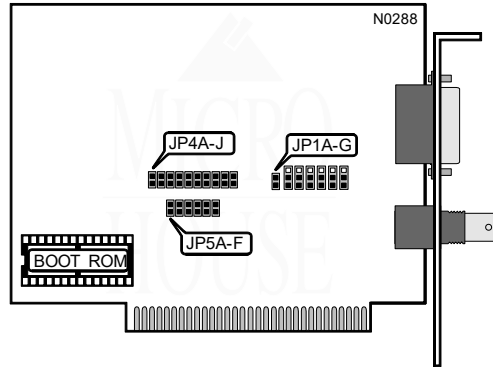

CABLE TYPE		
Type	JP1A	JP1B-JP1G
RG--58A/U 50ohm coaxial	Closed	Pins 2 & 3 Closed
AUI transceiver via DB-15 port	Open	Pins 1 & 2 Closed

INTERRUPT REQUEST				
IRQ	JP4A	JP4B	JP4C	JP4D
2	Closed	Open	Open	Open
3	Open	Closed	Open	Open
4	Open	Open	Closed	Open
5	Open	Open	Open	Closed

I/O BASE ADDRESS		
Address	JP4I	JP4J
300h	Closed	Closed
320h	Closed	Open
340h	Open	Closed
360h	Open	Open

BOOT ROM	
Setting	JP5A
Disabled	Open
Enabled	Closed

Continued on next page . . .

DIAMOND FLOWER, INC.
NET - 300

... continued from previous page

BOOT ROM ADDRESS					
Address	JP5B	JP5C	JP5D	JP5E	JP5F
C0000h	Closed	Closed	Closed	Closed	Closed
C2000h	Open	Closed	Closed	Closed	Closed
C4000h	Closed	Open	Closed	Closed	Closed
C6000h	Open	Open	Closed	Closed	Closed
C8000h	Closed	Closed	Open	Closed	Closed
CA000h	Open	Closed	Open	Closed	Closed
CC000h	Closed	Open	Open	Closed	Closed
CE000h	Open	Open	Open	Closed	Closed
D0000h	Closed	Closed	Closed	Open	Closed
D2000h	Open	Closed	Closed	Open	Closed
D4000h	Closed	Open	Closed	Open	Closed
D6000h	Open	Open	Closed	Open	Closed
D8000h	Closed	Closed	Open	Open	Closed
DA000h	Open	Closed	Open	Open	Closed
DC000h	Closed	Open	Open	Open	Closed
DE000h	Open	Open	Open	Open	Closed
E0000h	Closed	Closed	Closed	Closed	Open
E2000h	Open	Closed	Closed	Closed	Open
E4000h	Closed	Open	Closed	Closed	Open
E6000h	Open	Open	Closed	Closed	Open
E8000h	Closed	Closed	Open	Closed	Open
EA000h	Open	Closed	Open	Closed	Open
EC000h	Closed	Open	Open	Closed	Open
EE000h	Open	Open	Open	Closed	Open
F0000h	Closed	Closed	Closed	Open	Open
F2000h	Open	Closed	Closed	Open	Open

FACTORY CONFIGURED SETTINGS	
Jumper	Setting
JP4E-JP4H	Open