


3COM CORPORATION ETHERLINK III (3C590-COMBO)

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Boot ROM	Available (location unidentified)
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair AUI transceiver via DB-15 port RG-58A/U 50ohm coaxial
Data Bus	32-bit PCI

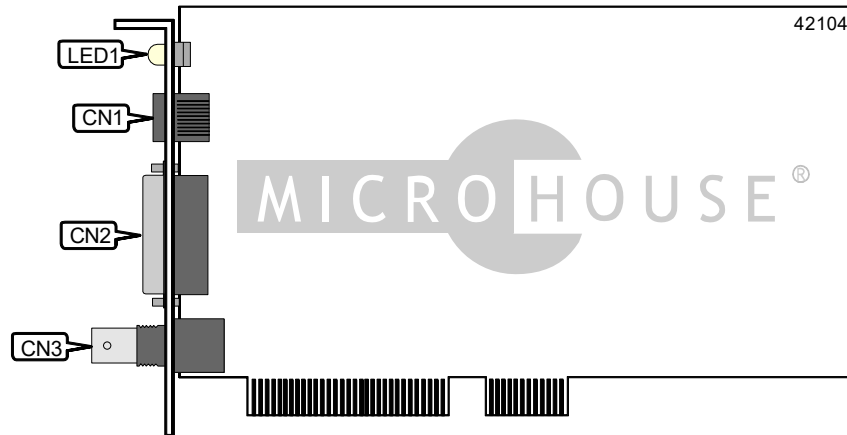

CONNECTIONS			
Function	Label	Function	Label
Unshielded twisted pair via RJ-45	CN1	RG-58A/U 50ohm coaxial port	CN3
AUI transceiver via DB-15 port	CN2		

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	10Base-T network connection is good
LED1	Blinking	10Base-T cable polarity is reversed
LED1	Off	10Base-T network connection is broken
Note: When you first install the adapter and power up the computer, the LED lights, but the network connection is not active. For the network connection to be good you need to run the Group 3 test or have loaded the network drivers.		