


DIGITAL EQUIPMENT CORPORATION

DIGITAL SERVER 3300/3300R

Configuration

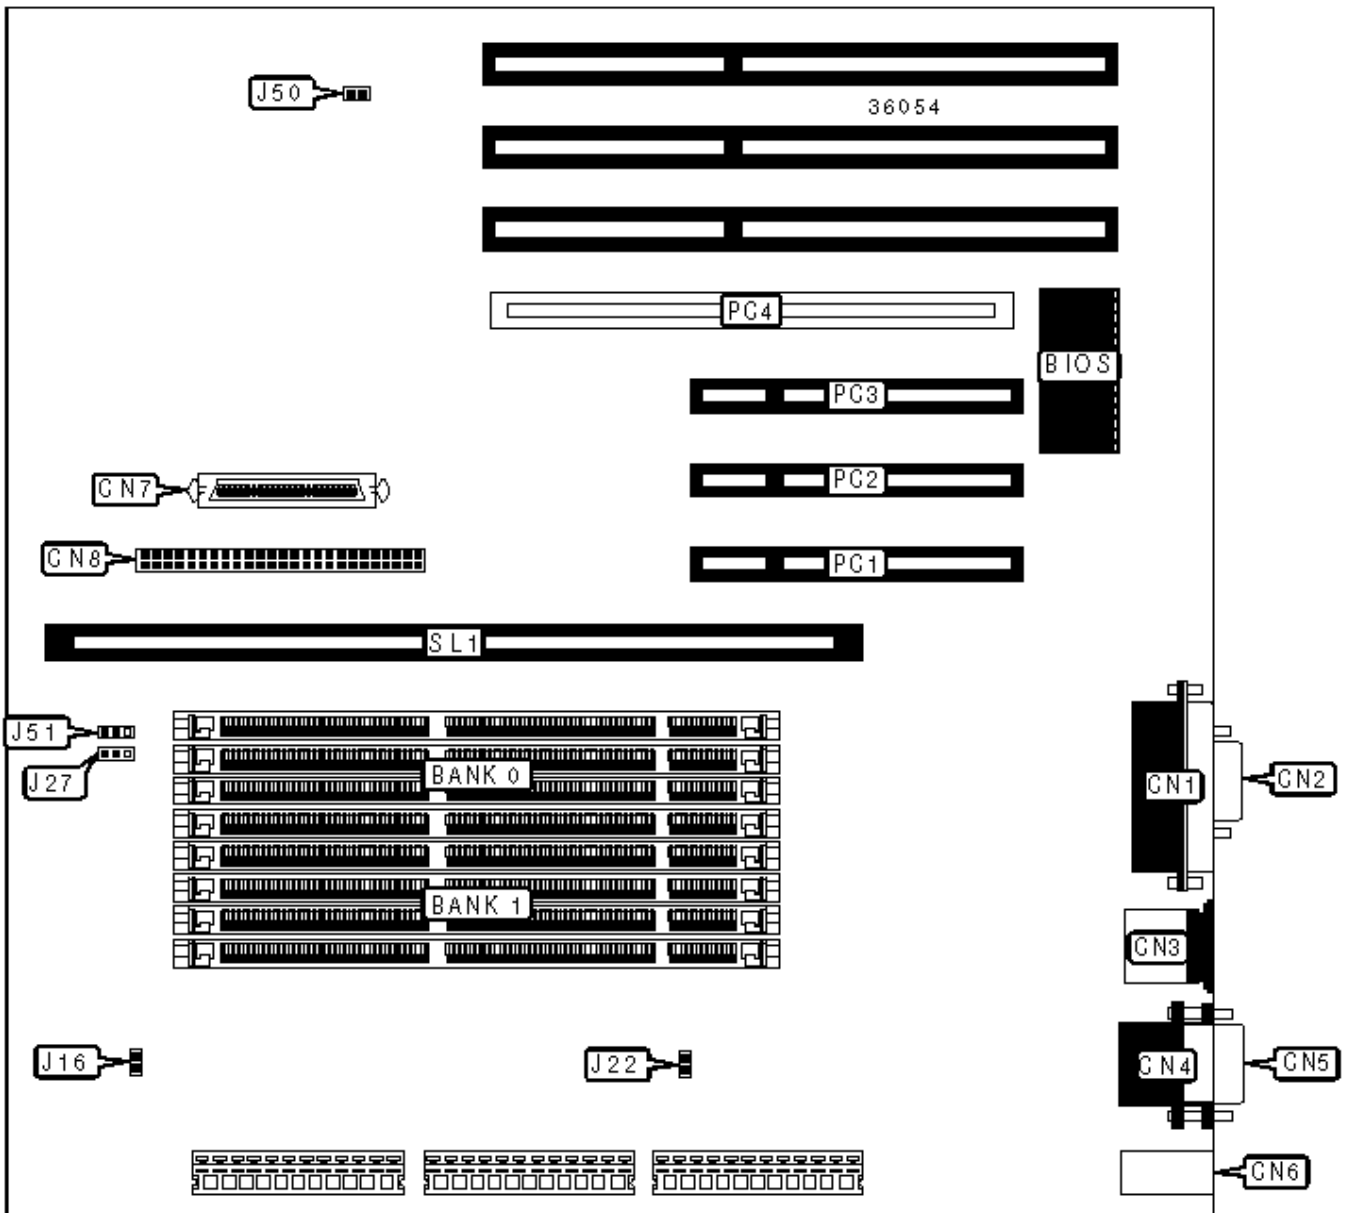

CONNECTIONS

Purpose	Location	Purpose	Location
Parallel port	CN1	Wide SCSI interface	CN7
VGA port	CN2	SCSI interface	CN8
PS/2 mouse port	CN3	32-bit PCI slots	PC1 - PC3
Serial port	CN4	64-bit PCI slot	PC4
Serial port	CN5	CPU slot	SL1
Serial port (MMJ)	CN6		

USER CONFIGURABLE SETTINGS

Function	Label	Position
» Factory configured - do not alter	J16	Open
» Remote management console disabled	J22	Open
Remote management console enabled	J22	Closed
» On board video enabled	J27	Pins 1 & 2 closed
On board video disabled	J27	Pins 2 & 3 closed
» Flash BIOS VPP enabled	J50	Closed
Flash BIOS VPP disabled	J50	Open
» SCSI termination enabled	J51	Pins 1 & 2 closed
SCSI termination disabled	J51	Pins 2 & 3 closed

DIMM CONFIGURATION

Size	Bank 0	Bank 1
32MB	(4) 1M x 64	None
64MB	(4) 2M x 64	None
64MB	(4) 1M x 64	(4) 1M x 64


96MB	(4) 2M x 64	(4) 1M x 64
128MB	(4) 4M x 64	None
128MB	(4) 2M x 64	(4) 2M x 64
160MB	(4) 4M x 64	(4) 1M x 64
192MB	(4) 4M x 64	(4) 2M x 64
256MB	(4) 8M x 64	None
256MB	(4) 4M x 64	(4) 4M x 64
288MB	(4) 8M x 64	(4) 1M x 64
320MB	(4) 8M x 64	(4) 2M x 64
384MB	(4) 8M x 64	(4) 4M x 64
512MB	(4) 16M x 64	None
512MB	(4) 8M x 64	(4) 8M x 64
544MB	(4) 16M x 64	(4) 1M x 64
576MB	(4) 16M x 64	(4) 2M x 64
768MB	(4) 16M x 64	(4) 8M x 64
1024MB	(4) 32M x 64	None
1024MB	(4) 16M x 64	(4) 16M x 64
2048MB	(4) 32M x 64	(4) 32M x 64

CACHE CONFIGURATION

Note: The location of the cache is unidentified.

VIDEO MEMORY CONFIGURATION

Note: The location of the video memory is unidentified.

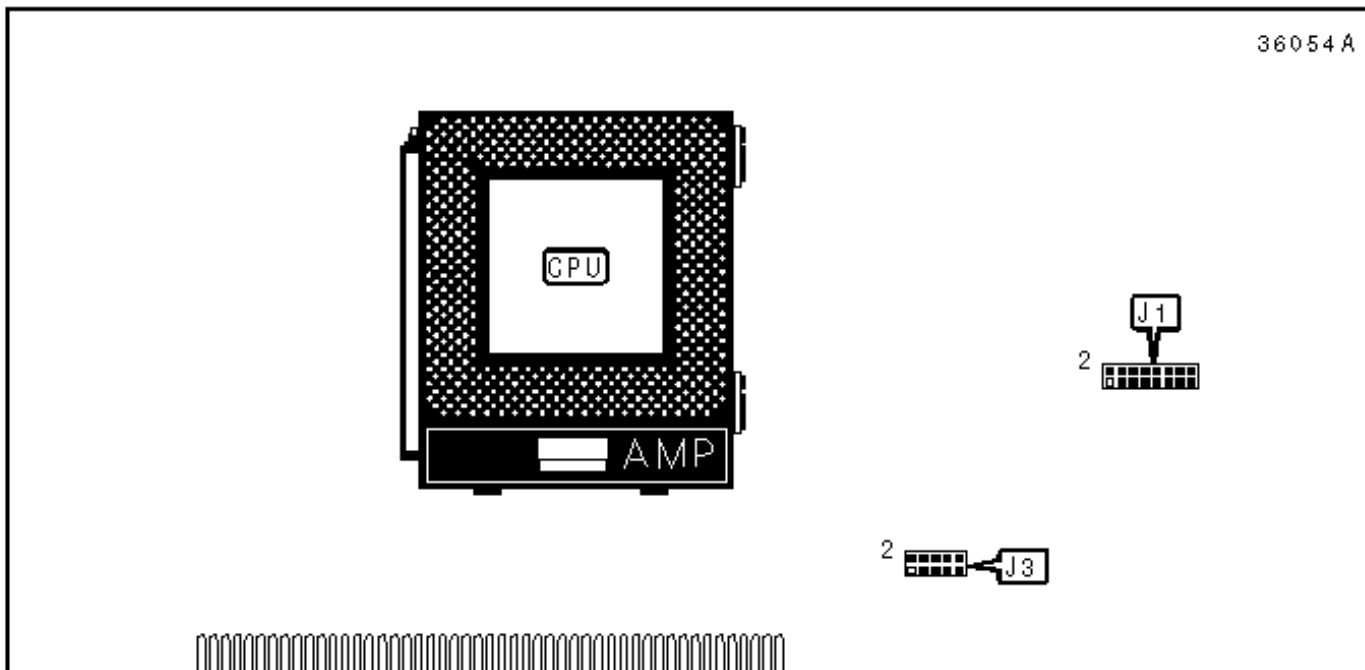

CPU BOARD

USER CONFIGURABLE SETTINGS

USER CONFIGURABLE SETTINGS		
Function	Label	Position
» Factory configured - do not alter	J1	Unidentified

CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	J3
400MHz	100MHz	4x	Pins 1 & 2, 3 & 4 closed
500MHz	100MHz	5x	Open